

**Description**

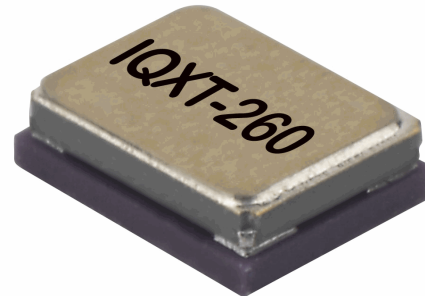
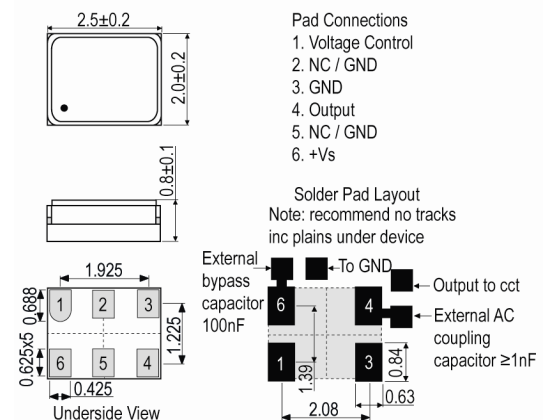
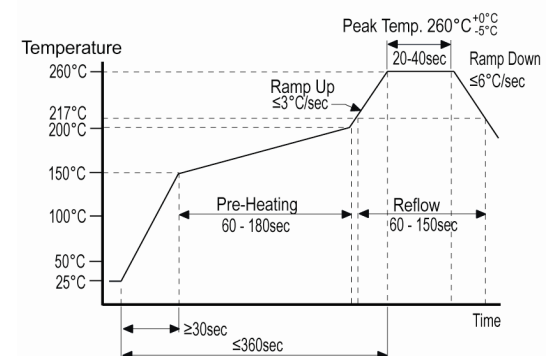
- The IQXT-260-16 employs an analogue ASIC for the oscillator and a high-order temperature compensation circuit in a 2.5 x 2.0mm size package.
- Model IQXT-260-16
- Model Issue number 1

**Frequency Parameters**

- Frequency 19.20MHz
- Frequency Tolerance  $\pm 1.00\text{ppm}$
- Tolerance Condition @ 25°C  $\pm 2^\circ\text{C}$
- Frequency Stability  $\pm 0.50\text{ppm}$
- Operating Temperature Range  $-30.00$  to  $85.00^\circ\text{C}$
- Ageing  $\pm 0.7\text{ppm}$  max over 1yr @ 25°C
- Frequency Stability: TA varied over operating temperature range, measurement referenced to frequency observed with  $F_{\text{ref}} = (F_{\text{max}} + F_{\text{min}})/2$ ,  $V_s = 2.85\text{V}$ ,  $V_C = 1.4\text{V}$  and  $\text{load} = 10\text{k}\Omega // 10\text{pF}$ .
- Frequency Slope (minimum of one frequency reading every  $2^\circ\text{C}$  and  $V_C = 1.4\text{V}$ ):  $-10^\circ\text{C}$  to  $60^\circ\text{C}$ :  $0.05\text{ppm}/^\circ\text{C}$  max
- Frequency Drift (calculated from frequency slope with temperature varied at a maximum of  $1.92^\circ\text{C}/\text{min}$  ( $0.032^\circ\text{C}/\text{s}$ ) over  $-10^\circ\text{C}$  to  $60^\circ\text{C}$ ):  $1.6\text{ppb}/\text{sec}$  max
- Frequency Slope (minimum of one frequency reading every  $2^\circ\text{C}$  and  $V_C = 1.4\text{V}$ ):  $-30^\circ\text{C}$  to  $85^\circ\text{C}$ :  $0.1\text{ppm}/^\circ\text{C}$  max
- Frequency Drift (calculated from frequency slope with temperature varied at a maximum of  $0.96^\circ\text{C}/\text{min}$  ( $0.016^\circ\text{C}/\text{s}$ ) over  $-30^\circ\text{C}$  to  $85^\circ\text{C}$ ):  $1.6\text{ppb}/\text{sec}$  max
- Note: Frequency Drift rate is calculated from the equation  $\text{ppb}/\text{s} = ^\circ\text{C}/\text{s} \times \text{ppb}/^\circ\text{C}$ .
- Small Thermal Cycle Frequency Slope (measured at  $0.5^\circ\text{C}$  intervals over any  $5^\circ\text{C}$  heating and  $5^\circ\text{C}$  cooling cycle, at a minimum rate of  $1^\circ\text{C}/\text{minute}$  within the operating temperature range):  $50\text{ppb}/^\circ\text{C}$  max  
(Note: Discard the first  $0.5^\circ\text{C}$  interval of each heating and cooling cycle.)
- Small Thermal Cycle Hysteresis (difference in frequency measurements over any  $5^\circ\text{C}$  heating and  $5^\circ\text{C}$  cooling cycle, at a minimum rate of  $1^\circ\text{C}/\text{minute}$  within the operating temperature range):  $50\text{ppb}$  pk-pk max
- Supply Voltage Variation ( $\pm 5\%$  change @  $25^\circ\text{C}$ ):  $\pm 0.1\text{ppm}$  max
- Load Variation ( $\pm 10\%$  change @  $25^\circ\text{C}$ ):  $\pm 0.2\text{ppm}$  max
- Reflow Variation (after two consecutive reflows as per profile shown and 1hr recovery @  $25^\circ\text{C}$ ):  $\pm 1\text{ppm}$  max
- Note: Parts should be shielded from drafts causing unexpected thermal gradients. Temperature changes due to ambient air currents can lead to short term frequency drift.

**Electrical Parameters**

- Supply Voltage  $2.85\text{V} \pm 0.15\text{V}$
- Current Draw  $1.50\text{mA}$
- Supply Current (@  $T_A = 25^\circ\text{C}$ ,  $V_s$  max and  $\text{load} = 10\text{k}\Omega // 10\text{pF}$ ):  $1.5\text{mA}$  max


**Outline (mm)**

**Pb-Free Reflow**

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Frequency Adjustment**

- Pulling  $\pm 15.6\text{ppm}$  to  $\pm 24.0\text{ppm}$
- Control Voltage  $1.4\text{V} \pm 1.0\text{V}$
- Input Impedance  $600\text{k}\Omega$
- Input Impedance: Measured between control voltage and GND pins.
- Linearity (deviation from a straight line curve fit): 20% max

**Output Details**

- Output Compatibility Clipped Sine
- Drive Capability  $10\text{k}\Omega//10\text{pF} \pm 10\%$
- Output Voltage Level (@  $T_A=25^\circ\text{C}$ ,  $V_S$  min and load= $10\text{k}\Omega//10\text{pF}$ ):  $1.15\text{V}$  pk-pk min
- Start Up Time (frequency within  $\pm 0.5\text{ppm}$  of steady state frequency): 2ms max
- Output: DC coupled
- Note: AC-coupled output requires an external capacitor,  $\geq 1\text{nF}$  recommended.

**Noise Parameters**

- Phase Noise @  $25^\circ\text{C}$  (max):
  - 86dBc/Hz @ 10Hz
  - 110dBc/Hz @ 100Hz
  - 137dBc/Hz @ 1kHz
  - 143dBc/Hz @ 10kHz
  - 150dBc/Hz @ 100kHz
- Harmonics: -5dBc max

**Environmental Parameters**

- Storage Temperature Range:  $-40$  to  $85^\circ\text{C}$
- Shock: MIL-STD-202 M213: Half sine wave acceleration of 3000G peak amplitude, duration 0.3ms, velocity 12.3ft/s.
- Vibration: JESD22-B103-B: 10G peak acceleration for 20mins, 12 cycles in each of the 3 orientations, tested from 10-2000Hz.
- Moisture Resistance: MIL-STD-202 M106g: 1000hrs @  $85^\circ\text{C}$ , 85% RH, biased.
- Thermal Cycling: JESD22 Method JA-104C: 1000 temperature cycles, where each cycle consists of a 25mins soak time @  $-40^\circ\text{C}$  followed by a 25mins soak time @  $85^\circ\text{C}$ , with a 60secs maximum transition time between temperatures, air to air transition.
- Note: Frequency shift  $\leq 1\text{ppm}$  after environmental conditions.

**Manufacturing Details**

- Maximum Process Temperature:  $260^\circ\text{C}$  (40secs max)

**Compliance**

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

**Packaging Details**

- Pack Style: Reel Tape & reel in accordance with EIA-481-D  
Pack Size: 3,000
- *Alternative packing option available*

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)