


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

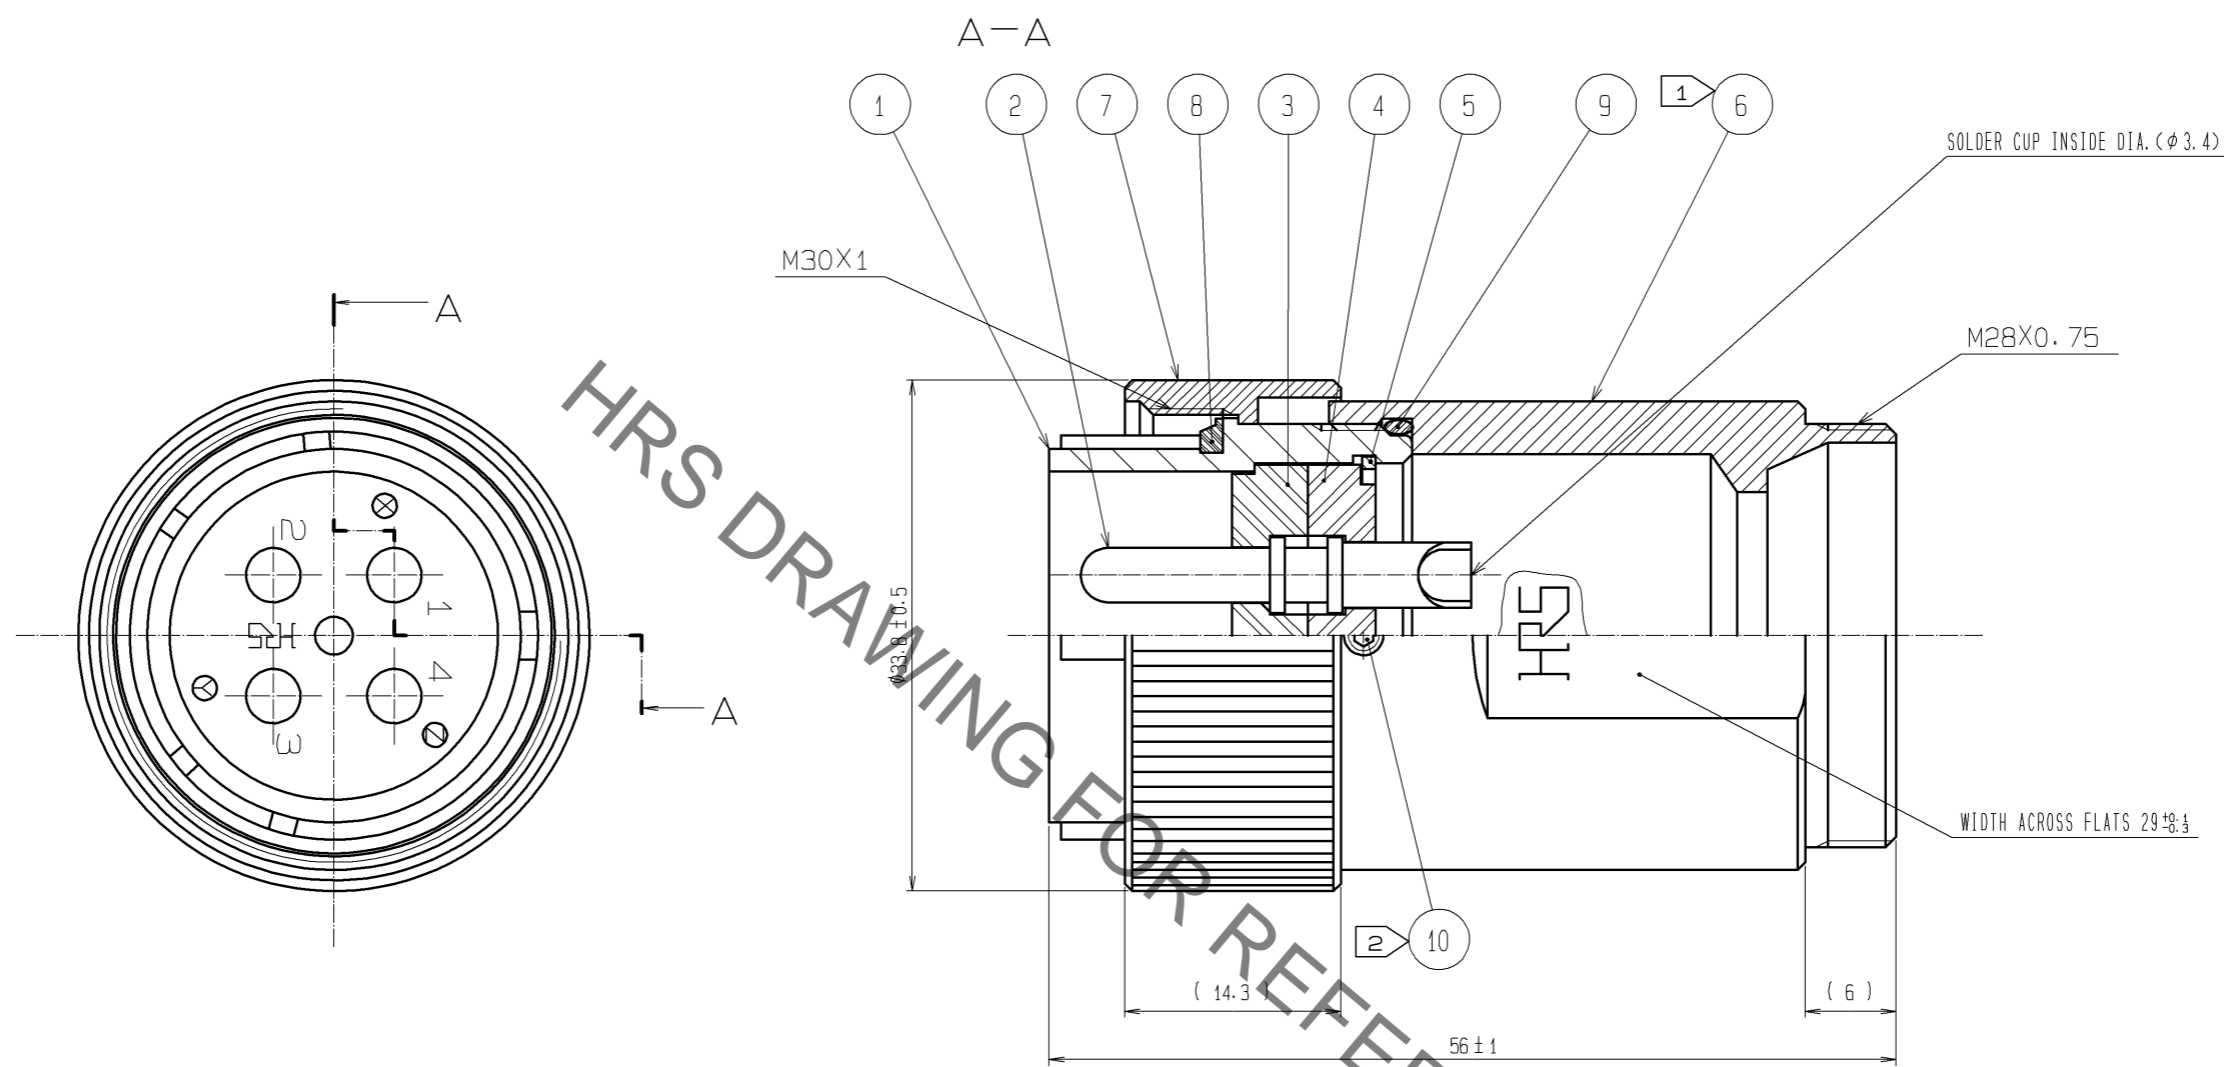

- NOTES
- ① THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑥ SHALL BE 5 TO 5.5N · m.
  - ② THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑩ SHALL BE 0.2 TO 0.25N · m.
  - 3 LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ①, ⑥ AND ⑩ FROM LOOSENING.
  - 4 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑥ TO REF. NO. ① AND THE SOLDER CUP OF REF. NO. ② ARE SHOWN.
  - 5 THIS PRODUCTS TO BE USED WITH CABLE CLAMP, JR25WCC-\*(72).  
 \*DESIGNATE DIAMETER(mm) OF APPLICABLE CABLE.  
 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.  
 PLEASE CONFIRM BEFORE THE USE.

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	HEX:1.27
4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	9	SILICONE RUBBER	(BLACK)
3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)
2	BRASS	SILVER PLATING 2μm min.	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	
				DESIGNED	CHECKED
<b>HIROSE ELECTRIC CO., LTD.</b>		APPROVED : EJ. KUNII	13. 09. 09	DRAWING NO. EDC3-118115-00	
		CHECKED : HY. KISHI	13. 09. 09	PART NO. JR25WPH-4P	
		DESIGNED : HK. NAMAI	13. 09. 09	CODE NO. CL114-2185-0-00	
		DRAWN : HK. NAMAI	13. 09. 09	1/1	