


4. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.



	2	10.00	8.00	10	1-	-1
OBSOLETE		80.00	78.00	80	8-	-0
		78.00	76.00	78	7-	-8
		76.00	74.00	76	7-	-6
		74.00	72.00	74	7	-4
		72.00	70.00	72	7-	-2
		70.00	68.00	70	7	-0
		68.00	66.00	68	6	-8
		66.00	64.00	66	6-	-6
		64.00	62.00	64	6	-4
		62.00	60.00	62	6-	-2
		60.00	58.00	60	6-	-0
		58.00	56.00	58	5	-8
		56.00	54.00	56	5-	-6
		54.00	52.00	54	5	-4
OBSOLETE		52.00	50.00	52	5-	-2
		50.00	48.00	50	5-	-0
		48.00	46.00	48	4-	-8
		46.00	44.00	46	4-	-6
OBSOLETE		44.00	42.00	44	4-	-4
		42.00	40.00	42	4-	-2
		40.00	38.00	40	4-	-0
		38.00	36.00	38	3-	-8
OBSOLETE		36.00	34.00	36	3-	-6
		34.00	32.00	34	3-	-4
		32.00	30.00	32	3-	-2
		30.00	28.00	30	3-	-0
OBSOLETE		28.00	26.00	28	2-	-8
		26.00	24.00	26	2-	-6
		24.00	22.00	24	2-	-4
		22.00	20.00	22	2-	-2
OBSOLETE		20.00	18.00	20	2-	-0
		18.00	16.00	18	1-	-8
		16.00	14.00	16	1-	-6
		14.00	12.00	14	1-	-4
OBSOLETE		12.00	10.00	12	1-	-2
		10.00	8.00	10	1-	-0
		8.00	6.00	8		-8
		6.00	4.00	6		-6
	4.00	2.00	4	1734508-4		
	A	B	POSITION NUMBER	PART NUMBER		
	KEYING POS.	DIMENSIONS				

SEE NOTE

TE Connectivity

AMPMODU 2.0mm PITCH POST HDR,
VERTICAL, MOUNT TYPE

RESTRICTED TO

REV C2





4

3

2

1

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD
				SEE SHEET 1.		

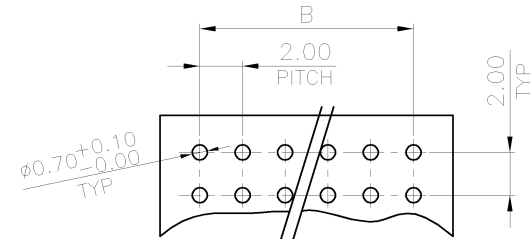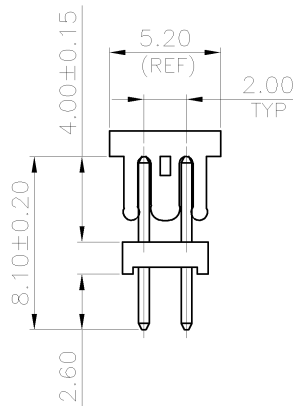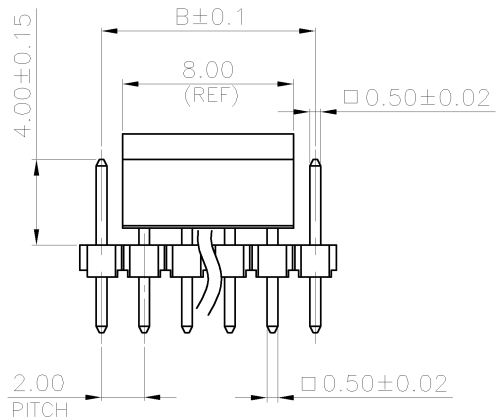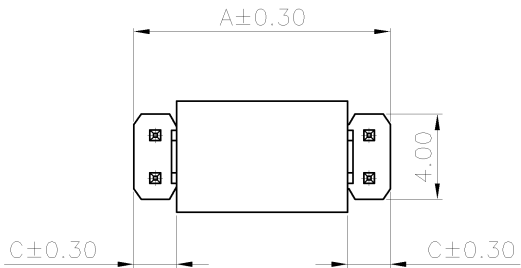

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05; THICKNESS: 1.0~1.6MM

- NOTE:
- MATERIAL:
HOUSING: PA6T WITH 30% GF, UL 94V-0, BLACK COLOR.
CAP: LCP WITH 30% GF, UL 94V-0. BLACK COLOR.
CONTACT: BRASS.
 - FINISH :
CONTACT:
0.0254um [10u"] MIN. GOLD PLATED ON CONTACT AREA
2.54um [100u"] MIN. MATTE-TIN PLATED ON SOLDER TAIL,
1.27um [50u"] MIN. NICKEL UNDERPLATED OVER ALL
 - WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC 109-202, CONDITION B.

3.00	14.00	12.00	14	9-1734508-4
2.00	12.00	10.00	12	9-1734508-2
C	A	B	POSITION NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	—	STE TE Connectivity	
DIMENSIONS: mm		CHK	—		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	—	NAME	
0 PLC ± —		PRODUCT SPEC	—	AMPMODU, 2.0mm PITCH, POST HDR, VERTICAL, MOUNT TYPE	
1 PLC ± 0.3		APPLICATION SPEC	—		
2 PLC ± 0.2		WEIGHT	—	SIZE	CAGE CODE
3 PLC ± 0.15		CUSTOMER DRAWING		A3	00779
4 PLC ± —		SCALE		DRAWING NO	
ANGLES ± — ± 3'		SHEET		C-1734508	
MATERIAL	FINISH	RESTRICTED TO		—	
SEE NOTE	SEE NOTE	REV		C2	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			



HEADER(P=2.00)
DUAL ROW SERIES(1.50)




BUSINESS ESTABLISHMENT LABEL

LABEL


BAG
150MM(L)X120MM(W)



INNER BOX

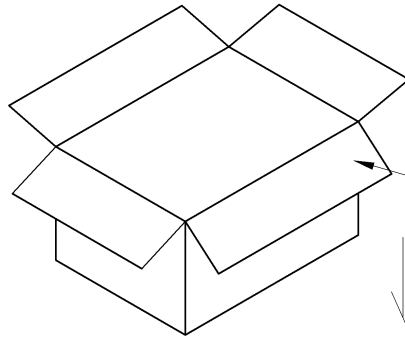


BOX



NOTE:

1. DIMENSIONS:
BOX: 392*245*260MM
INNER BOX: 218*185*80MM
PE BAG: 150*120*0.08MM

OBSOLETE	6.90 KG	5.52 KG	500	8	6	24000 PCS	10
	5.786 KG	4.406 KG	50	8	6	2400 PCS	80
	5.676 KG	4.296 KG	50	8	6	2400 PCS	78
	5.565 KG	4.185 KG	50	8	6	2400 PCS	76
	5.433 KG	4.053 KG	50	8	6	2400 PCS	74
	5.344 KG	3.964 KG	50	8	6	2400 PCS	72
	5.236 KG	3.856 KG	50	8	6	2400 PCS	70
	5.126 KG	3.746 KG	50	8	6	2400 PCS	68
	5.74 KG	4.36 KG	60	8	6	2880 PCS	66
	5.61 KG	4.23 KG	60	8	6	2880 PCS	64
OBSOLETE	5.478 KG	4.098 KG	60	8	6	2880 PCS	62
	6.006 KG	4.626 KG	70	8	6	3360 PCS	60
	5.852 KG	4.472 KG	70	8	6	3360 PCS	58
	7.548 KG	6.168 KG	100	8	6	4800 PCS	56
	7.33 KG	5.947 KG	100	8	6	4800 PCS	54
	7.106 KG	5.726 KG	100	8	6	4800 PCS	52
	6.89 KG	5.51 KG	100	8	6	4800 PCS	50
	6.669 KG	5.289 KG	100	8	6	4800 PCS	48
	6.448 KG	5.068 KG	100	8	6	4800 PCS	46
	6.228 KG	4.848 KG	100	8	6	4800 PCS	44
OBSOLETE	6.007 KG	4.627 KG	100	8	6	4800 PCS	42
	5.786 KG	4.406 KG	100	8	6	4800 PCS	40
	5.565 KG	4.185 KG	100	8	6	4800 PCS	38
	5.344 KG	3.964 KG	100	8	6	4800 PCS	36
	5.124 KG	3.744 KG	100	8	6	4800 PCS	34
	4.903 KG	3.523 KG	100	8	6	4800 PCS	32
	4.687 KG	3.307 KG	100	8	6	4800 PCS	30
	4.466 KG	3.086 KG	100	8	6	4800 PCS	28
	5.678 KG	4.298 KG	150	8	6	7200 PCS	26
	5.35 KG	3.97 KG	150	8	6	7200 PCS	24
OBSOLETE	6.23 KG	4.85 KG	200	8	6	9600 PCS	22
	5.79 KG	4.41 KG	200	8	6	9600 PCS	20
	6.35 KG	4.97 KG	250	8	6	12000 PCS	18
	5.78 KG	4.40 KG	250	8	6	12000 PCS	16
	6.00 KG	4.62 KG	300	8	6	14400 PCS	14
	5.34 KG	3.96 KG	300	8	6	14400 PCS	12
	6.90 KG	5.52 KG	500	8	6	24000 PCS	10
	5.80 KG	4.42 KG	500	8	6	24000 PCS	8
	6.68 KG	5.30 KG	800	8	6	38400 PCS	6
	5.79 KG	4.41 KG	1000	8	6	48000 PCS	4
GROSS WEIGHT		NET WEIGHT	PCS/BAG	BAGS /INNER CARTON	INNER CARTON /CARTON	QUANTITY	NO. OF POSTS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity			
		CHK				
DIMENSIONS: MM		APVD	NAME			
		PRODUCT SPEC	AMPMODU 2.0mm PITCH, POST HDR, VERTICAL, MOUNT TYPE			
		APPLICATION SPEC				
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			A3	00779	C=1734508	
CUSTOMER DRAWING			SCALE	SHEET	3 OF 4	REV C2

