
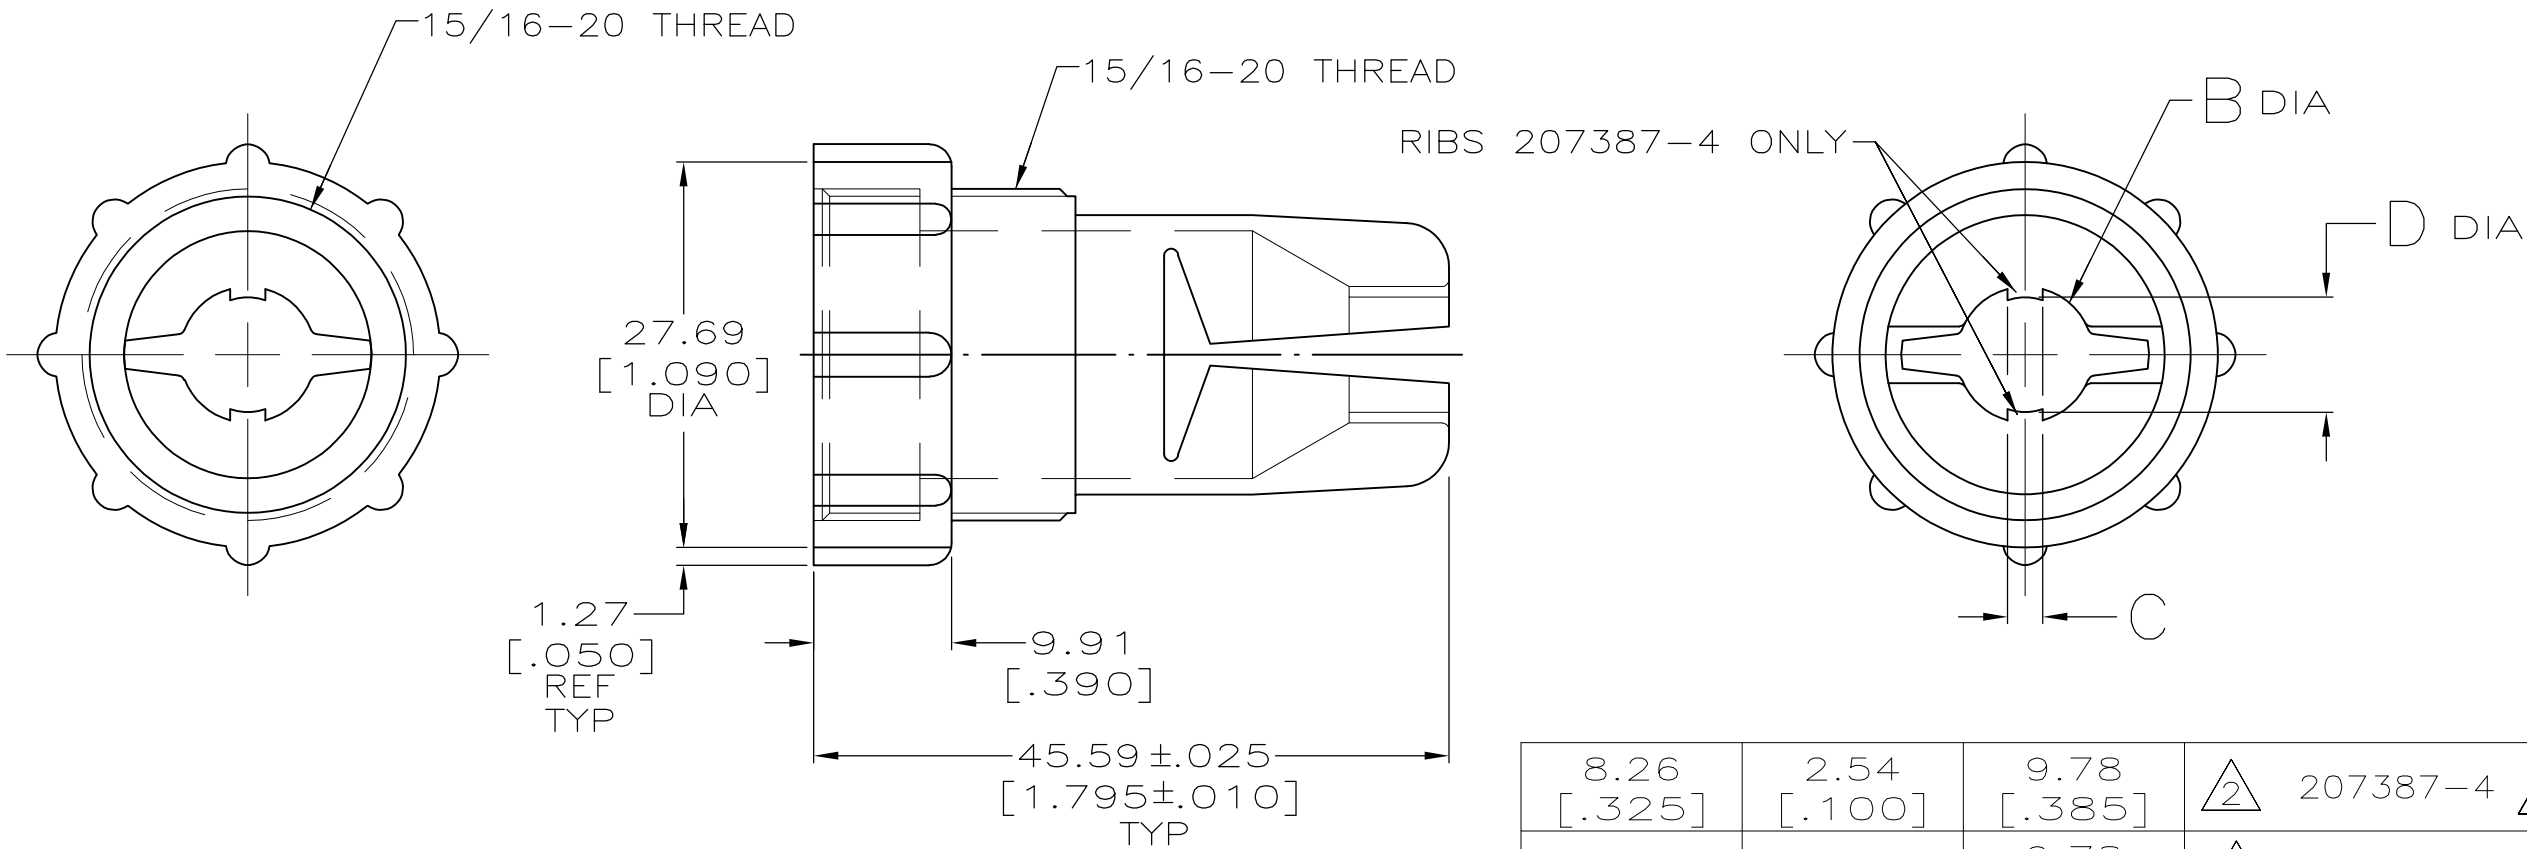




- ① CABLE RANGE OF 207387-1 WHEN USED WITH FLEXIBLE BOOT (P/N 207241-1) = 5.08-6.35[.200-.250] DIA.
- ② CABLE RANGE OF 207387-2, & 207387-4 WHEN USED WITH FLEXIBLE BOOT (P/N 207241-1) = 6.35-8.89[.250-.350] DIA.
- ③ OBSOLETE PART NUMBER.

|                |                |                |                |
|----------------|----------------|----------------|----------------|
| 8.26<br>[.325] | 2.54<br>[.100] | 9.78<br>[.385] | ② 207387-4 ③   |
| -              | -              | 9.78<br>[.385] | ② 207387-2     |
| -              | -              | 8.26<br>[.325] | ① 207387-1     |
| D              | C              | B              | PART<br>NUMBER |

|                                                                                       |                                                                                       |                            |                                                                                                       |                                                   |                    |                        |                        |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------------------|------------------------|------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |                                                                                       | DWN<br>K.FOLTZ<br>06/20/94 |  TE Connectivity |                                                   |                    |                        |                        |
|                                                                                       |                                                                                       | CHK<br>R.STONE<br>06/24/94 |                                                                                                       |                                                   |                    |                        |                        |
| DIMENSIONS:<br>MM[INCHES]                                                             | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:                                             |                            | APVD<br>A.FRANTUM<br>08/09/94                                                                         | NAME<br><br>CABLE GRIP, INTERNAL,<br>SIZE 17, CPC |                    |                        |                        |
|  | 0 PLC ± -<br>1 PLC ± -<br>2 PLC ± 0.13 [.005]<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± - |                            | PRODUCT SPEC<br><br>—                                                                                 |                                                   |                    |                        |                        |
|                                                                                       |                                                                                       |                            | APPLICATION SPEC<br><br>—                                                                             |                                                   |                    |                        |                        |
| MATERIAL<br><br>THERMOPLASTIC<br>COLOR: BLACK                                         | FINISH<br><br>—                                                                       |                            | WEIGHT<br><br>—                                                                                       | SIZE<br>A3                                        | CAGE CODE<br>00779 | DRAWING NO<br>C-207387 | RESTRICTED TO<br><br>— |
| CUSTOMER DRAWING                                                                      |                                                                                       |                            | SCALE<br>2:1                                                                                          |                                                   | SHEET<br>1 OF 1    |                        | REV<br>H1              |