

Specification Status: Released

Electrical Rating

Voltage: 32 V_{DC} MAX
Current: 100 A MAX

Insulating Material:
Cured, Flame Retardant Epoxy Polymer

Lead Material:
20 AWG Tin Plated Copper

Part Marking:

- Manufacturer's Mark And Voltage
- ⊗ 32 Part Identification
- EF5 Lot Identification (can be on back)
- □ □ □ Lot Identification (can be on back)

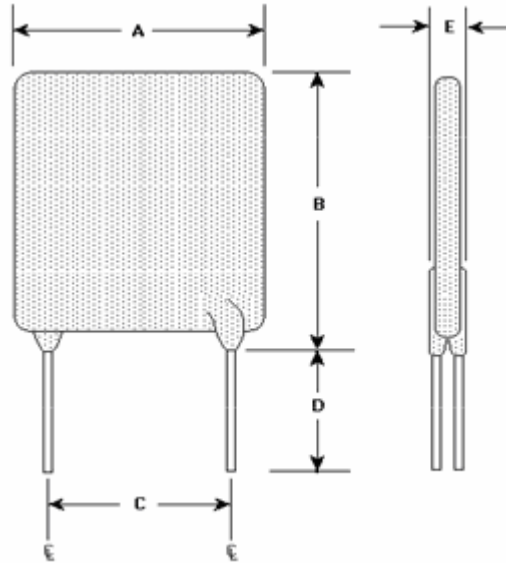


TABLE I. INSTALLATION ENVELOPE DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	14.0	--	24.1	4.3	5.8	11.5	--	--	3.8
in*:	--	(0.55)	--	(0.95)	(0.17)	(0.23)	(0.45)	--	--	(0.15)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	R _{aMAX}	TRIPPED-STATE POWER DISSIPATION
AMPS AT 25°C HOLD	AMPS AT 25°C HOLD	AMPS AT 25°C TRIP	OHMS AT 25°C		SECONDS AT 25°C, 25 A MAX	OHMS AT 25°C MAX	WATTS AT 25°C TYP
			MIN	MAX			
5.0	5.0	10.0	0.015	0.025	9.0	0.040	5.3

Reference Documents:

PS400, PS300 (reference for R₁ MAX)

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant



SUPERSEDED
NOT the LATEST REVISION