
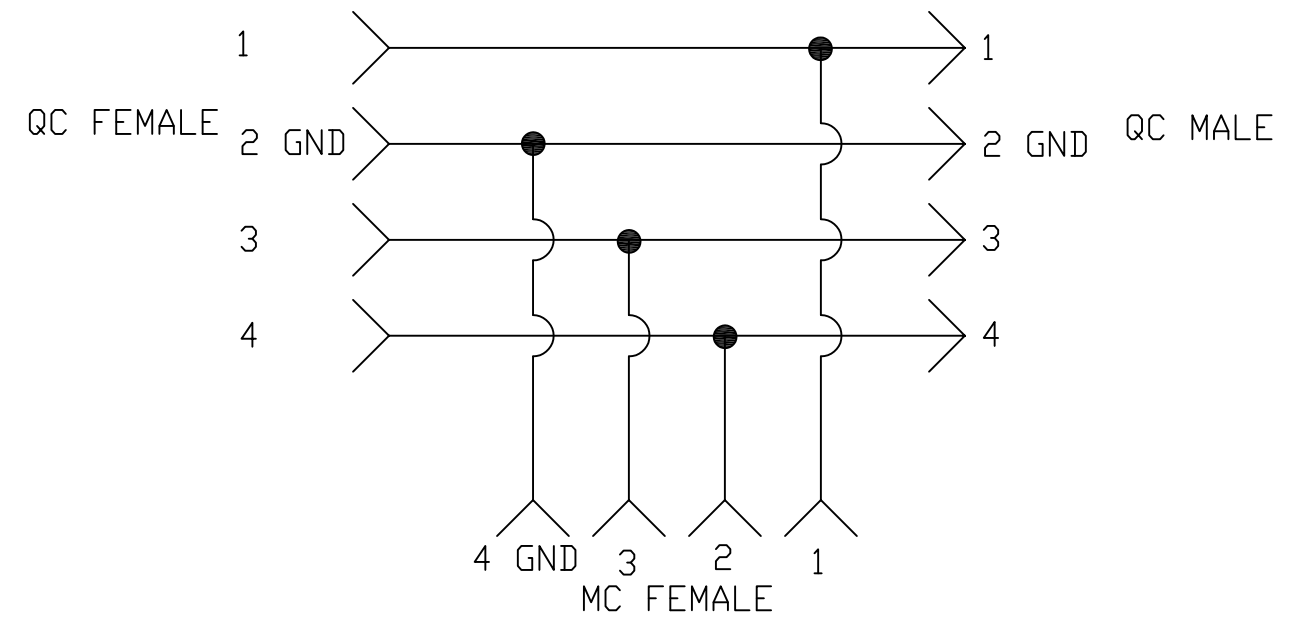
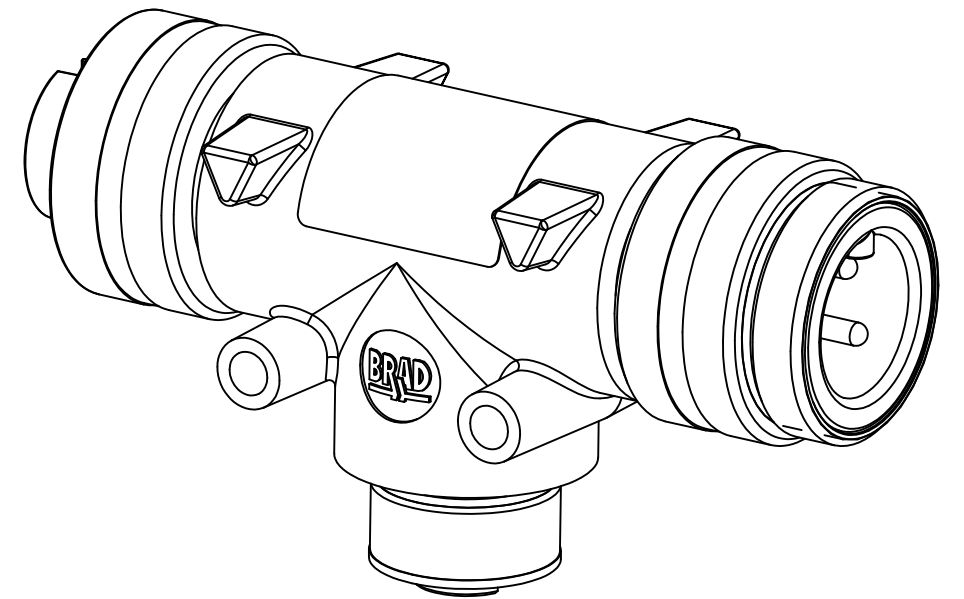
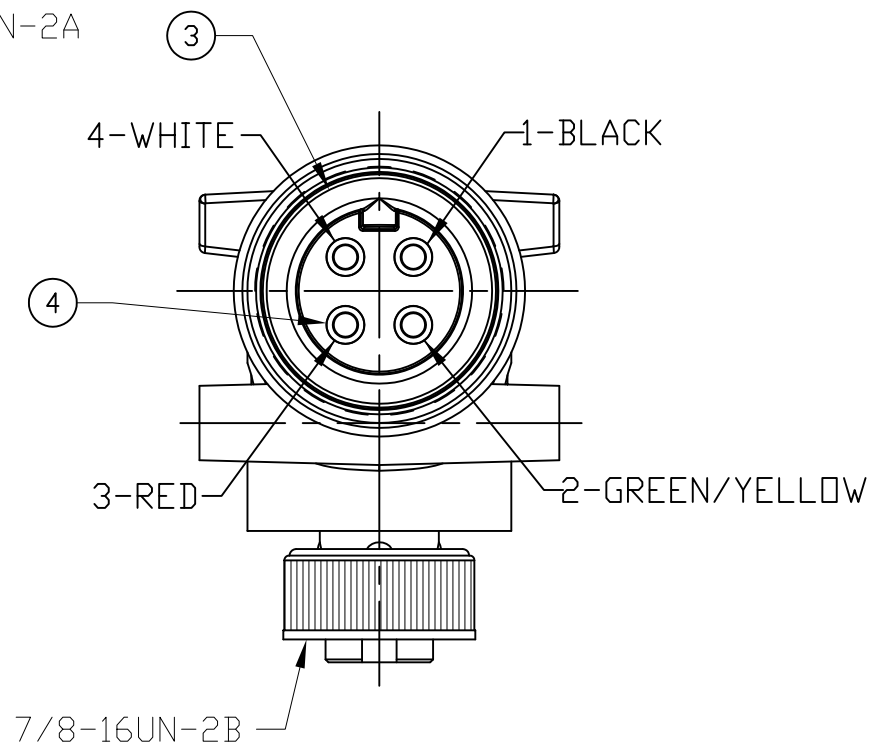
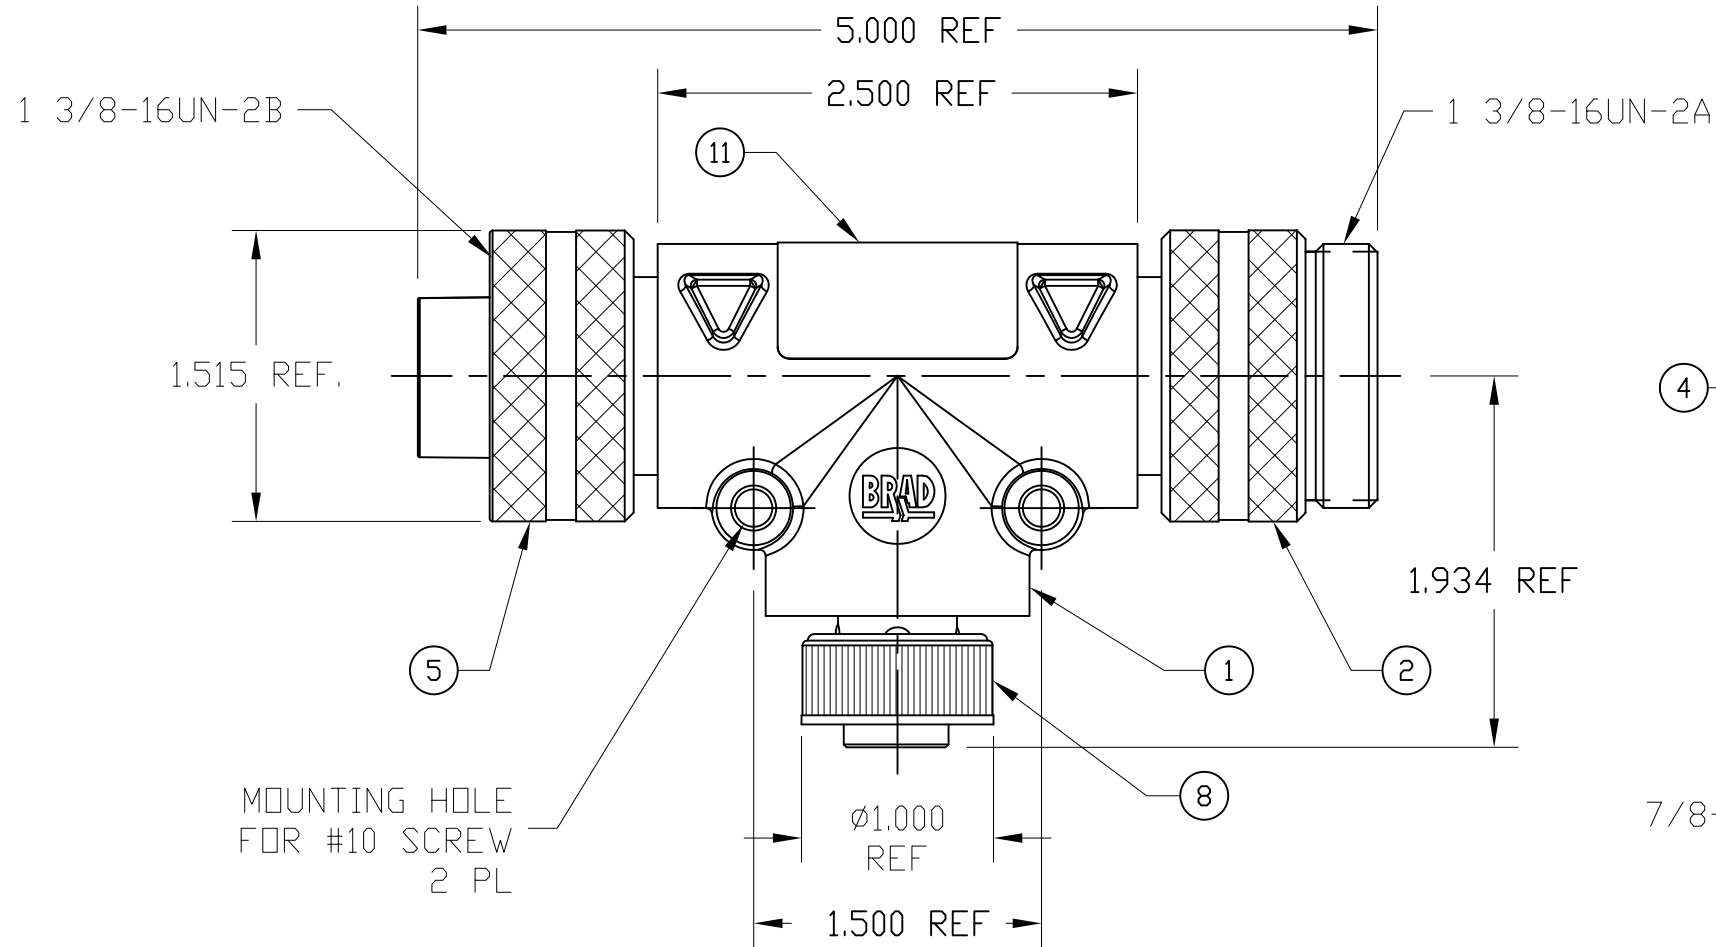


PART NUMBER	ENGINEERING NUMBER
1300680069	TC40140-200

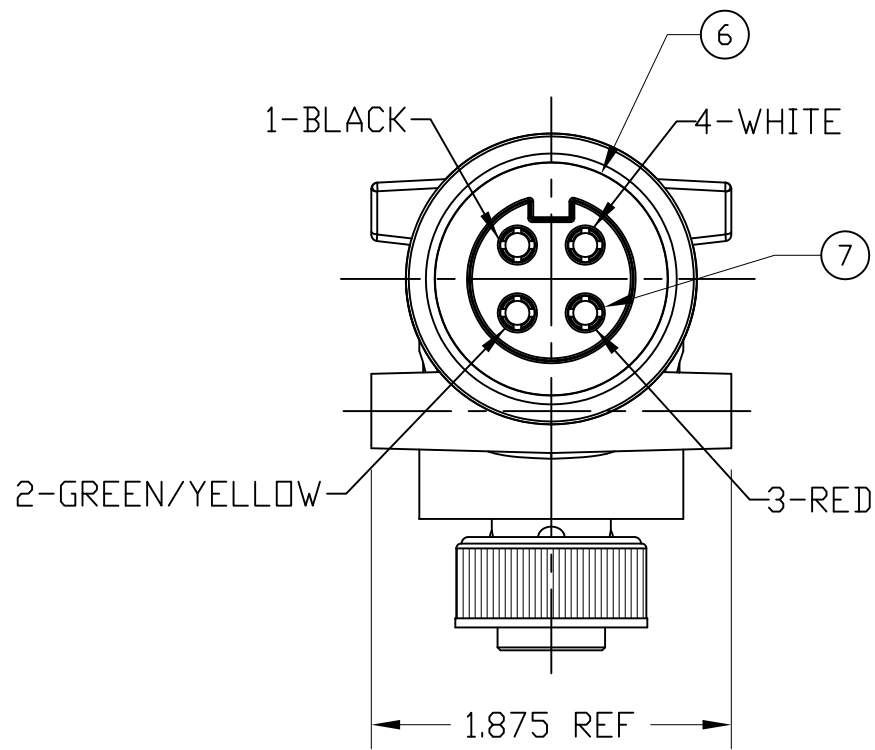

WIRE DIAGRAM

NOTE:

- 1) LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
- 2) ELECTRICAL DATA:  
REDUCING TEE QC TO MC  
POLES: 4  
MAX. VOLTAGE: 600V AC/DC  
MAX. THRU CURRENT: 25A  
MAX. DROP CURRENT: 15A  
PROTECTION: IP67  
TEMPERATURE RANGE: -20°C TO 90°C
- 3) PACKAGING:  
ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO THE OUTSIDE OF THE BAG.
- 4) ASSEMBLY IS RoHS COMPLIANT
- 5) CERTIFICATION:  
UL LISTED/CSA CERTIFIED , FILE E258922

11	1	LABEL	PLASTIC FILM	BLACK/YELLOW
10	4	MC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
9	1	MC FEMALE INSERT	PVC	BLACK
8	1	MC COUPLING NUT	ZINC ALLOY	BLACK E-COAT
7	4	QC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	1	QC FEMALE INSERT	PVC	BLACK
5	1	QC FEMALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
4	4	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	1	QC MALE INSERT	PVC	BLACK
2	1	QC MALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
1	1	OVERMOLD	PVC	GRAY
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: WNA2010-0424 DRWN: KJOZWIK 2010/01/14 CHKD: BWOODMAN APPR: JFMURPHY 2010/01/15 A	DESCRIPTION REV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
		<div>▽=0</div> <div>▽C=0</div>		mm	INCH	DRAWN BY KJOZWIK	DATE 2010/01/14	TITLE BRAD POWER QC 4 POLE TEE W/4 POLE MC DROP				
			4 PLACES	±---	±---	CHECKED BY BWOODMAN	DATE 2010/01/14					
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY		DATE 2010/01/15	molex MOLEX INCORPORATED			
			2 PLACES	±0.13	±.010							
			1 PLACE	±0.25	±.020							
		ANGULAR ±1/2°			MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							