
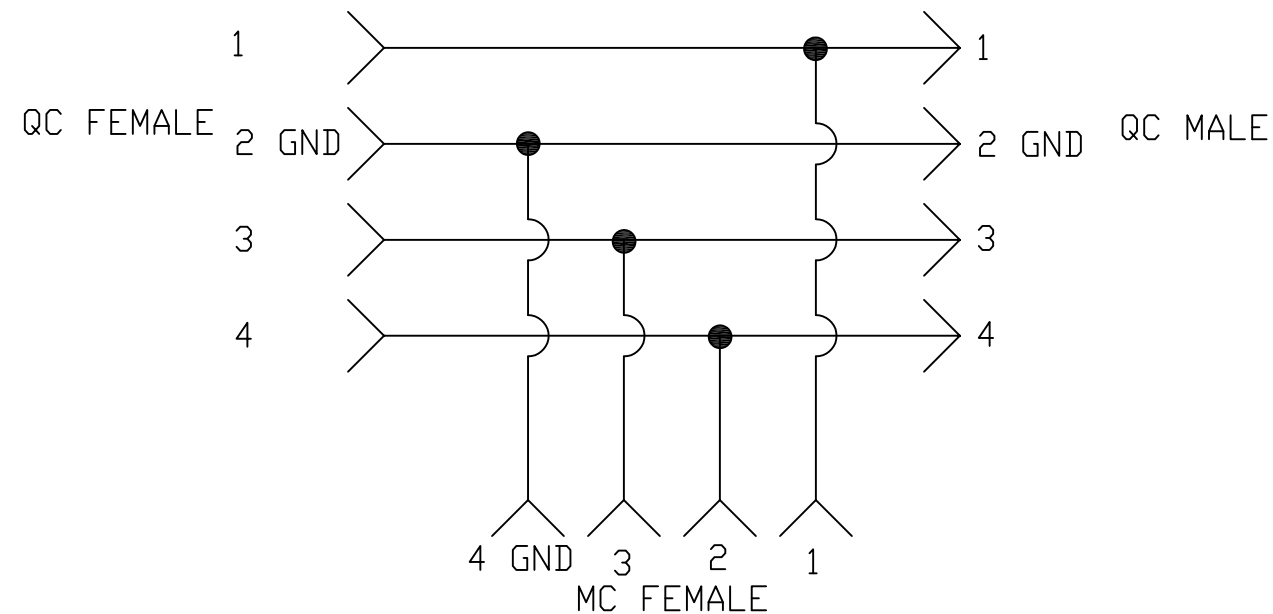
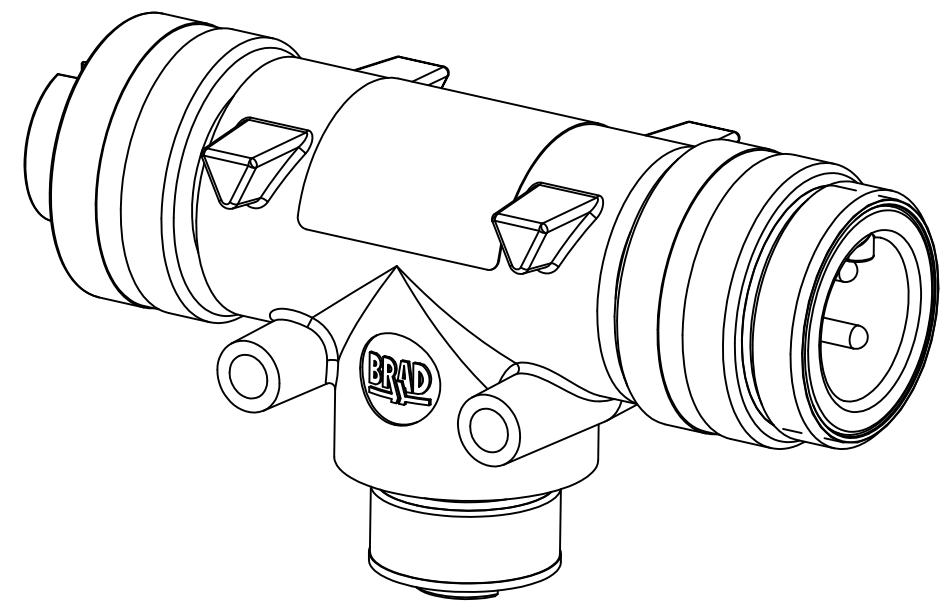
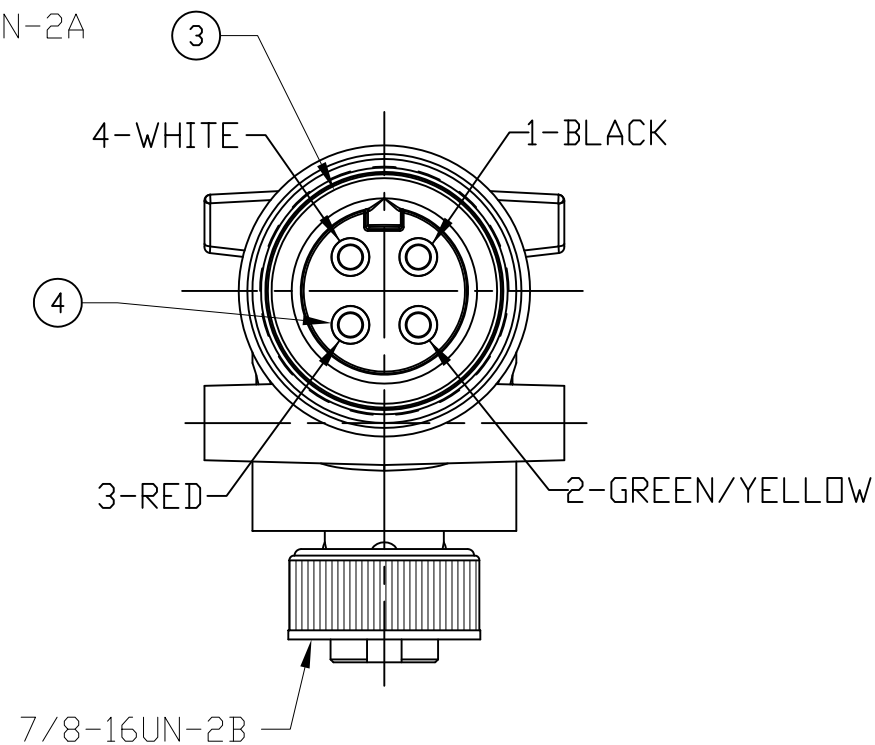
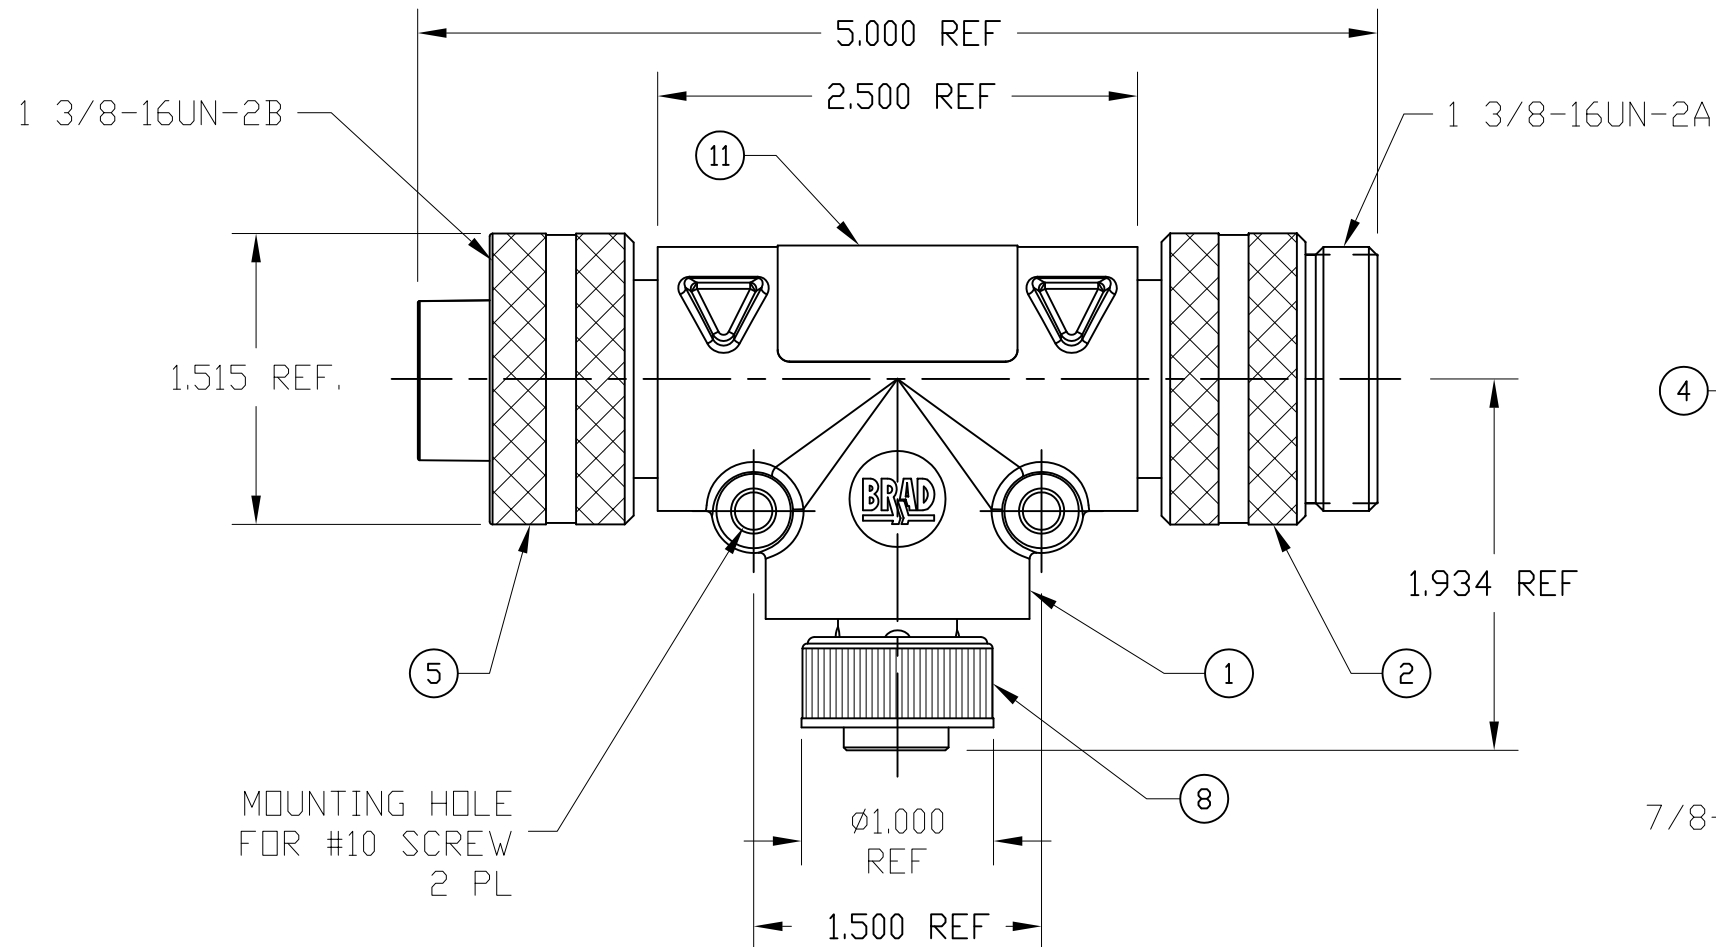


PART NUMBER	ENGINEERING NUMBER
1300680069	TC40140-200

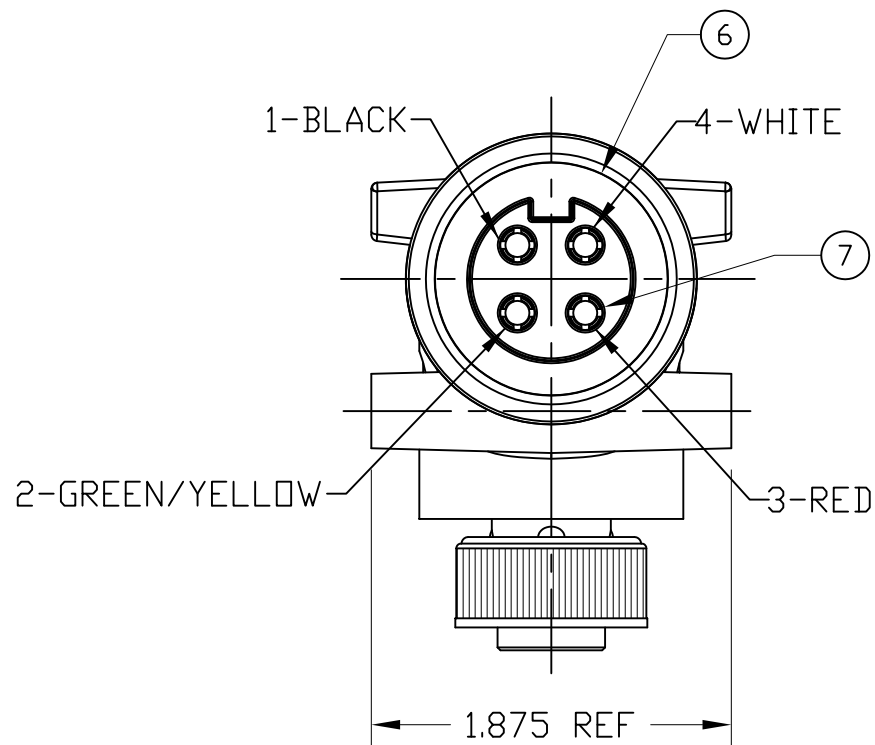

WIRE DIAGRAM

- NOTE:
- 1) LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
 - 2) ELECTRICAL DATA:
REDUCING TEE QC TO MC
POLES: 4
MAX. VOLTAGE: 600V AC/DC
MAX. THRU CURRENT: 25A
MAX. DROP CURRENT: 15A
PROTECTION: IP67
TEMPERATURE RANGE: -20°C TO 90°C
 - 3) PACKAGING:
ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO THE OUTSIDE OF THE BAG.
 - 4) ASSEMBLY IS RoHS COMPLIANT
 - 5) CERTIFICATION:
UL LISTED/CSA CERTIFIED , FILE E258922

11	1	LABEL	PLASTIC FILM	BLACK/YELLOW
10	4	MC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
9	1	MC FEMALE INSERT	PVC	BLACK
8	1	MC COUPLING NUT	ZINC ALLOY	BLACK E-COAT
7	4	QC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	1	QC FEMALE INSERT	PVC	BLACK
5	1	QC FEMALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
4	4	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	1	QC MALE INSERT	PVC	BLACK
2	1	QC MALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
1	1	OVERMOLD	PVC	GRAY
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: WNA2010-0424 DRWN: KJOZWIK 2010/01/14 CHKD: BWOODMAN APPR: JFMURPHY 2010/01/15 A	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY KJOZWIK	DATE 2010/01/14	TITLE BRAD POWER QC 4 POLE TEE W/4 POLE MC DROP					
			4 PLACES	±---	±---	CHECKED BY BWOODMAN	DATE 2010/01/14						
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY		DATE 2010/01/15	molex MOLEX INCORPORATED				
			2 PLACES	±0.13	±.010								
			1 PLACE	±0.25	±.020	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-130068-009	SHEET NO. 1 OF 1				
			ANGULAR ±1/2°			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										