


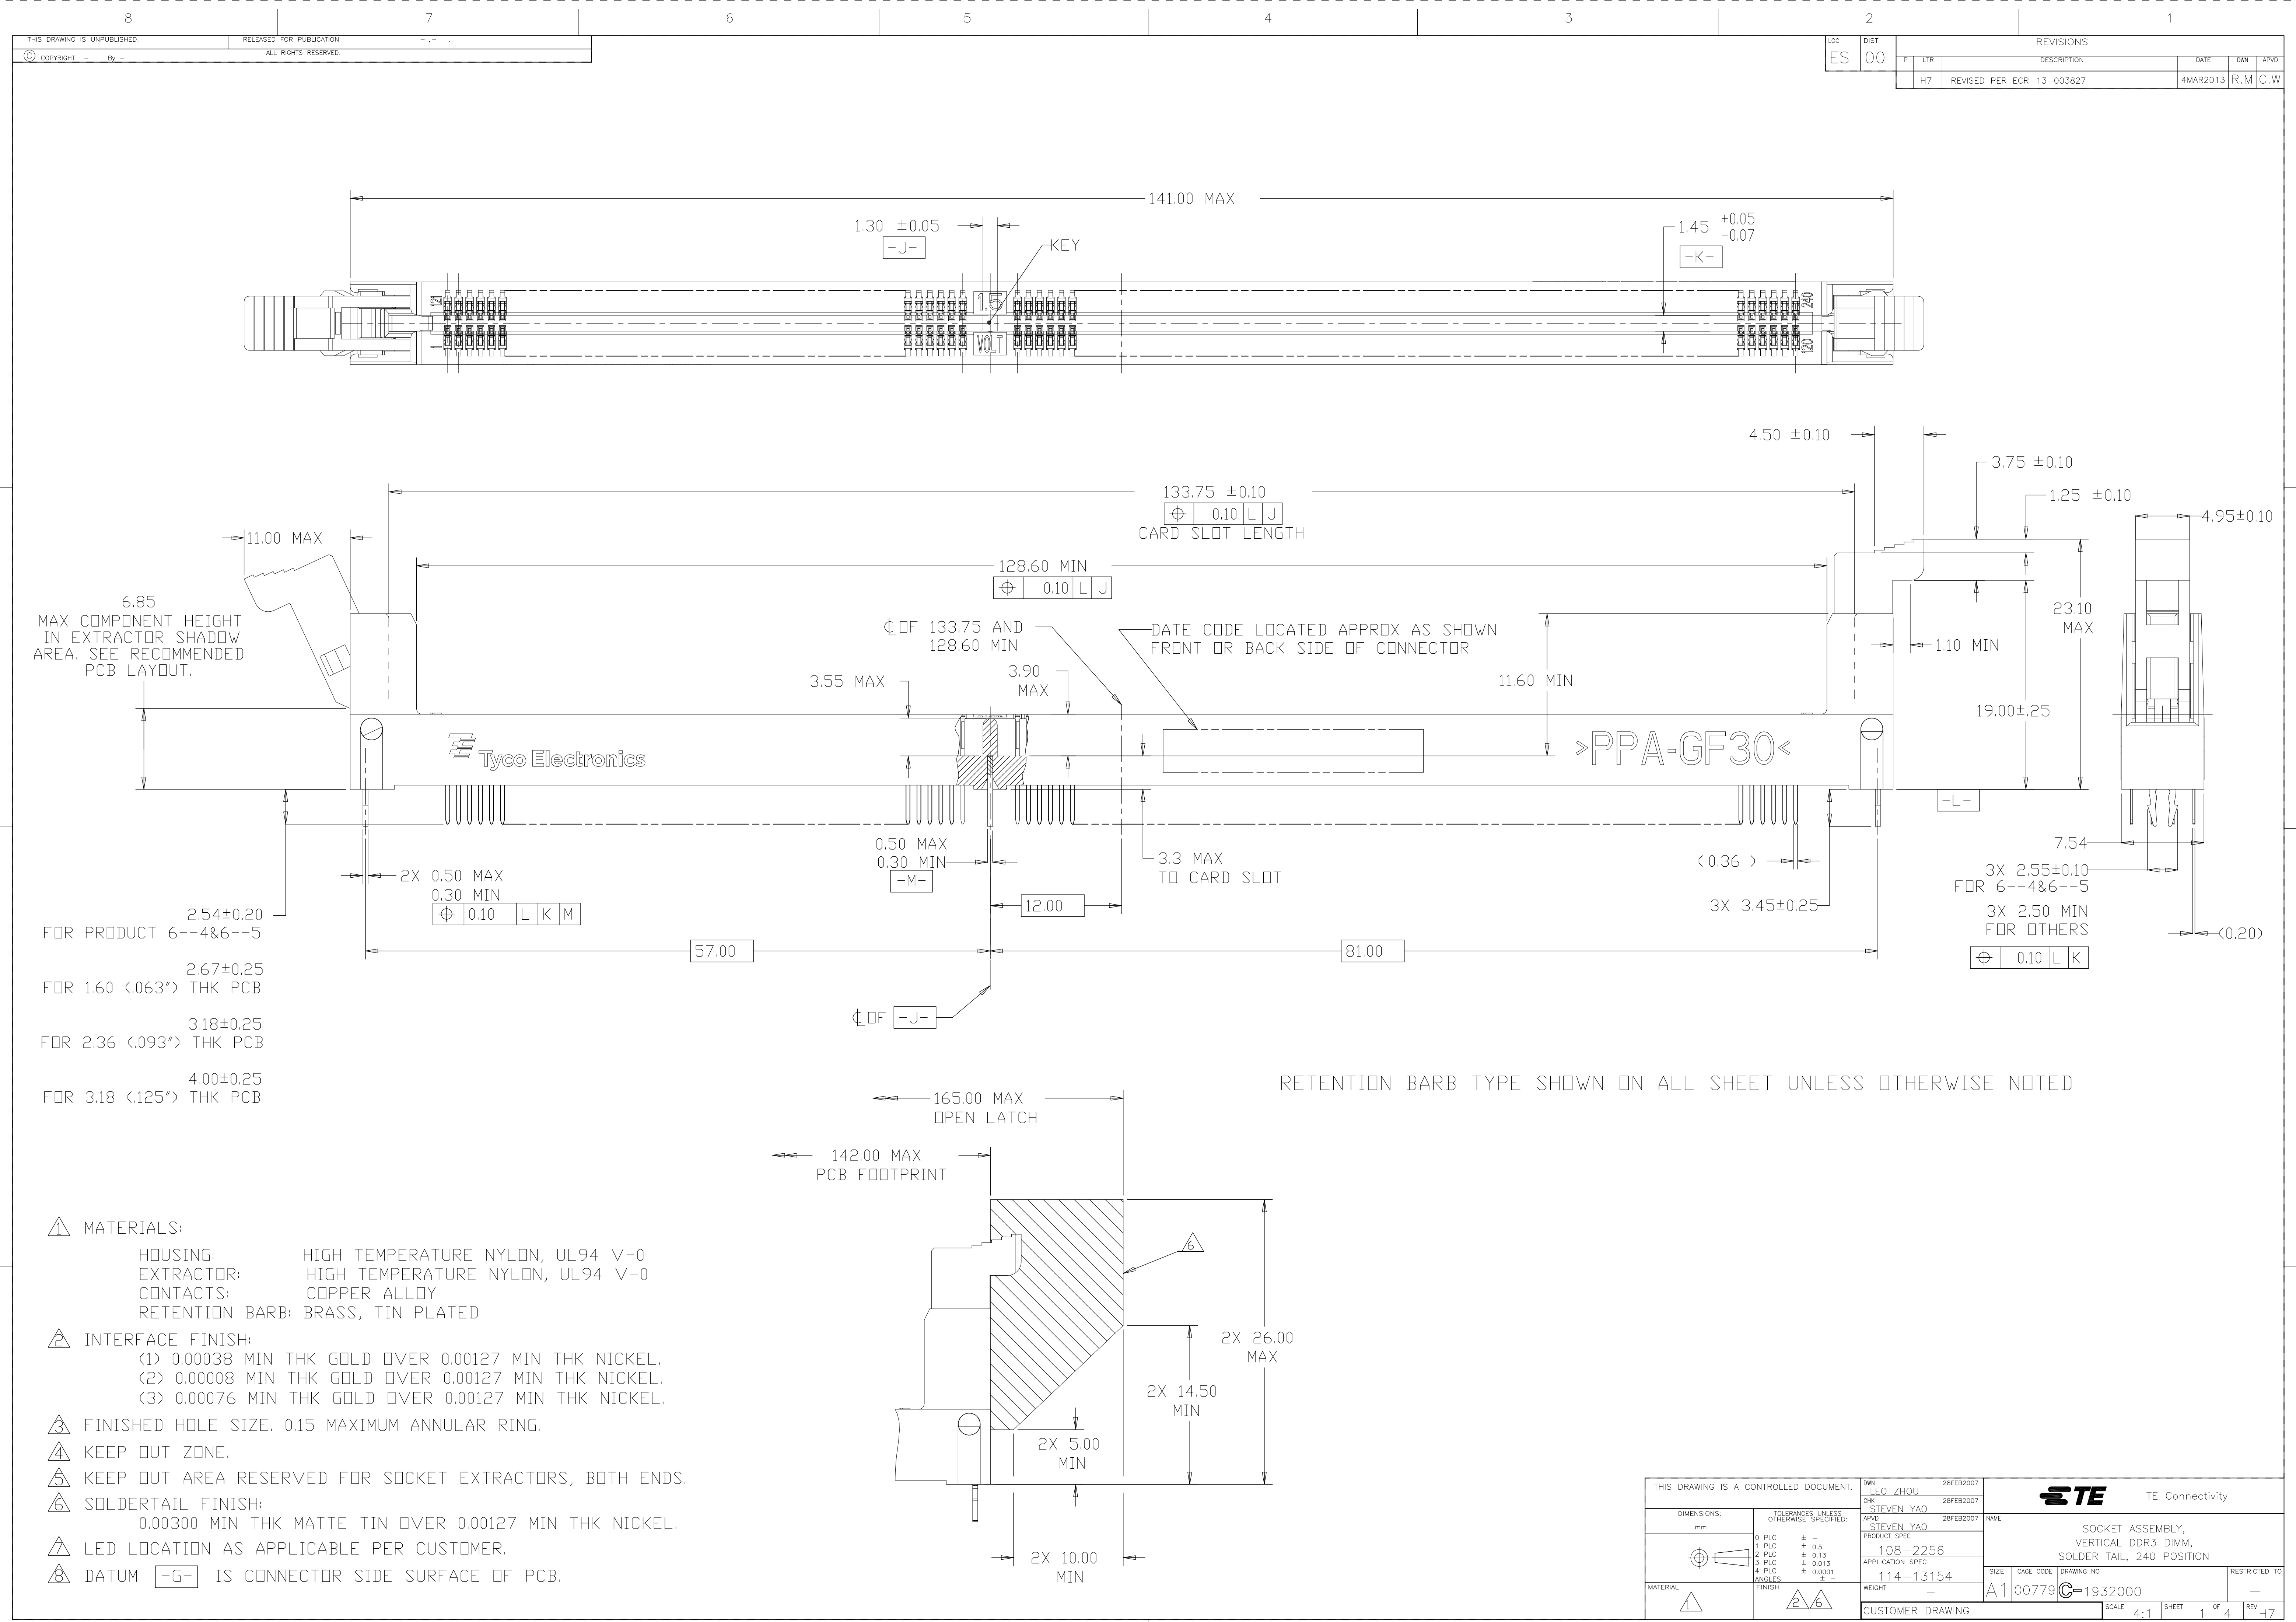

MATERIALS:

HOUSING: HIGH TEMPERATURE NYLON, UL94 V-0
EXTRACTOR: HIGH TEMPERATURE NYLON, UL94 V-0
CONTACTS: COPPER ALLOY
RETENTION BARB: BRASS, TIN PLATED

INTERFACE FINISH:

(1) 0.00038 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(2) 0.00008 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(3) 0.00076 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.

FINISHED HOLE SIZE: 0.15 MAXIMUM ANNULAR RING.

KEEP OUT ZONE.

KEEP OUT AREA RESERVED FOR SOCKET EXTRACTORS, BOTH ENDS.

SOLDERTAIL FINISH:


0.00300 MIN THK MATTE TIN OVER 0.00127 MIN THK NICKEL.

LED LOCATION AS APPLICABLE PER CUSTOMER.


DATUM -G- IS CONNECTOR SIDE SURFACE OF PCB.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LEO ZHOU 28FEB2007	TE TE Connectivity	
DIMENSIONS: mm		CHK STEVEN YAO 28FEB2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEVEN YAO 28FEB2007	NAME	
0 PLC ± -		PRODUCT SPEC	108-2256	
1 PLC ± 0.5		APPLICATION SPEC	114-13154	
2 PLC ± 0.13		SIZE	CAGE CODE	DRAWING NO
3 PLC ± 0.013		114-13154	00779	1932000
4 PLC ± 0.001		WEIGHT	—	—
ANGLES ± -		CUSTOMER DRAWING	SCALE	4:1
FINISH		SHEET	1	OF 4
MATERIAL		REV	H7	

LOC	DIST	REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN
		-	-	SEE SHEET 1	-	-

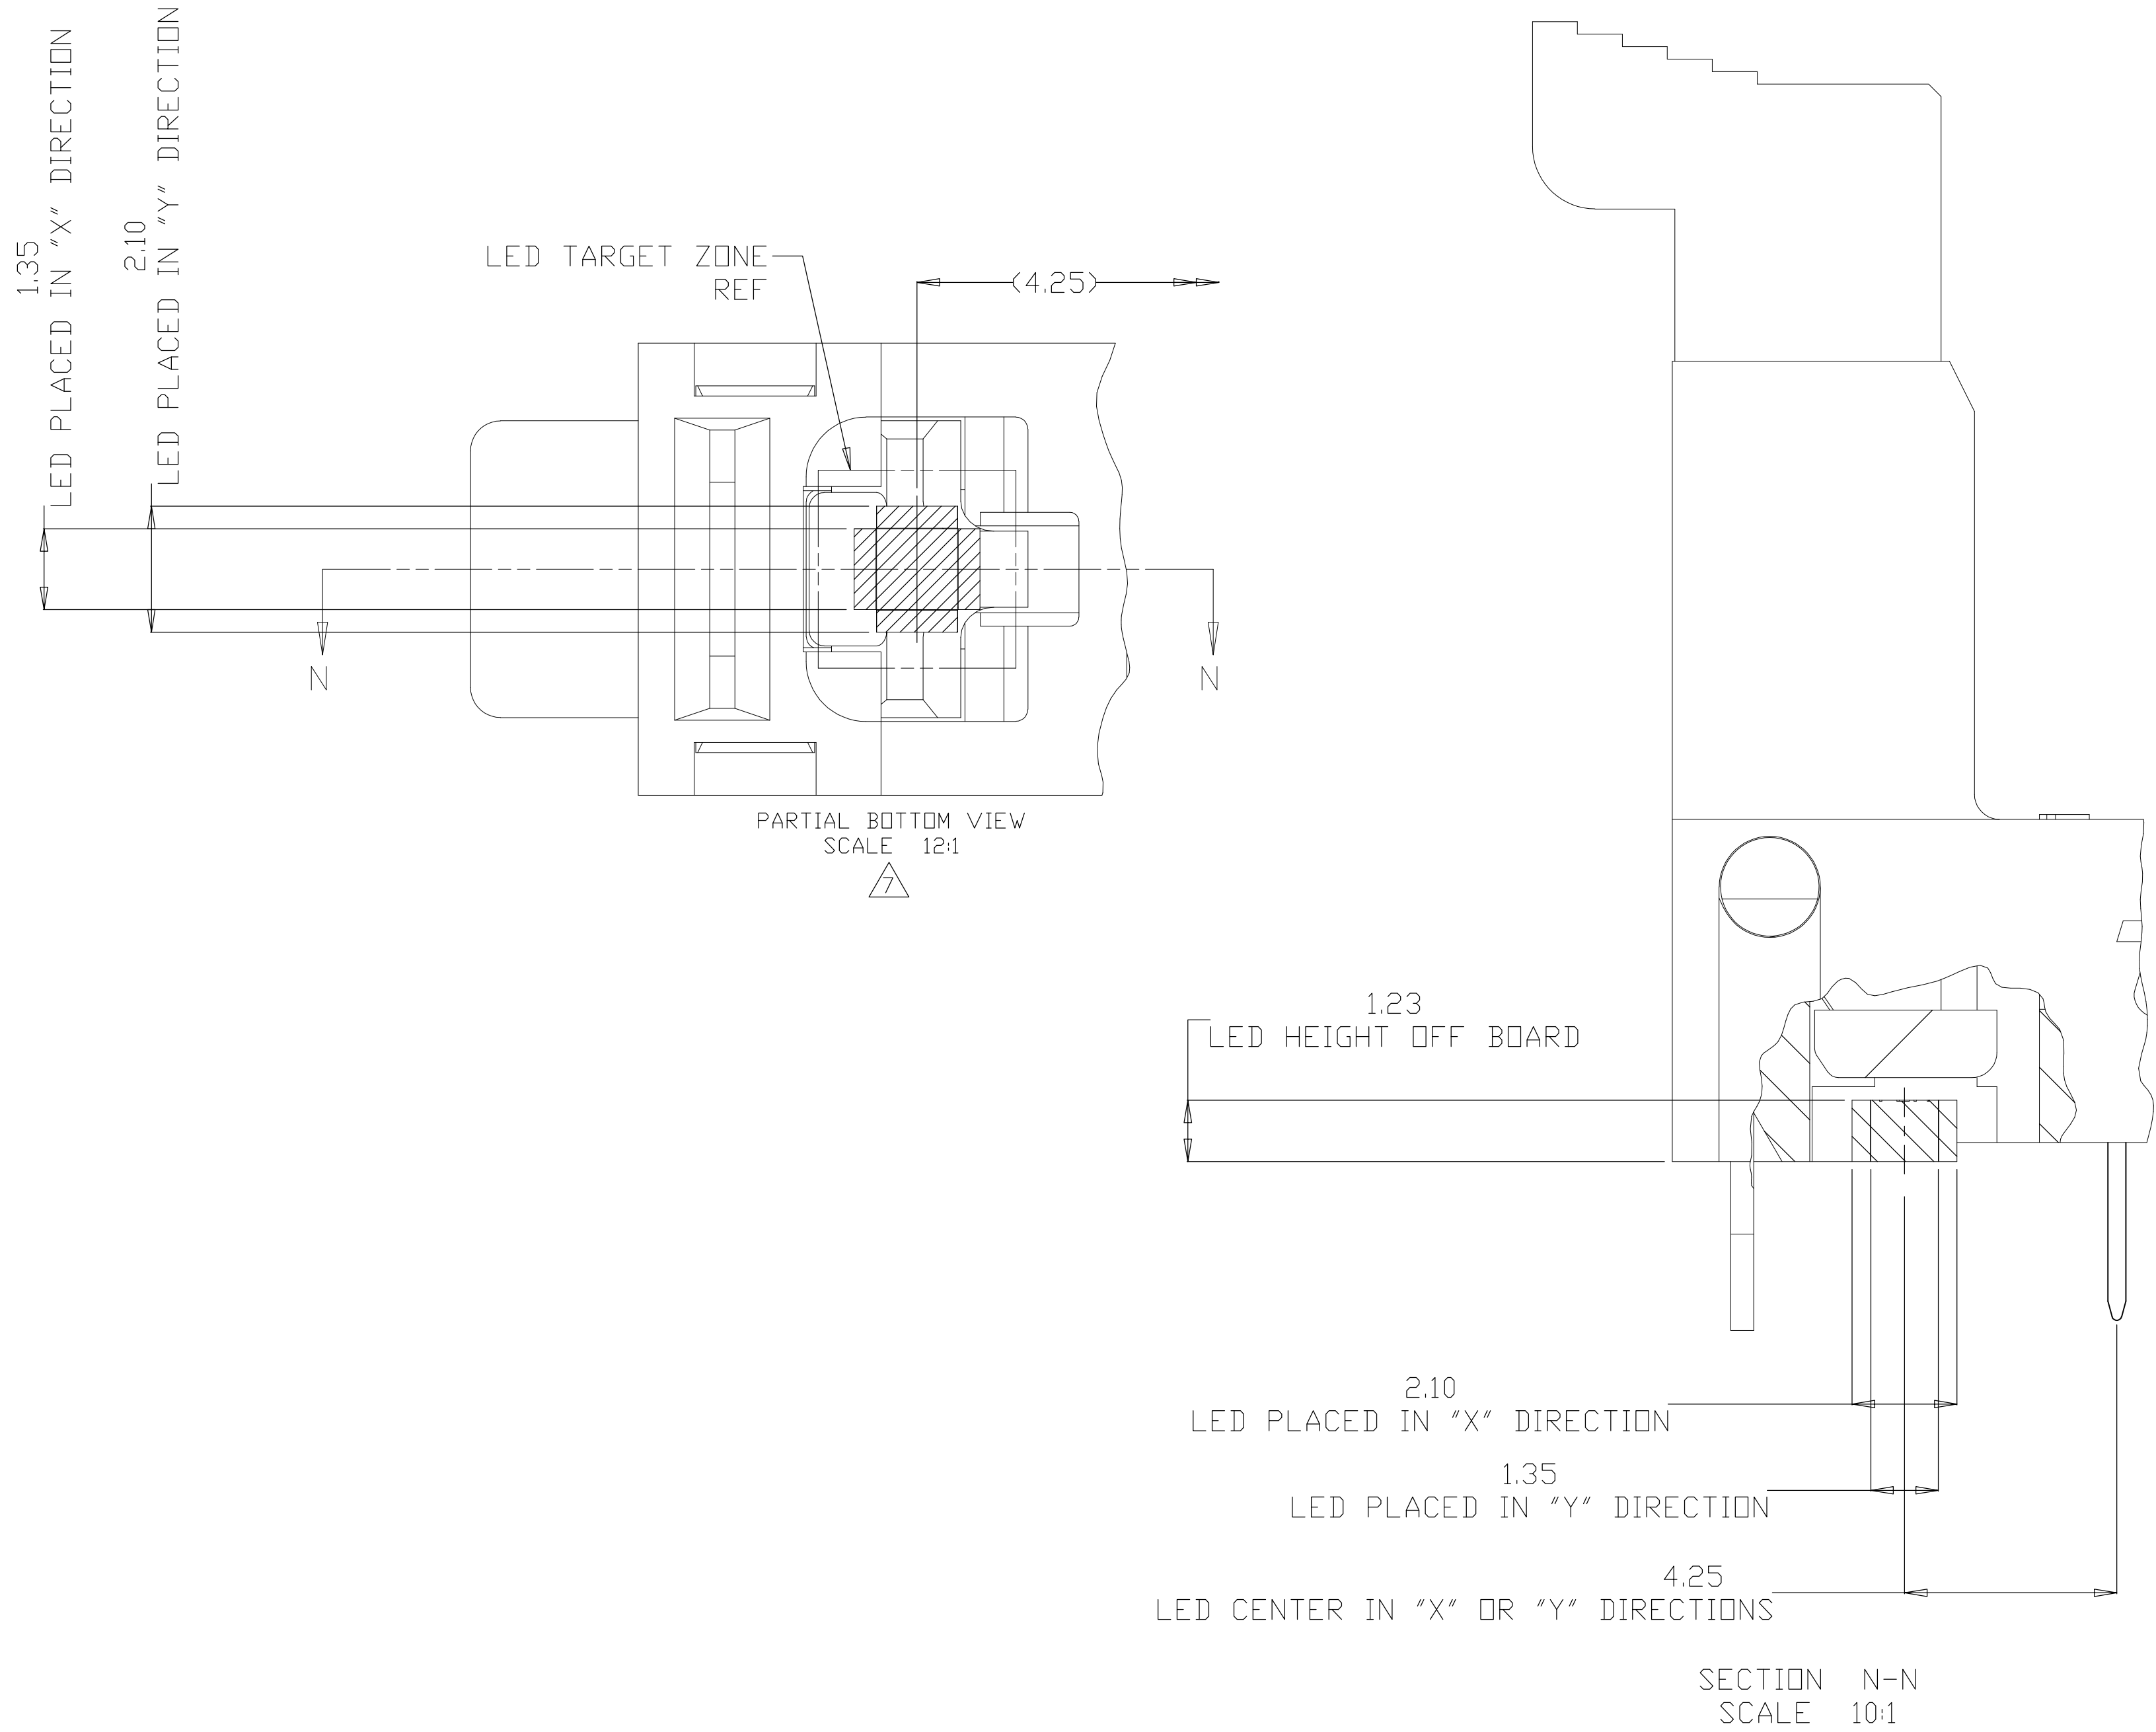

RETENTION BARB	BLACK	BLACK	0.00076 MIN (30u'')	2.54	7-1932000-6
	NATURAL			2.54	7-1932000-5
	NATURAL	BLUE<2935U>	0.00038 MIN<15u''>	2.67	7-1932000-2
	NATURAL	PINK<701C>	0.00008 MIN (3u'', FLASH)	2.54	6-1932000-5
		BLUE<284C>		2.54	6-1932000-4
	BLACK	BLACK	0.00076 MIN (30u'')	4.00	5-1932000-2
	NATURAL	BLACK		3.18	5-1932000-1
				4.00	4-1932000-8
				3.18	4-1932000-7
	NATURAL	GREEN<368C> BLUE<284C> ORANGE<021C>	0.00038 MIN (15u'')	2.67	4-1932000-6
				2.67	3-1932000-3
				2.67	2-1932000-5
	BLACK	BLACK	0.00038 MIN (15u'')	2.67	2-1932000-1
				3.18	1-1932000-7
			0.00008 MIN<3u''>	2.67	1-1932000-6
	4.00	1-1932000-5			
	NATURAL	BLACK	0.00038 MIN (15u'')	3.18	1-1932000-1
			0.00008 MIN<3u''>	2.67	1-1932000-0
				2.67	1932000-7
	NATURAL	NATURAL	0.00038 MIN (15u'')	4.00	1932000-6
				3.18	1932000-5
				2.67	1932000-4
			0.00008 MIN (3u'', FLASH)	4.00	1932000-3
3.18				1932000-2	
2.67				1932000-1	
HOUSING STYLE	EXTRACTOR COLOR	HOUSING COLOR	CONTACT GOLD INTERFACE	TAIL LENGTH	PART NUMBER

HOUSING STYLE	EXTRACTOR COLOR	HOUSING COLOR	CONTACT GOLD INTERFACE	TAIL LENGTH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN LEO ZHOU 28FEB2007	 TE Connectivity	
DIMENSIONS: mm			CHK STEVEN YAO 28FEB2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD STEVEN YAO 28FEB2007	NAME SOCKET ASSEMBLY, VERTICAL DDR3 DIMM, SOLDER TAIL, 240 POSITION	
			PRODUCT SPEC —		
0. PLC ± —			APPLICATION SPEC —	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1. PLC ± 0.5			WEIGHT —		
2. PLC ± 0.13			A1 00779  1932000		
3. PLC ± 0.013					
4. PLC ± 0.0001			CUSTOMER DRAWING		
ANGLES ± —					
MATERIAL —			SCALE 4:1 SHEET 2 OF 4 REV H7		
FINISH —					

