

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1700716013](#)
Status: **Active**
Overview: [High-Speed Pluggable I/O Solutions](#)
Description: zSFP+™ Stacked Ganged Assembly with Elastomeric Gasket, 2-by-6 with Outer Down/Up Light Pipes, 240 Circuits

Documents:
[3D Model](#) [Application Specification AS-170071-0002 \(PDF\)](#)
[Drawing \(PDF\)](#) [Test Summary TS-170071-0001 \(PDF\)](#)
[Application Specification AS-170071-0001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E29179

General


Product Family I/O Connectors
Series [170071](#)
Application Module-to-Board
Component Type Receptacle
Electrical Model Yes
Overview [High-Speed Pluggable I/O Solutions](#)
Product Name zSFP+™
Type N/A
UPC 884982402348

Physical

Circuits (Loaded) 240
Color - Resin Black
Durability (mating cycles max) 100
Flammability 94V-0
Gender Female
Lock to Mating Part Yes
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Matte Tin
Material - Resin High Temperature Thermoplastic
Net Weight 141.556/g
Number of Rows 2
Orientation Right Angle
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 2.36mm
Packaging Type Tray
Panel Mount No
Pitch - Mating Interface 0.80mm
Pitch - Termination Interface 0.80mm
Plating min - Mating 0.762µm
Plating min - Termination 0.762µm
Polarized to Mating Part Yes
Polarized to PCB Yes
Ports 12
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40°C to +85°C
Termination Interface: Style Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact 0.5A

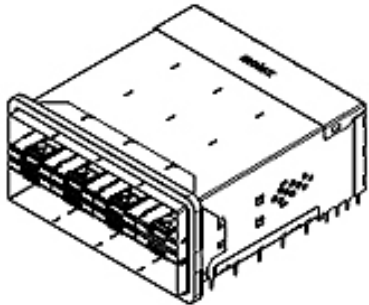

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

[170071](#) Series

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Stacked Multi-Port Extraction Tool, 2 by 6	0622029950
2-by-6 SFP Stacked Multi-Port Insertion Tool	0622030155

Shield Type	N/A
Shielded	Yes
Voltage - Maximum	30V AC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-170071-0001, AS-170071-0002
Electrical Model Document	EE-170071-0001
S-Parameter Model	SP-170071-0001
Sales Drawing	SD-170071-0002
Symbol/Footprint Data	SYM-170071-0001
Test Summary	TS-170071-0001

This document was generated on 07/29/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION