
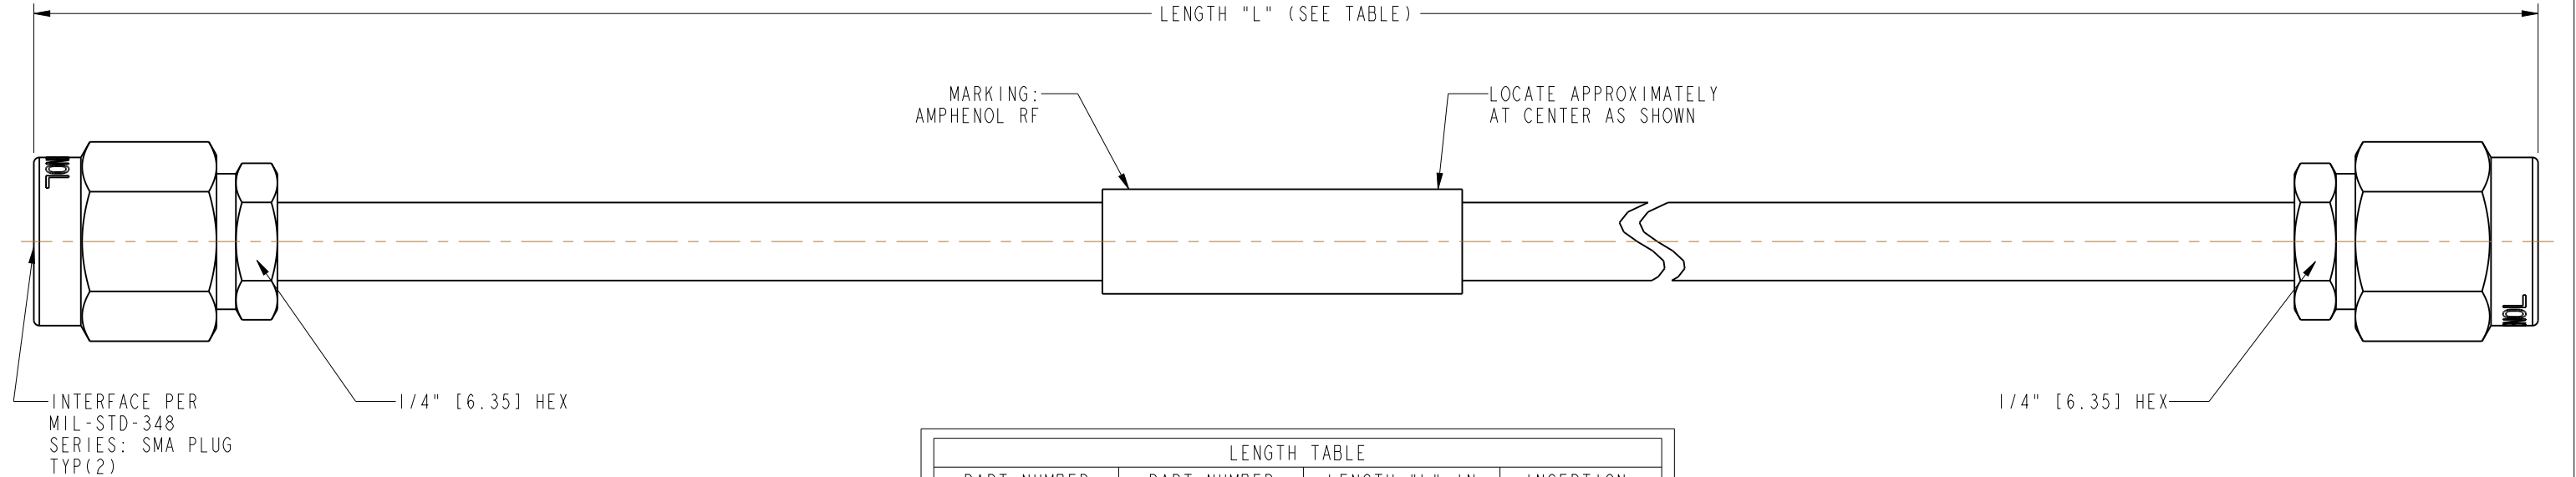


NOTES: 1. MATERIALS AND FINISHES: SMA STR PLUG - STAINLESS STEEL, GOLD PLATING CABLE - 0.141 CONFORMABLE	THIRD ANGLE PROJ. 	REVISIONS				
		REV	DESCRIPTION	DATE	ECO	APPR
		A	RELEASE TO MFG	11/16/15	50824	VK
		B	ADDED PNS FOR 3, 4, AND 5 IN LENGTHS	12/18/15	50911	JN

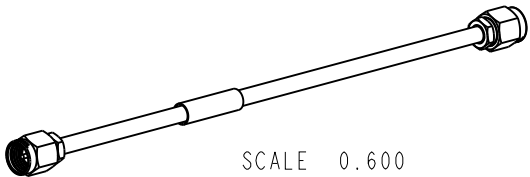

LENGTH TABLE			
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH "L" IN INCHES [METERS]	INSERTION LOSS MAX (dB)
95-902-450-003	-	3.00 [0.076]	0.30
95-902-450-004	-	4.00 [0.102]	0.35
95-902-450-005	-	5.00 [0.127]	0.40
95-902-450-006	-	6.00 [0.152]	0.45
95-902-450-007	-	7.00 [0.178]	0.50
95-902-450-008	-	8.00 [0.203]	0.55
95-902-450-009	-	9.00 [0.229]	0.60
-	95-902-450M025	9.84 [0.250]	0.65
95-902-450-010	-	10.00 [0.254]	0.70
95-902-450-012	-	12.00 [0.305]	0.80
95-902-450-018	-	18.00 [0.457]	1.15
-	95-902-450M050	19.69 [0.500]	1.20
95-902-450-024	-	24.00 [0.610]	1.45
95-902-450-036	-	36.00 [0.914]	2.15
-	95-902-450M100	39.37 [1.000]	2.30

DESIGN REQUIREMENTS:			
☒ FREQUENCY : DC TO 18 GHz	☒ CONTINUITY		
☒ VSWR : 1.650 MAX.	☒ HI-POT: 500 VRMS		
☒ INS. LOSS : SEE TABLE	☐ OTHER		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN J. NERI ENGINEER CLEMENT	DATE 02-Dec-15 DATE 15-Oct-15	TITLE SMA STR PLUG TO SMA STR PLUG, WITH ANTI-TORQUE BODY USING 0.141 CONFORMABLE CABLE, VARIOUS LENGTHS		Amphenol RF www.amphenolrf.com	
	REFERENCE EAR # 6826 CONFIGURATION LEVEL: In Work	APPROVED K. CAPOZZI CAD FILE	DATE 12/18/15	SCALE: 3.5:1.0 SHEET 2 OF 2		DRAWING NO.95-902-450-XXX	
				DWG SIZE B		ITEM NO.95-902-450-XXX	
				REV B		PART NO.95-902-450-XXX	