
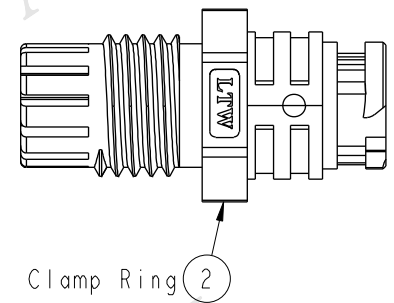
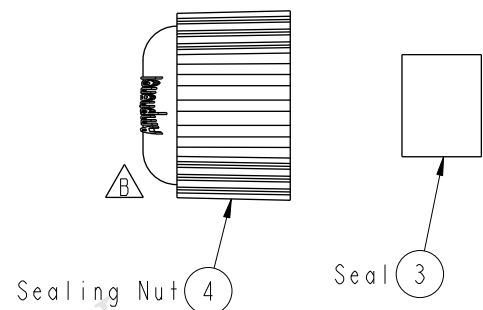


Pin Assignments

Front View

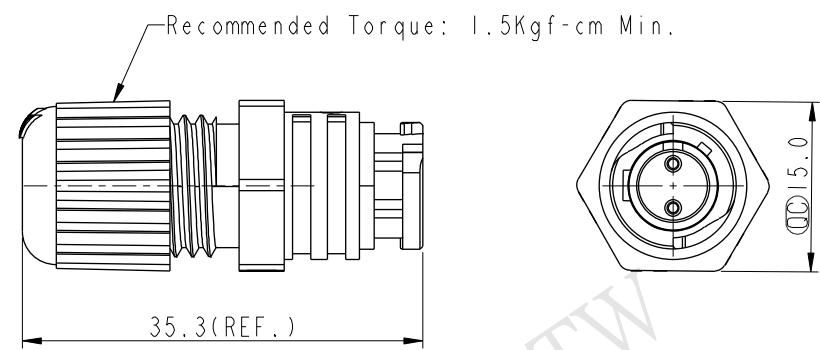

Note:

- * QC Important Dimension To Check.
- * Waterproof Rate: IP67.
- * Female Pin: Copper Alloy, Gold Plated.
- * Housing: Nylon, UL 94V-0, Black.
- * Seal: Silicone, UL 94V-0, Gray.
- * Clamp Ring: Nylon, UL 94V-2, Black.
- * Sealing Nut: Nylon, UL 94V-2, Black.
- * Seal for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$.
- * Operating Voltage Max: AC 300 V Rms.
- * Operating Current Max: 5A.
- * One Set Unassembled In One Bag.

UNIT:mm			TITLE ASSY,PUSH LOCK,2PIN M CONN F PIN		Amphenol LTW		ITEM NO PLD-02BMFA-QL7001	DRAWN BY Vicky	DATE 2015-01-08
TOLERANCE $\pm 0.5 \text{ mm}$			SCALE 3:2	SIZE A4	SHEET 1 OF 1	安費諾亮泰企業股份有限公司	DWG NO PLD-02BMFA-QL7001	CHECKED BY Sam	DATE 2015-01-08
			REV. B	WC-REV. A.2	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Rita	DATE 2015-01-08
1	2	3	4	5	6	7	8	FWI10702-01-02A1	