


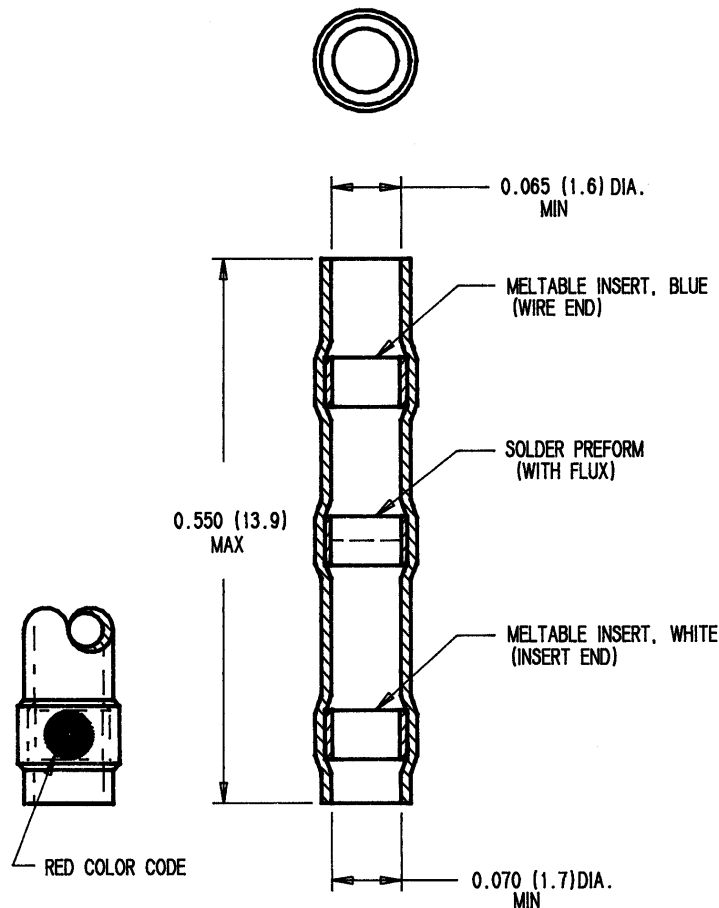

← **FIGURE 1**


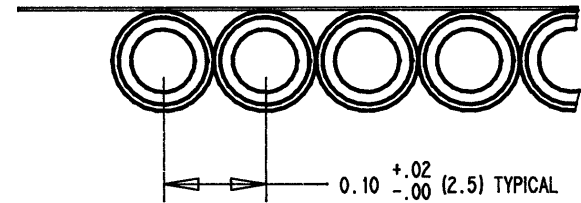


FIGURE 2 →

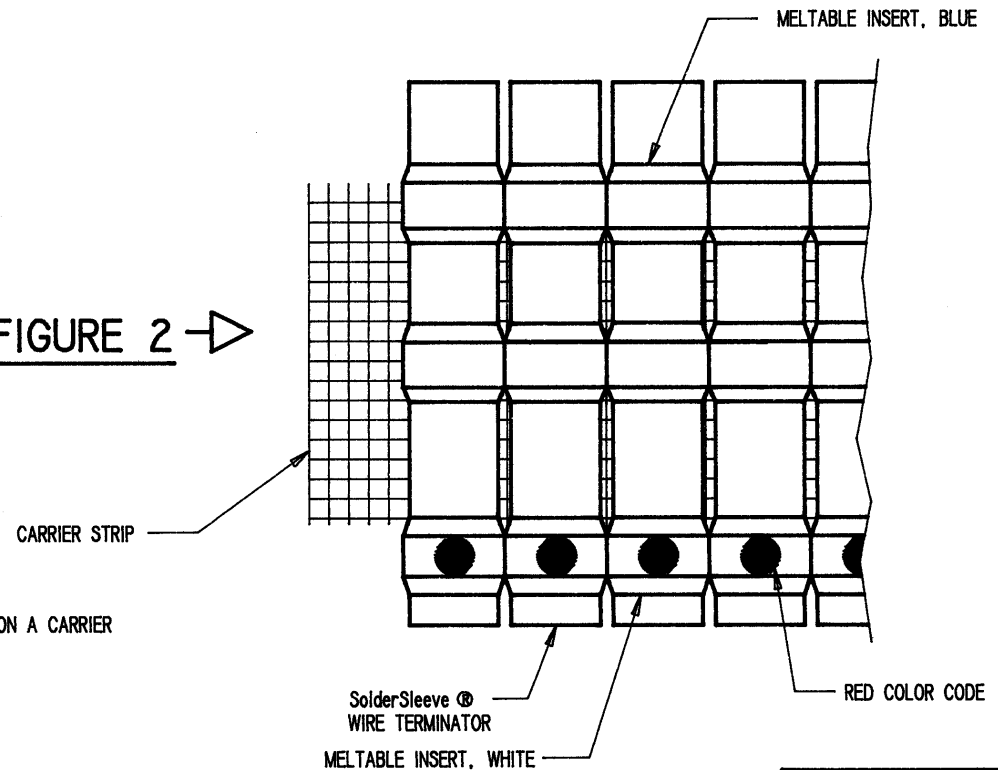

5. CTA-0099 IS SUPPLIED ON A CARRIER STRIP PER FIG. 2. STANDARD PACKAGING QUANTITY IS 1000 PIECES ON A CARRIER STRIP. OTHER QUANTITIES SUPPLIED PER SPECIFICATION.
4. WEIGHT (MAX): 0.00013 LBS. [0.06 GR.] (INDIVIDUAL PIECE).
3. CONFIGURATION CONTROL PER ES 71001 APPLIES.
2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 22 GAGE TIN OR SILVER PLATED CONDUCTORS TO TERMINALS OF A **Raychem** MTC100 SERIES INSERT.

1. MATERIAL:
 - A. INSULATION SLEEVE: HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
 - B. SOLDER PREFORM: SOLDER TYPE: Sn63
FLUX TYPE: RA
PER QQ-S-571
 - C. MELTABLE INSERTS: LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC.

NOTES: If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED PER ECN #T-6562	5-22-86	93

SPECIFICATION CONTROL DRAWING

©Raychem Corporation 1986
V.L.G.LCTA\0099SCD.DRW

Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025			PRE-PRODUCTION	
DRAWN <i>LUTTEN</i> 4-30-86 CHECKED <i>J.B.</i> 5-1-86 APPROVED <i>J.B.</i> 5-1-86 APPROVED <i>J.C.</i> 5-1-86	TITLE SolderSleeve® WIRE TERMINATOR FOR 20-22 GAGE WIRE SIZE TEMPERATURE RATING 125° C MTC100 SERIES			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN PARENTHESES			SIZE C CODE IDENT. NO. 06090	DWG. NO. CTA-0099 WEIGHT SHEET 1 OF 1
DO NOT SCALE THIS DRAWING				

(CONFIGURATION CONTROL)