

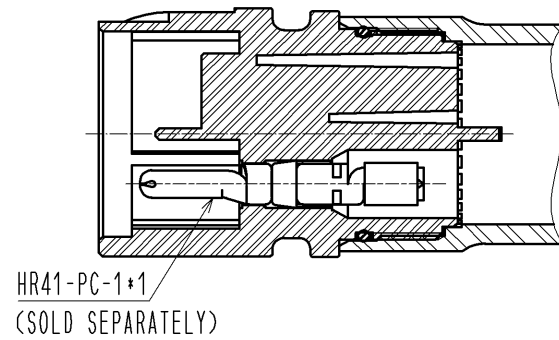



1 Fig.1 THE STATE INCORPORATE
APPLICABLE CRIMP CONTACT.

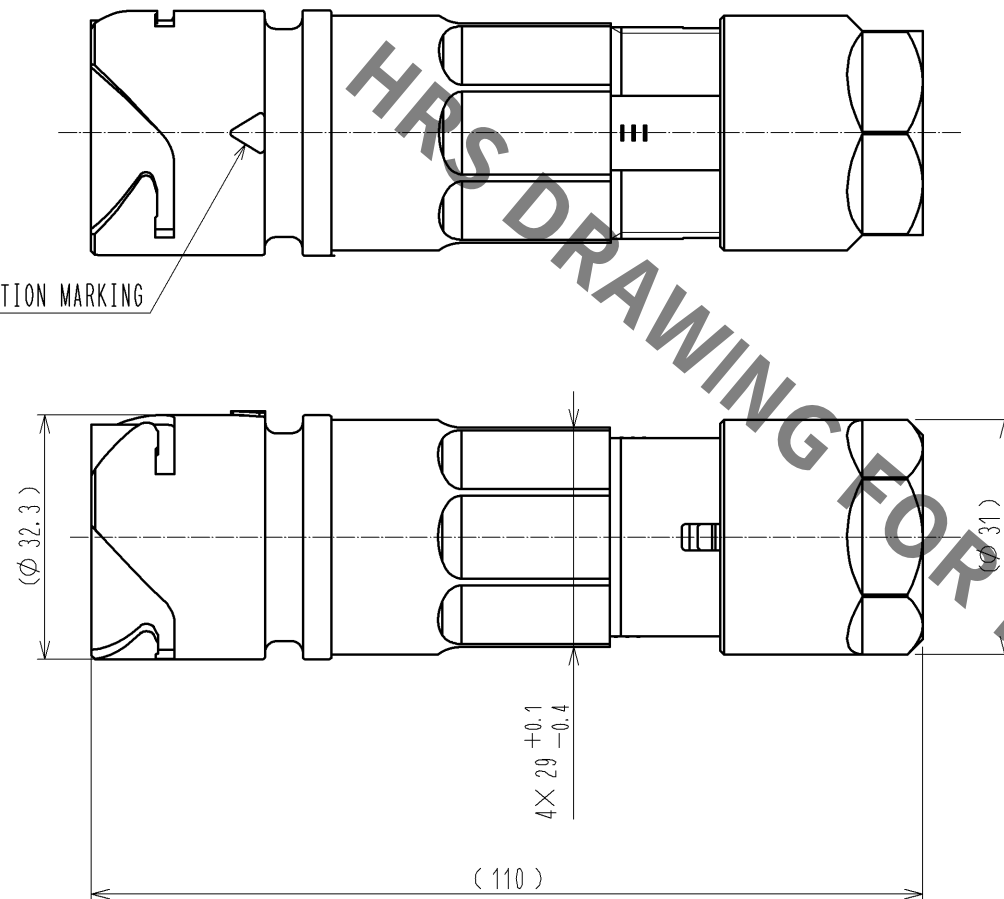


MAIN GUIDE POSITION MARKING



A-A

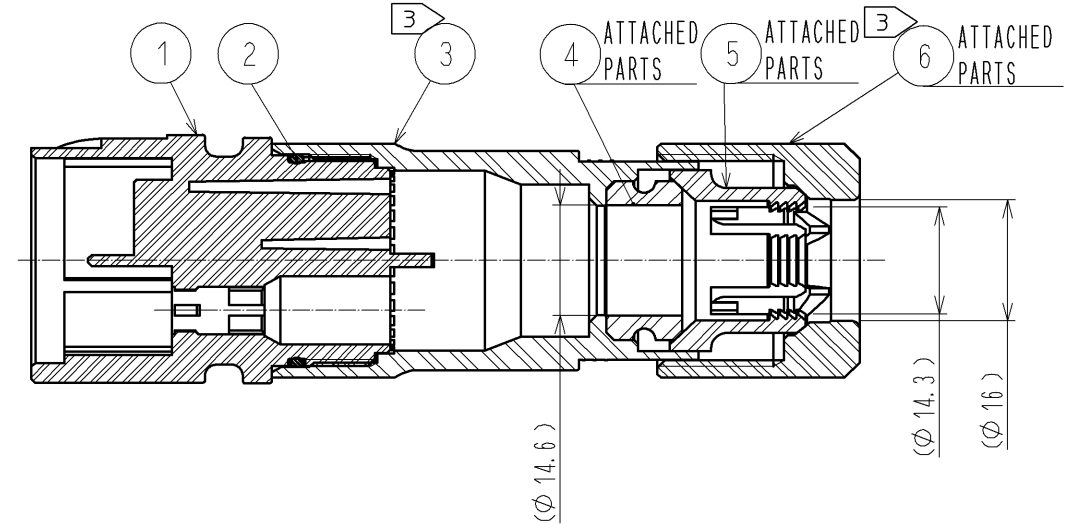

5 Fig.2 THE APPEARANCE AFTER ASSEMBLY.

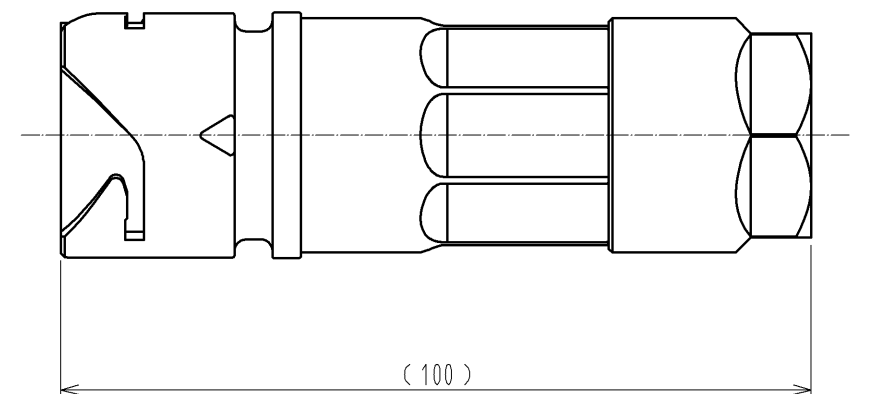

- NOTES
- Fig.1 SHOWS THE STATE INCORPORATE APPLICABLE CRIMP CONTACT.
APPLICABLE CRIMP CONTACT : HR41-PC-1*1(SOLD SEPARATELY)
 - APPLICABLE CRIMP CONTACT EXTRACTION TOOL : HR41-TP
 - THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ③ AND ⑥ TO BE 5 TO 5.5N·m
THE ADHESIVE TOR PREVENTION OF LOOSENESS IS NOT NECESSARY IN THE FIRST TIME.
LOCTITE 263, LOCPRIMER 7649, HENKEL JAPAN IS RECOMMENDED TO PREVENT REF. NO. ①, ③ FROM LOOSING. AFTER THE SECOND TIME.
 - ROTATION EXAMPLES ARE SHOWN FOR REF.NO. ①, ③ AND ⑥.
 - Fig.2 SHOWS THE APPEARANCE AFTER ASSEMBLY.
 - CABLE PULL FORCE, TWISTING STRENGTH, WATER TIGHTNESS AND OTHER CHARACTERISTICS MAY DIFFER DEPENDING ON CABLE SPECIFICATIONS AND STRUCTURE.
PLEASE EVALUATE UNDER THE ACTUAL CONDITIONS PRIOR TO USE.
 - THE ASSEMBLY OF THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0298.

3	POLYAMIDE	(BLACK) UL94V-0	6	POLYAMIDE	(BLACK) UL94V-0
2	SILICONE RUBBER	(RED)	5	POLYAMIDE	(NC, WHITE) UL94V-0
1	POLYAMIDE	(BLACK) UL94V-0	4	SILICONE RUBBER	(NC, WHITE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 1 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
		APPROVED : SU. OBARA	13. 05. 16	DRAWING NO.	EDC3-118000-00
		CHECKED : HY. KOBAYASHI	13. 05. 15	PART NO.	HR41-25WBJF-3PC
		DESIGNED : TY. SUZUKI	13. 05. 14	CODE NO.	CL141-0019-2-00
		DRAWN : TY. SUZUKI	13. 05. 14		