



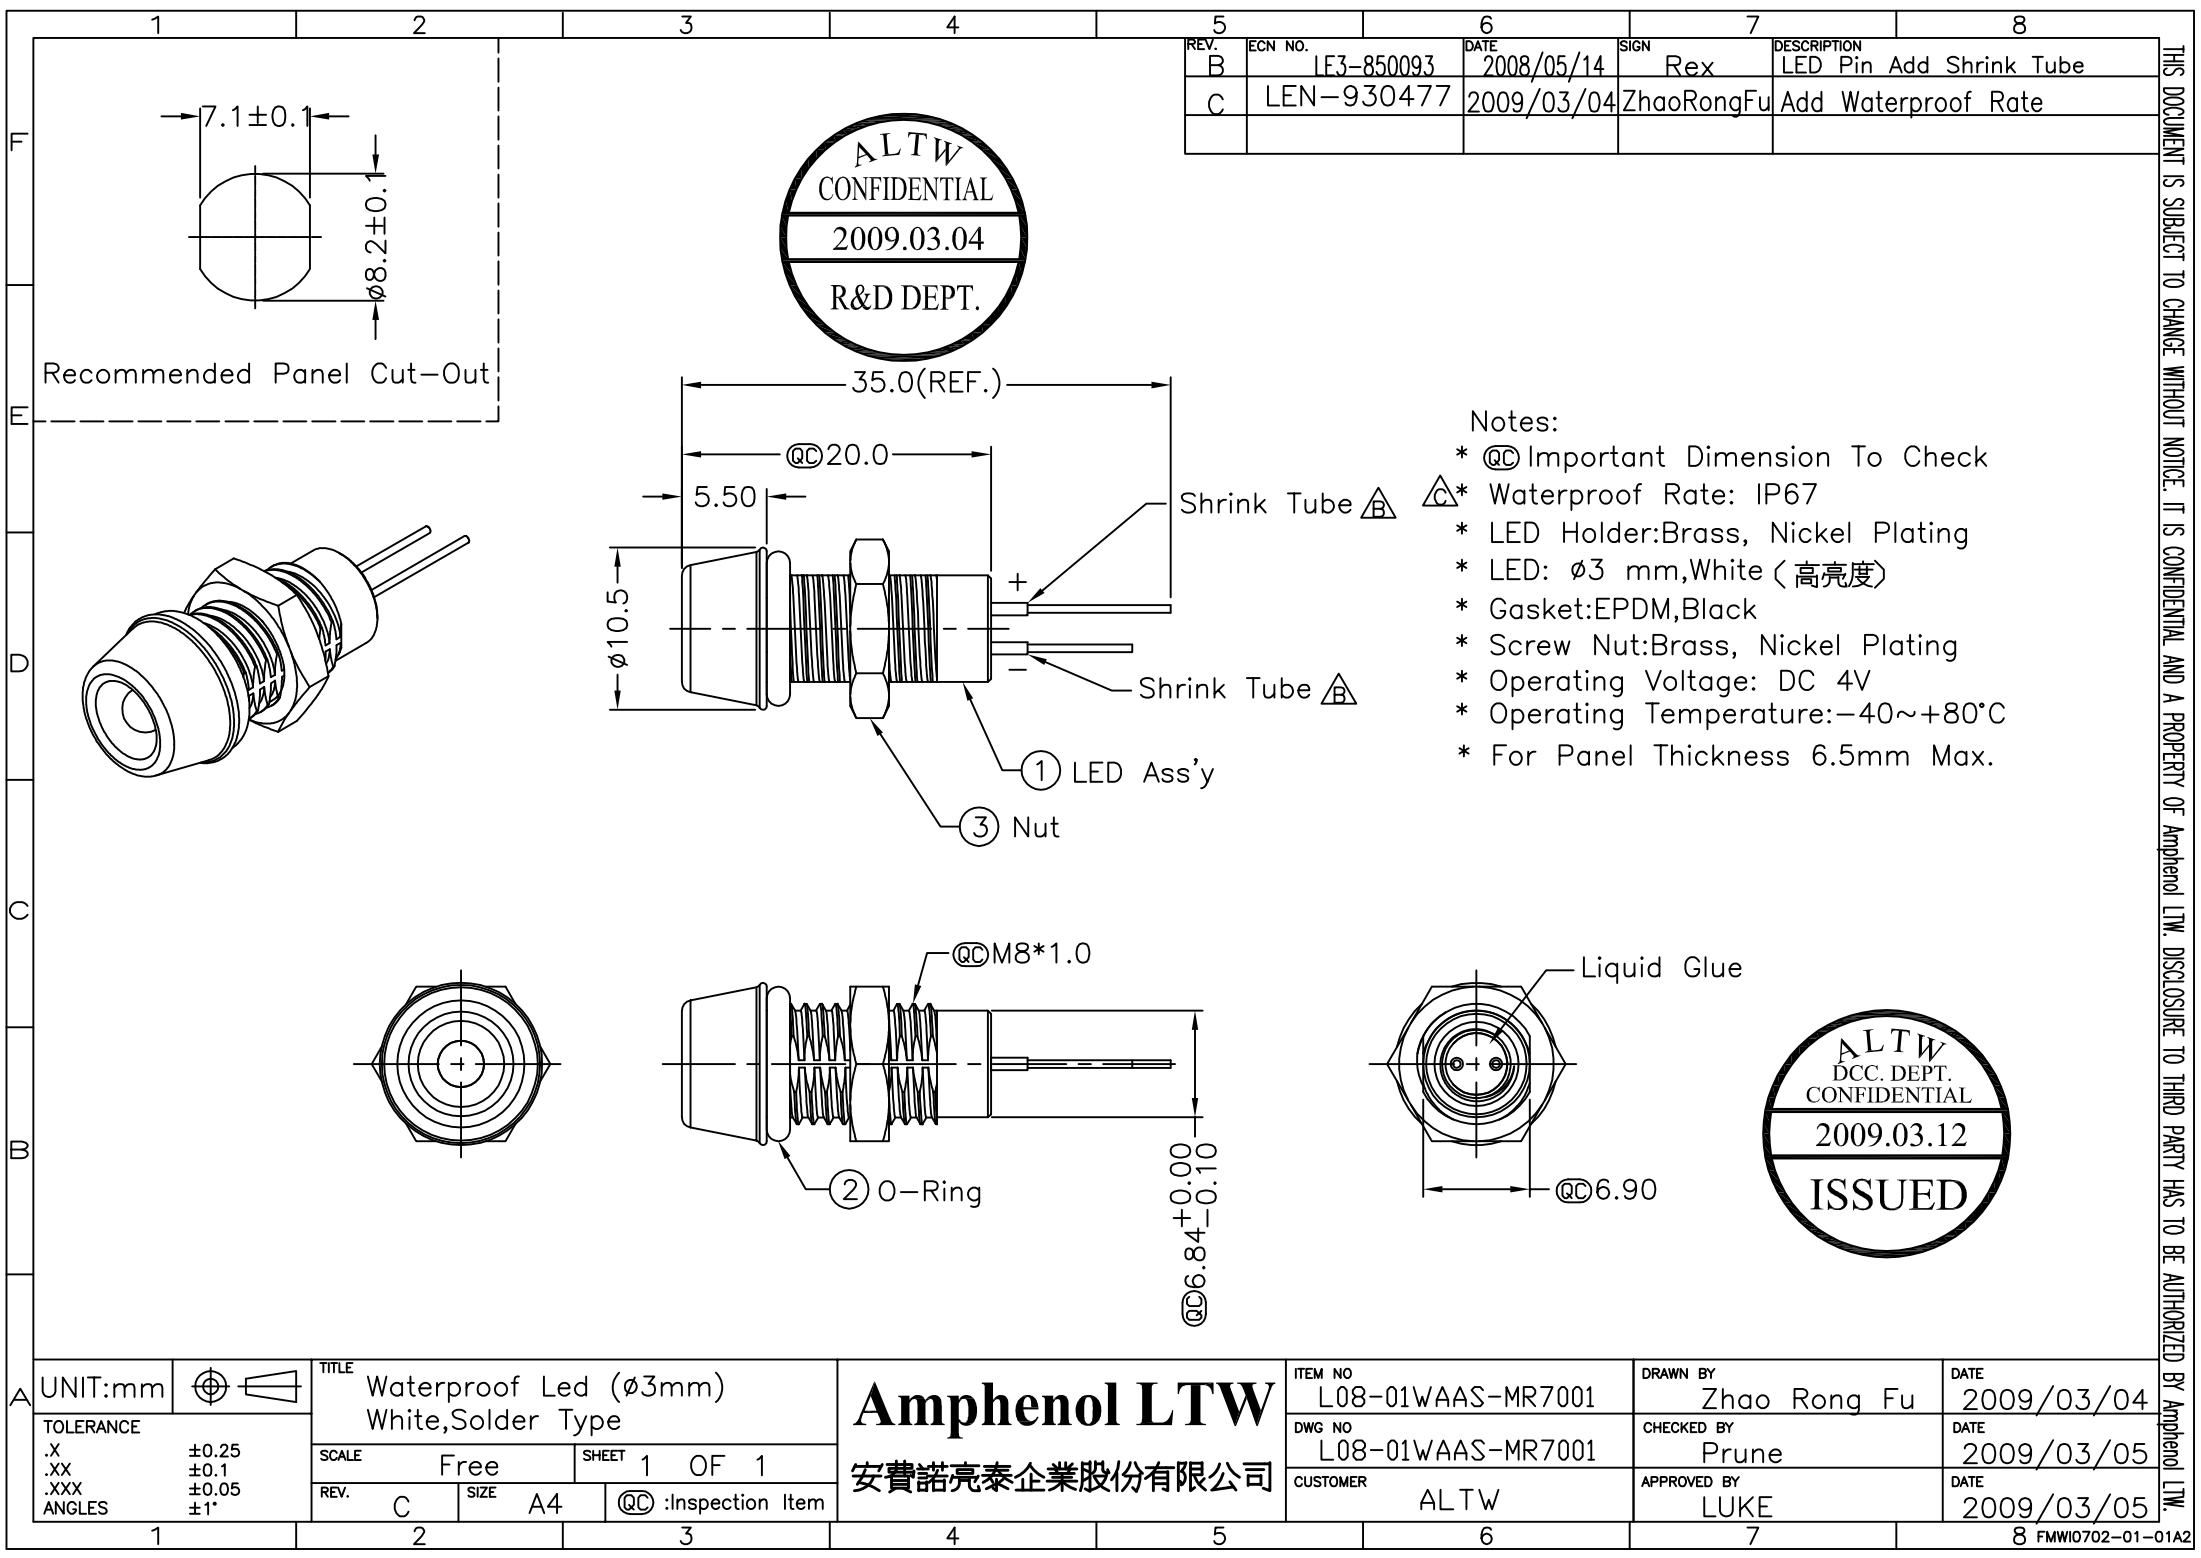

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LF3-850093	2008/05/14	Rex	LED Pin Add Shrink Tube
C	LEN-930477	2009/03/04	ZhaoRongFu	Add Waterproof Rate

- Notes:
- * $\textcircled{C}$ Important Dimension To Check
 - * $\triangle$ Waterproof Rate: IP67
 - * LED Holder: Brass, Nickel Plating
 - * LED: $\phi 3$ mm, White (高亮度)
 - * Gasket: EPDM, Black
 - * Screw Nut: Brass, Nickel Plating
 - * Operating Voltage: DC 4V
 - * Operating Temperature: $-40\sim+80^{\circ}\text{C}$
 - * For Panel Thickness 6.5mm Max.



UNIT:mm		TITLE Waterproof Led ($\phi 3\text{mm}$) White, Solder Type		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO L08-01WAAS-MR7001	DRAWN BY Zhao Rong Fu	DATE 2009/03/04
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^{\circ}$		SCALE Free	SHEET 1 OF 1			DWG NO L08-01WAAS-MR7001	CHECKED BY Prune	DATE 2009/03/05
REV. C		SIZE A4	$\textcircled{C}$: Inspection Item		CUSTOMER ALTW		APPROVED BY LUKE	DATE 2009/03/05