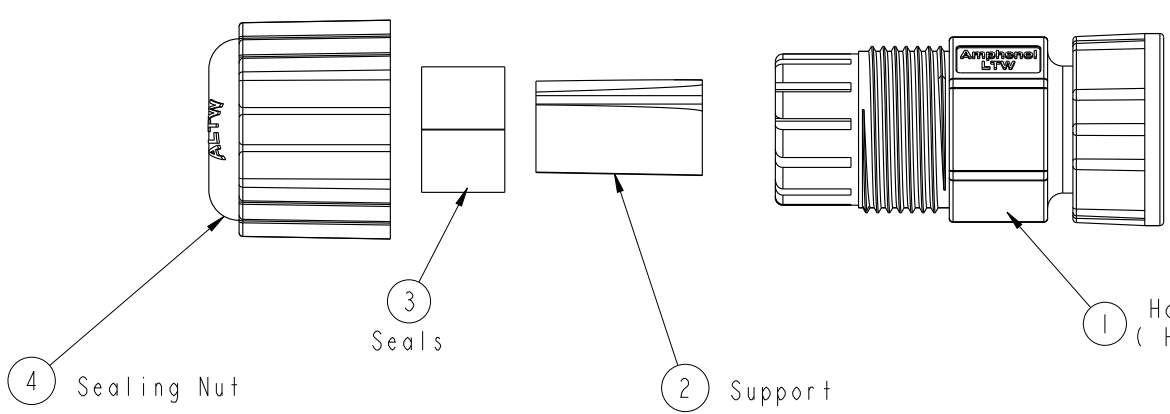
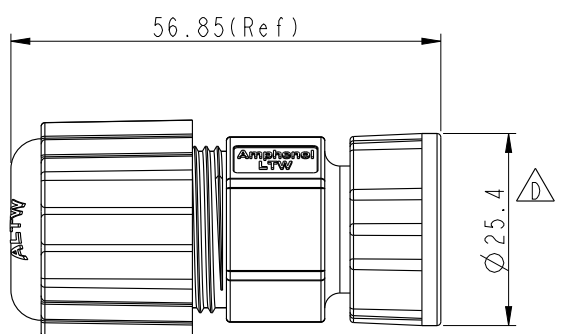



	1	2	3	4	5	6	7	8	
F					REV.	ECN NO.	DATE	SIGN	DESCRIPTION
					B	LEN1420098	2014-02-21	Yulong-wang	Change Screw Nut To Lock Nut; Remove the Pulg & Change the Note
					C	LE31490140	2014-09-01	Joyy	Change to 94V0 material
					D	LEN1570168	2015-06-19	Tom	Change Tolerance
E					ALTW CONFIDENTIAL 2015-06-19 R&D DEPT.				
D					ALTW DCC. DEPT. CONFIDENTIAL 2015.08.06 ISSUED				
C					Note: *  Important Dimension * Waterproof Rate : IP67 (Mated) *  Housing : Nylon66, Black * Gasket : Silicone, Gray * Screw Nut : Nylon+GF, Black *  Support: PVC, Black * Sealing Nut: Nylon+GF, Black * Seals: Silicone, Gray. * Cable OD Range: 5.0~6.5mm * Mating Nut Torsion Value Range: 5~8kgf-cm * Sealing Nut Torsion Value Range: 8~15kgf-cm * One Set Unassembled in One PE Bag.				
B									
A									

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

UNIT:mm			TITLE RJ45 FEED-THRU,13/16"-28,CSIZE			ITEM NO RCP-00BMMS-SLM7001	DRAWN BY Tom	DATE 2015-06-19
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°			SCALE 1:1	SIZE A4	SHEET 1 OF 1	DWG NO RCP-00BMMS-SLM7001	CHECKED BY Jiazhen	DATE 2015-06-19
			REV. D	WC-REV. A.19	 :Inspection item	CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-06-19

Amphenol LTW
安費諾亮泰企業股份有限公司