

P	LTR	DESCRIPTION	DATE	DWN	APVD
	BI	REVISED PER ECO-16-004800	12SEP2016	NK	MZ

D

D

C




C

B

B

A

A

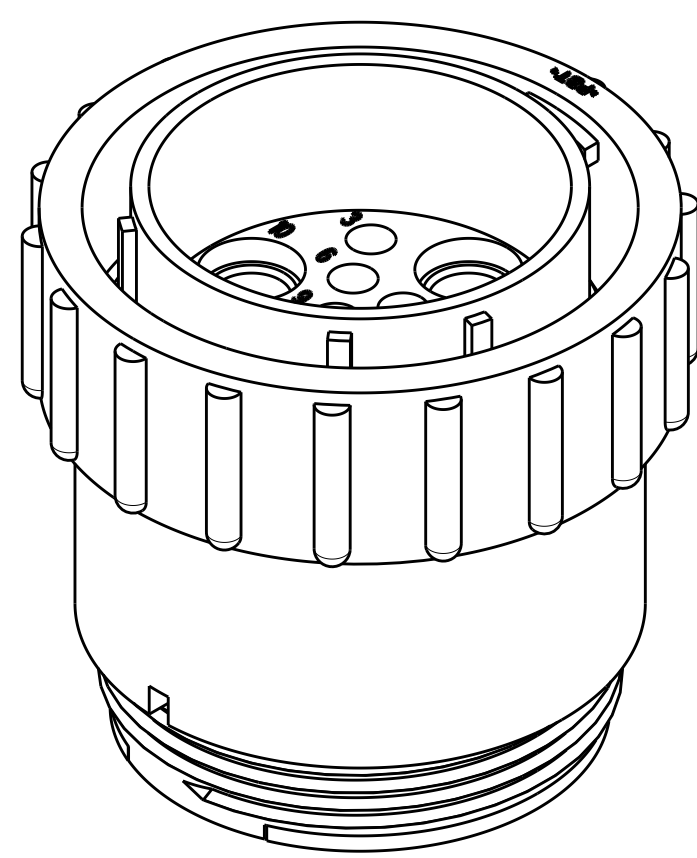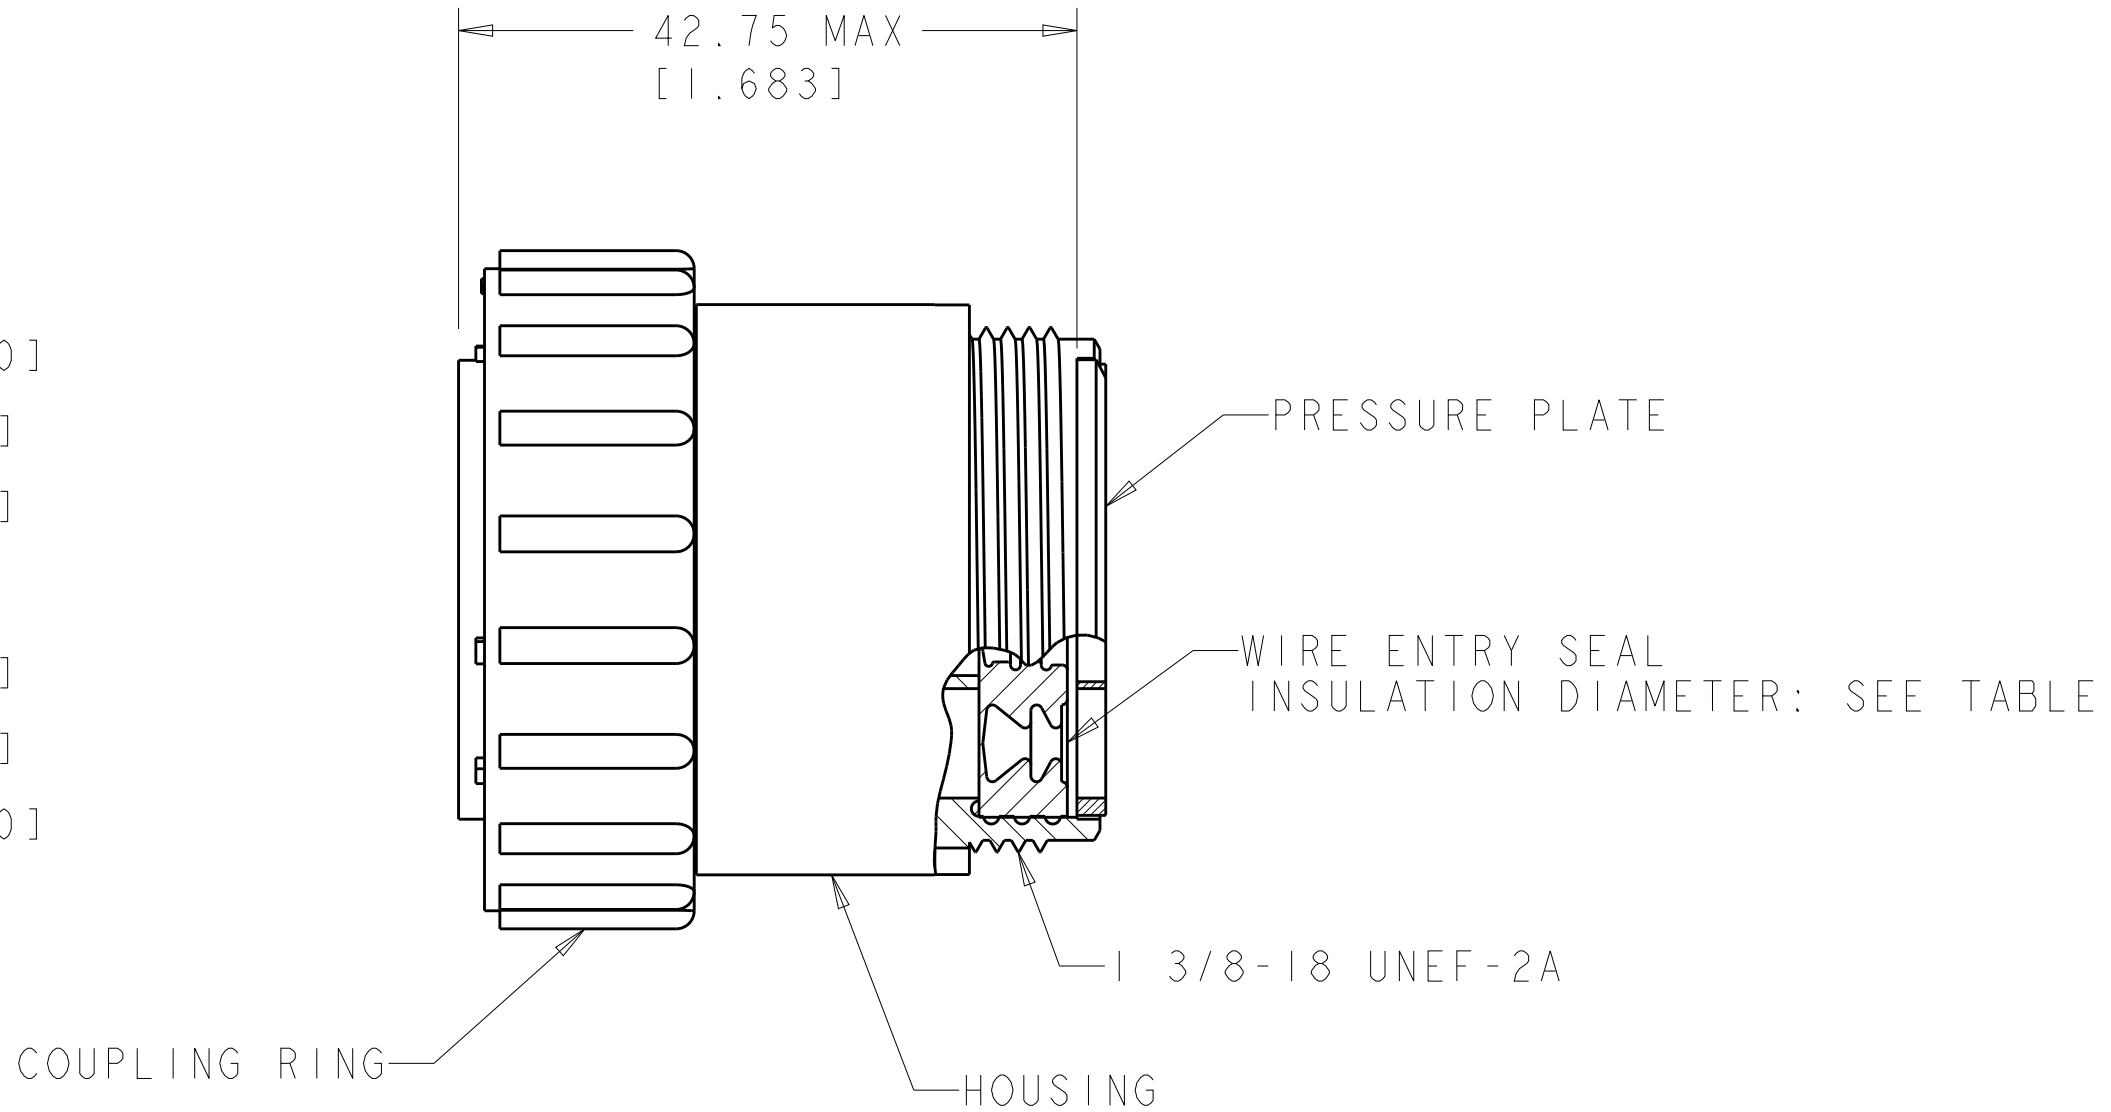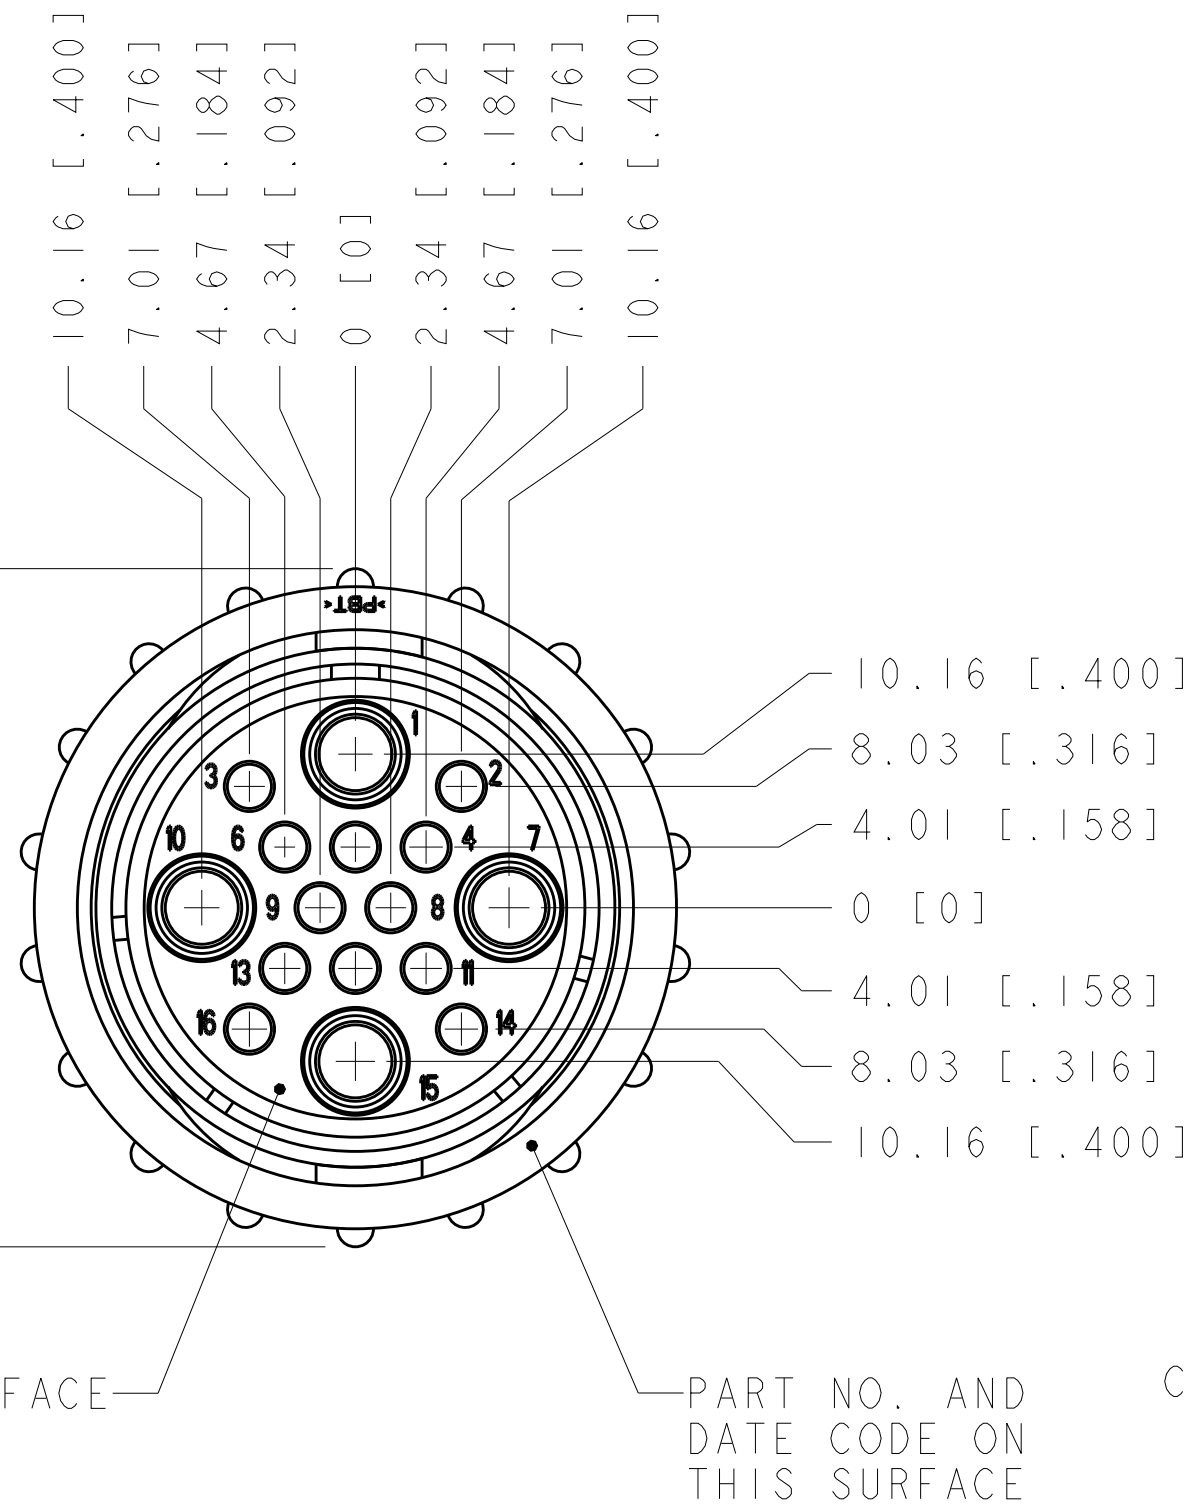

1. HOUSING & PRESSURE PLATE: NYLON, BLACK.
WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.
COUPLING RING: POLYESTER, BLACK.
2. WILL ACCEPT (12) MULTIMATE PINS AND (4) POWER MALE CONTACTS.

OBSOLETE	.150-.265	796332-2
	.095-.205	796332-1
	INSULATION DIA	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm[INCHES]

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±0.02
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	-

DWN S. WELDON 13DEC1999

CHK J. ENGLE 13DEC1999

APVD J. ENGLE 13DEC1999

PRODUCT SPEC 108-1579

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME PLUG ASSEMBLY, SERIES 6, REVERSE SEX, SIZE 23-16, CIRCULAR PLASTIC CONNECTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A200779	C-796332		-

SCALE 2:1 SHEET 1 OF 1 REV BI