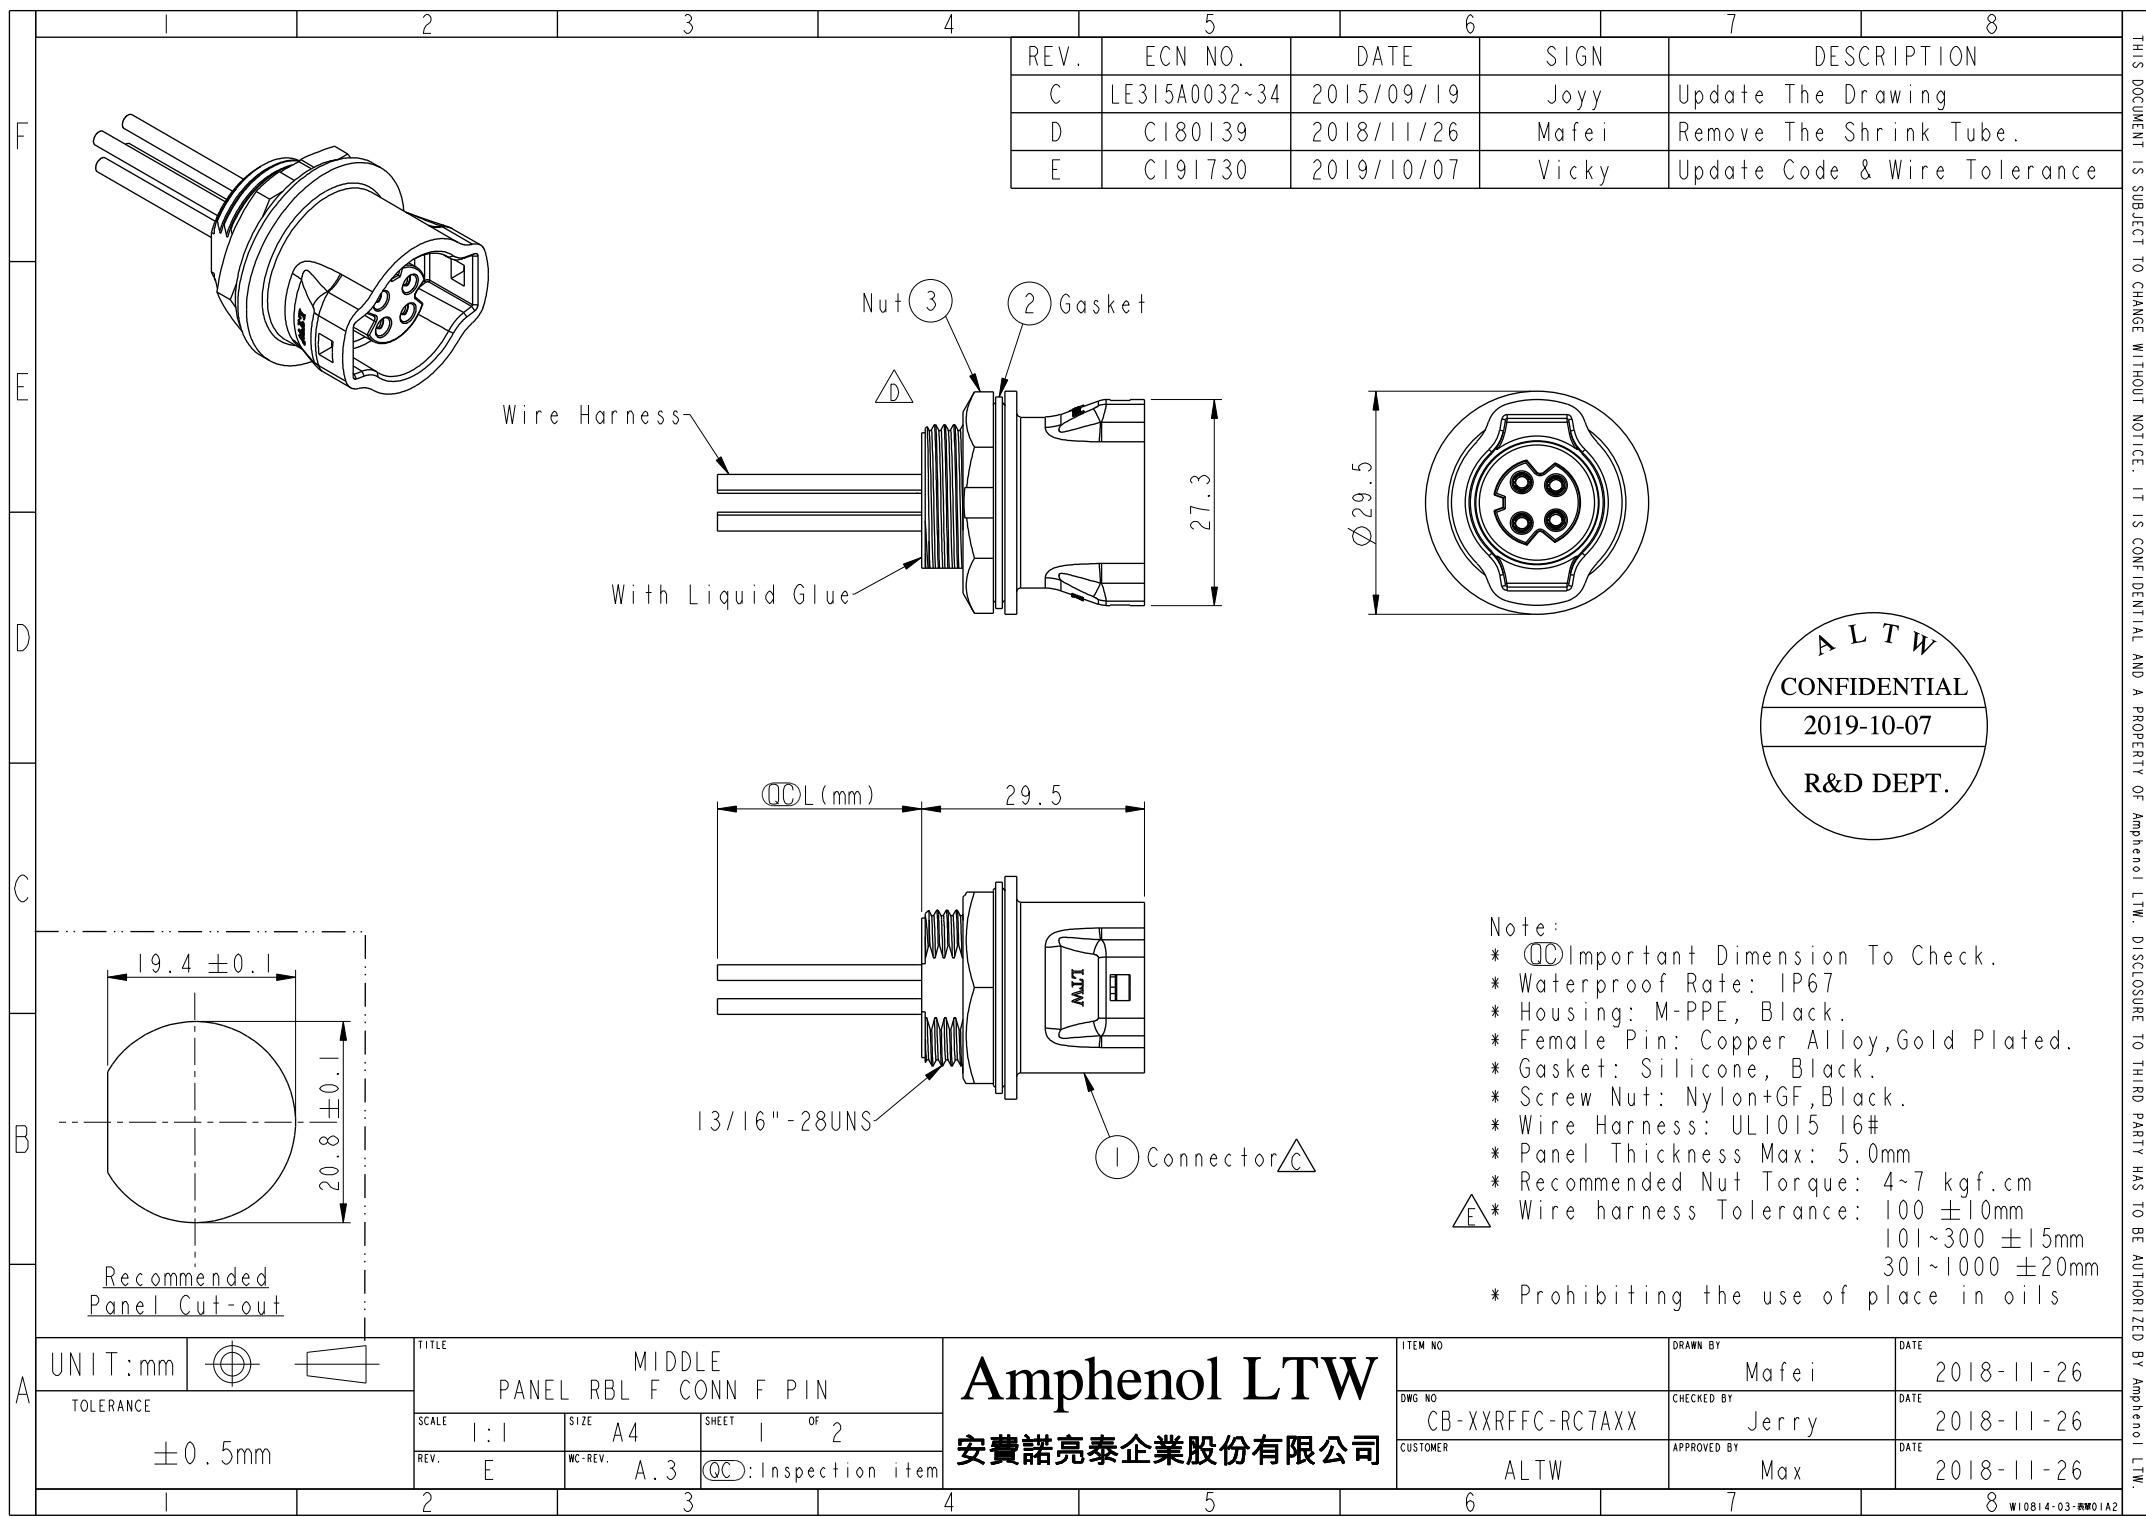






CB-XXRFFC-RC7AXX

Middle Size Current Rating 10A

XX:No. Of Pin(Pin 數)

R:Panel Rear Mounting(後鎖嵌面板式)

F:Female Connector(母座)


F:Female Pin(母Pin)




C:CrimpType(夾線組裝式)


10 : 100mm
15 : 150mm
20 : 200mm
A0 : 1000mm

Cable Pitch Unit:50mm
Wire Length(L):100~1000mm

A:UL 1015
7:IP67(防水等級 67)
C:Circular(圓座)
R:Snap in With Latch(彈臂卡合式)



Pin Out	4 -- 3 Red 紅 2 -- 1 Black 黑	4 Green 綠 3 Red 紅 2 -- 1 Black 黑	4 Orange 橙 3 Red 紅 2 Brown 棕 1 Black 黑
Pin Assignments Front View	 2Pin	 3Pin	 4Pin

UNIT:mm		TITLE MIDDLE PANEL RBL F CONN F PIN		ITEM NO	DRAWN BY Mafei	DATE 2018-11-26
TOLERANCE		SCALE 1:1	SIZE A4	DWG NO CB-XXRFFC-RC7AXX	CHECKED BY Jerry	DATE 2018-11-26
±0.5mm		REV. E	WC-REV. A.3	CUSTOMER ALTW	APPROVED BY Max	DATE 2018-11-26
		SHEET 2 OF 2				
		QC:Inspection item				

Amphenol LTW
安費諾亮泰企業股份有限公司