

ICP641620PA

Rechargeable Lithium Ion Polymer Battery Pack 3.7 V

Safety Circuit

Specifications

Renata Type	ICP641620
IEC Designation	ICP071622
Part Number	100695
Contact Method:	Wire AWG 30
Safety Circuit	Yes

Nominal Voltage	3.7 V
Nominal Capacity	165 mAh
Minimum Capacity	155 mAh (0.2C cut off 3.0 V at 20 °C)

Internal Impedance	< 370 mΩ / 50% SOC
--------------------	--------------------

Thickness (t)	Max 6.9 mm
Length (l)	Max 21.5 mm
Width (w)	Max 16 mm
Weight	~ 3.9 g

Charging Characteristic

Voltage	CC/CV – Constant Current / Constant Voltage
Current Normal	4.2 V CV
Max. Charging Current	0.5 C CC – 82.5 mA
Temperature at Charging	1.0 C CC – 165 mA
	0 °C 45 °C


Discharge Characteristic

Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 330 mA (for non continues discharge)
	1.0 C – 165 mA (for continues discharge)
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature	> 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)
--------------------------------	--

Storage Temperature	-20 °C ... 45 °C (0 °C ... 30 °C recommended in case of storage for more than 3 months)
---------------------	---

Dimensions

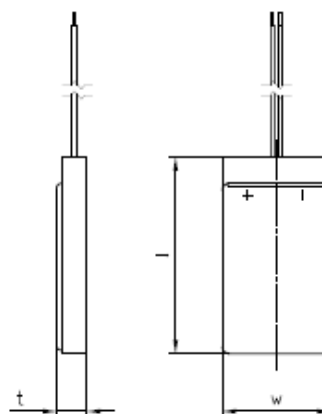

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. Li Ion ICP641620 – 11.09