

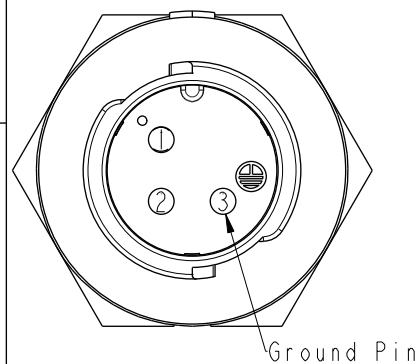
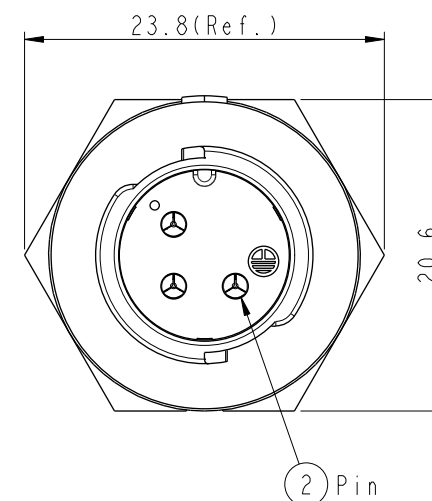
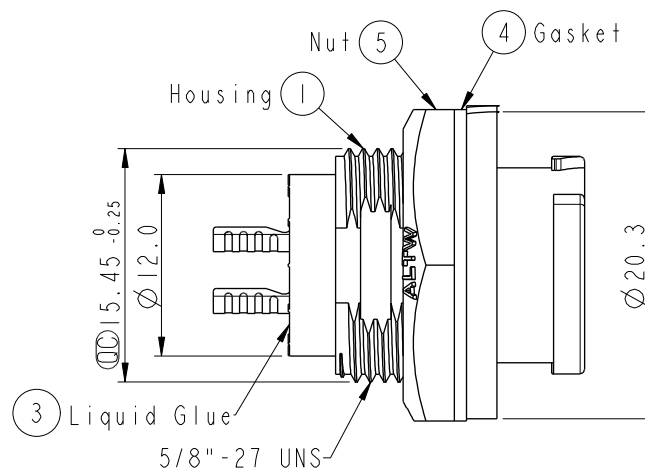
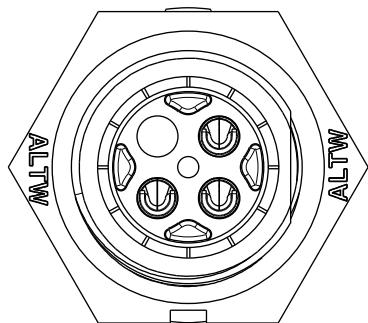



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/14	Vicky	Change Note



Pin Assignments
Front View




Recommended Panel Cut-out

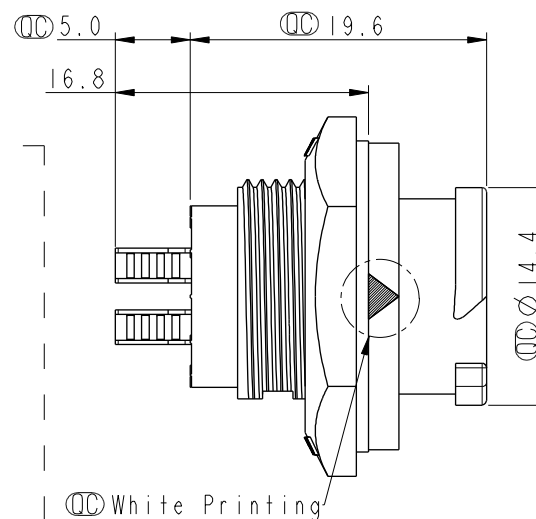

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP68, Unmated.
In 1 meter water within 24 hours
- * Housing: Thermoplastic, Black.
- * Pin: Copper Alloy, Gold Plated.
- * Nut: Thermoplastic, Black.
- * Gasket: Rubber, Gray.
- * Panel Thickness Maximum: 4.5mm
- * Gasket and Nut are packed separately in PE bags.

UNIT:mm



TOLERANCE
X ±0.25

TITLE
X Lok B-Size Receptacle
Rear Fastened M Conn M 3 Pin

SCALE 2:1	SIZE A4	SHEET 1	OF 1
REV. B	WC-REV. A.2	$\varnothing$ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO BB-03RMMS-QC800P	DRAWN BY Vicky	DATE 2019-03-14
DWG NO BB-03RMMS-QC800P	CHECKED BY Rita	DATE 2019-03-14
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-14