


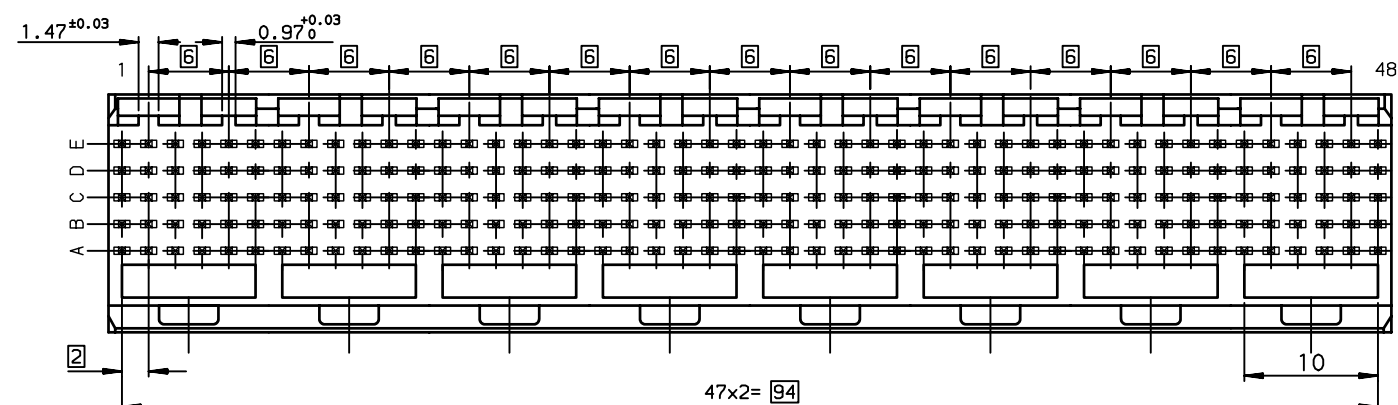
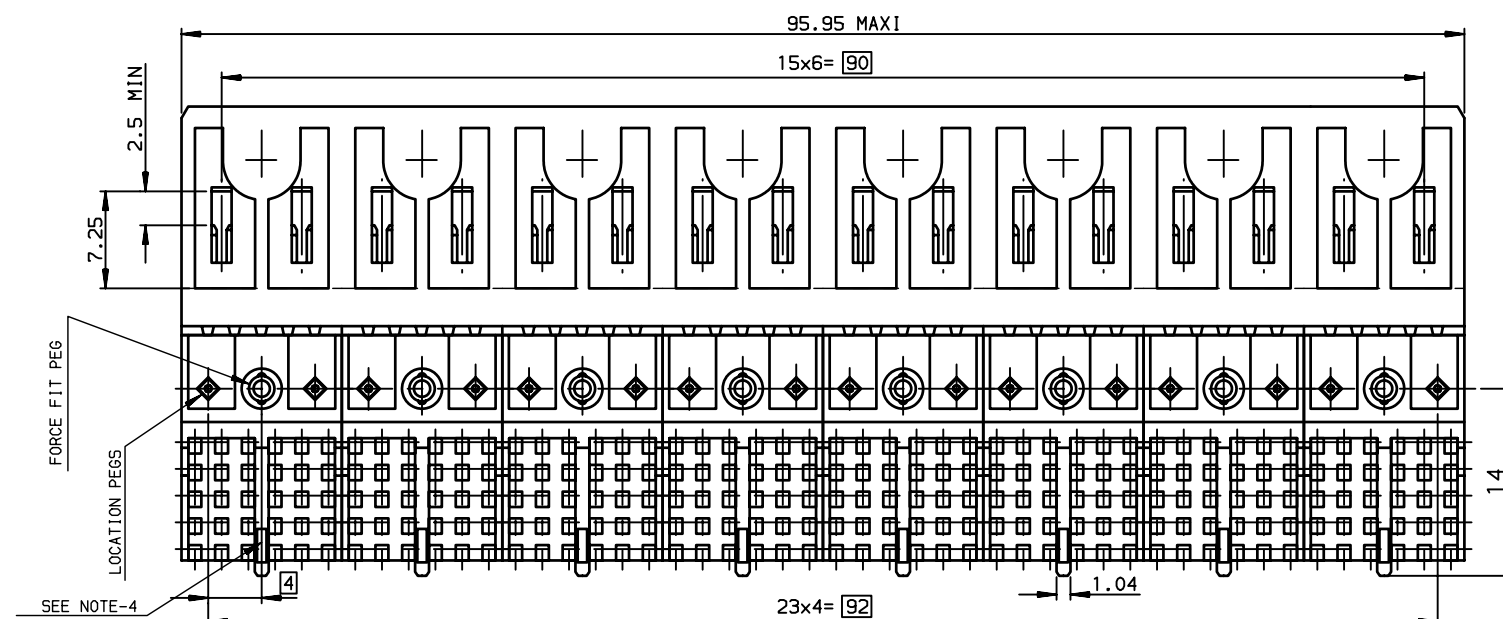


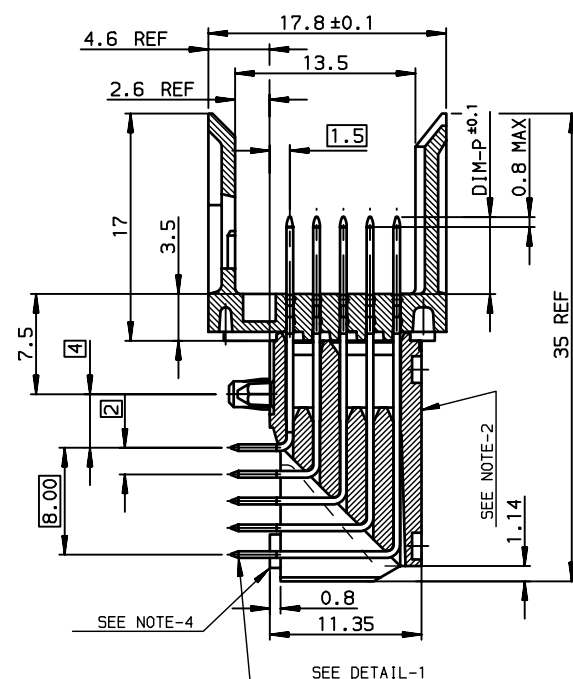

DETAIL OF FORCE-FIT PEGS

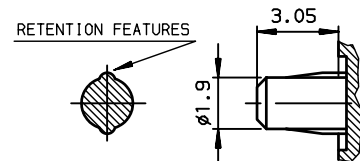


LAYOUT FOR P.C.B.
(PER 12mm LENGTH)

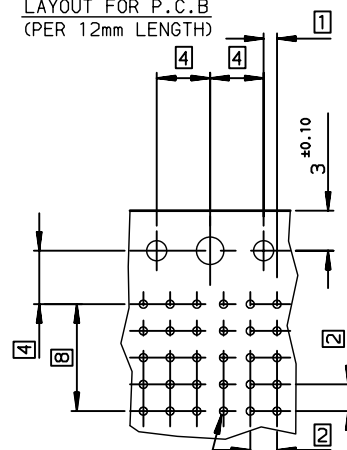

Hole according to product specification:
 65-12-445 (for press-fit) ,
 65-12-446 (for STB)

DETAIL-1: SOLDER PIN



TIN LEAD PART NUMBER

[illegible]

LEAD-FREE PART NUMBER

[illegible]

GENERAL CHARACTERISTICS AND ROHS INFORMATION:

SEE PRODUCT SPECIFICATION GS-12-446

NOTE-2: INSERTION IN PCB, HANDLING OR BENCH PRESS
NOTE-3: IF SUFFIX "P" IS ADDED IN P/N PACKAGING IS IN TRAYS
BUT CONNECTOR MARKING IS WITHOUT "P"

EXAMPLE: HM1XXXXXXXXXH6P, MARKED HM1XXXXXXXXXH6

NOTE-4: REAR CENTRAL SUPPORT FOR BETTER ASSY ON PCB

rev	ecn no	dr	date
C	-	MAS	2000/08/31
D	LS05-001	MLE	2005/03/15
E	LS06-0095	LGO	2006/07/10
F	LS07-0184	MLE	2007/07/24
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302 ✓		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	CHAMPION	1997/06/17	ANGULAR	LINEAR	0.X	±0.1	size A2	Scale 2.5		
Eng	LENOIR	1997/06/17			0.XX	±0.1		ECN	LS07-0184	
Chr	LEGARE	1997/06/17			0.XXX	±0.1				
Appr	LEGARE	1997/06/17	Product family				METRAL	Spec ref -		
			title METRAL RA HEADER 5 ROW STANDARD SOLDER 240 WAY				dwg no C-8626-0242	Rev.		
								F		
catalog no			-				CUSTOMER	sheet 1 of 1		