
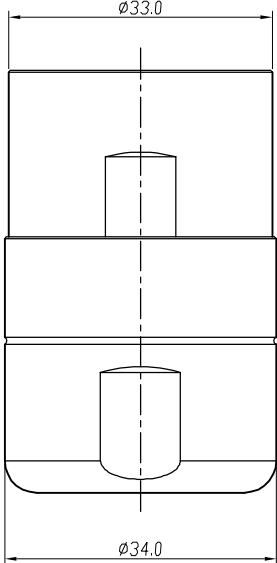

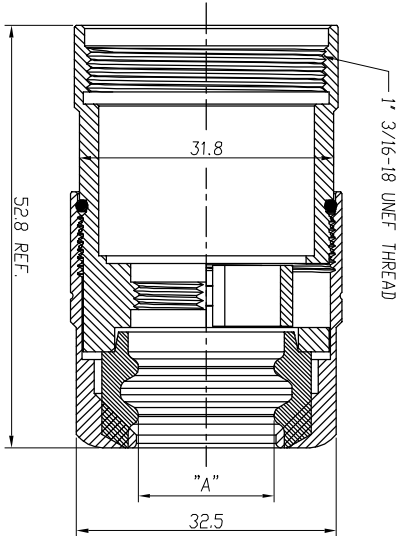


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
B1	-	RELEASE NEW DWG FORMAT	15-Dec-2014	Drack	Tommy
B2	-	Modify rubber material	13-May-2016	Ben	Tommy



	Dimension "A"	Cable OD Range
1	Ø15.8mm	16.0-17.0 mm
2	Ø20.0 mm	20.5-22.5 mm
3	Ø13.0mm	13.5-15.0 mm
4	Ø13.0 mm	13.5-14.0 mm
5	Ø15.8 mm	16.0-21.0 mm
6	Ø13.0 mm	11.0-15.0 mm

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
NUT: ZINC DIE CAST OR AL ALLOY, NICKEL PLATED.
O-RING: NBR.
SEAL: EPDM.
HOUSING BODY: ZINC DIE CAST OR AL ALLOY, NICKEL PLATED
- SPECIFICATIONS:
2.1 DEGREE OF PROTECTION: IP67 (MATED CONDITION)
2.2 RoHS COMPLIANT
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

SEE PART NUMBER CHART		DESCRIPTION		ITEM	
QUANTITY	PART NUMBER	MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED		1) All dimensions are in metric(mm).			
2) Tolerances are as follows:		DRAWN: Drack			
3) Hole reference =		DATE: 5/EC/2014			
4) Hole reference =		CHECKED:			
5) Hole reference =		ENGINEER:			
6) Hole reference =		APPROVAL:			
MATERIAL SPECIFICATIONS:		CUSTOMER:			
PROCESS SPECIFICATIONS:		THIS DRAWING IS SPECIFIED FOR:			
NEXT ASBY:		SPECIFICATIONS AND PERFORMANCE DATA:			
		SHOWN HEREIN ARE THE PROPERTIES OF:			
		OR REPRODUCTION ARE SUBJECT TO NORMAL:			
		DRAWING IS SUBJECT TO NORMAL:			
		SCALE: NONE			
		B C-			
		RTOL-20CPG-Sx			
		B2			
		ECO-MATE.CORD GRIP SIZE 20			
		Sine Systems - www.amphenol-sine.com			
		44724 Morley Drive			
		Clinton Township, MI 48038			