

Fixed Length Cable Assemblies

MIL-STD-1553B

MIL-S-DTL-1553 Twinax Cable Assemblies

Trompeter’s 21- series of cable assemblies are terminated with the most popular TRB and TRS connector configurations used in 1553 systems. These cable assemblies provide solutions in test laboratories because they have more flexibility and defined lengths. The fixed length cables could be the spring board into more specific requirements from customer programs

The 21- series of cable assemblies offer popular TRB and TRS connector configurations terminated to a variety of cable types. Fixed lengths range from 1 foot to 10 feet, custom lengths are also available


Features & Benefits

- Available with the most common connector types offered, with a wide range of cable length also supported
- Cable Lengths range from 1 to 10 feet that are available for immediate delivery
- Custom lengths are also available
- 78 ohm twinax cable
- 50 and 75 ohm triax cable
- TRB connectors (straight and right angle)
- TRS connectors (straight and right angle)



| Part Number | Configuration | | Cable Length |
|-------------|-----------------------|---------|--------------|
| 21-16-12 | TRB Right Angle / TRB | M17/176 | 12 inches |
| 21-16-24 | TRB Right Angle / TRB | M17/176 | 24 inches |
| 21-16-36 | TRB Right Angle / TRB | M17/176 | 36 inches |
| 21-16-72 | TRB Right Angle / TRB | M17/176 | 72 inches |
| 21-16-120 | TRB Right Angle / TRB | M17/176 | 120 inches |
| 21-19-12 | TRS Right Angle / TRS | M17/176 | 12 inches |
| 21-19-24 | TRS Right Angle / TRS | M17/176 | 24 inches |
| 21-19-36 | TRS Right Angle / TRS | M17/176 | 36 inches |
| 21-19-72 | TRS Right Angle / TRS | M17/176 | 72 inches |
| 21-19-120 | TRS Right Angle / TRS | M17/176 | 120 inches |

21-17 TRS Plug to TRB Plug - Cable Assembly

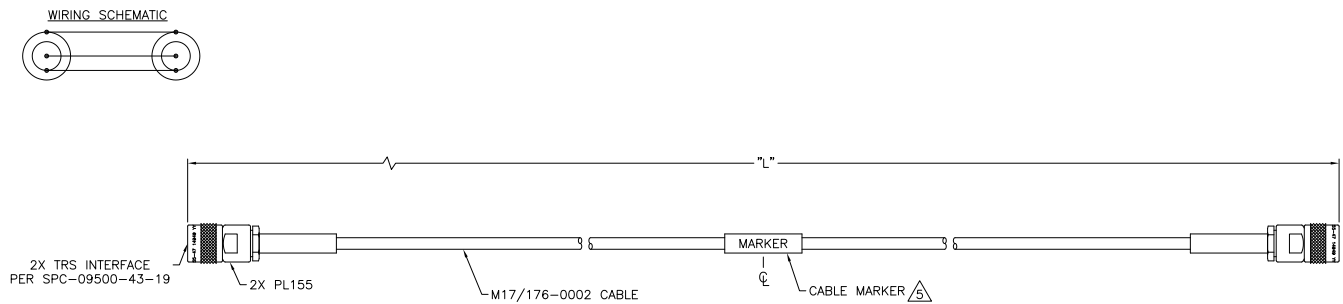

21-14 TRS Plug to TRB Plug - Cable Assembly

