

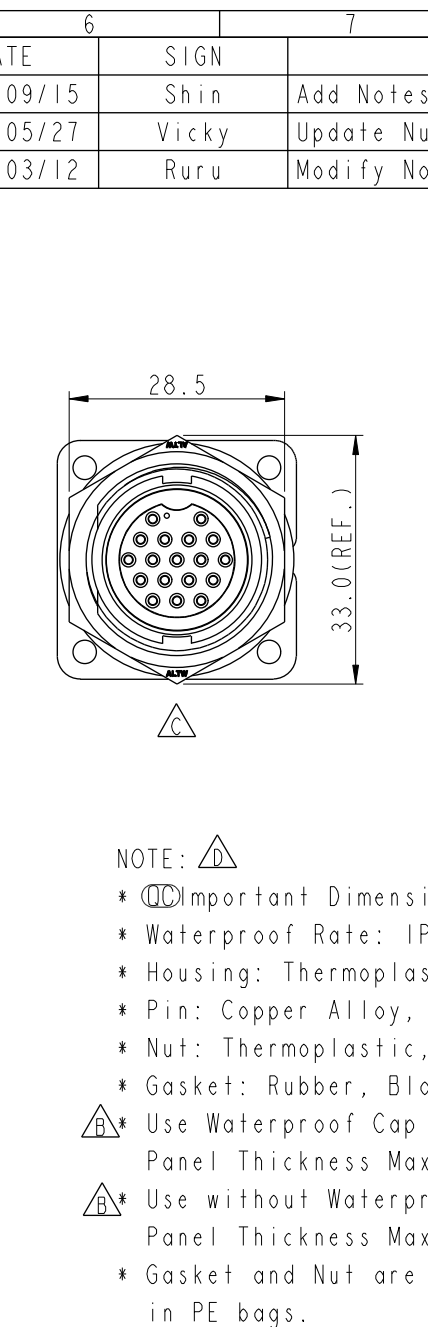
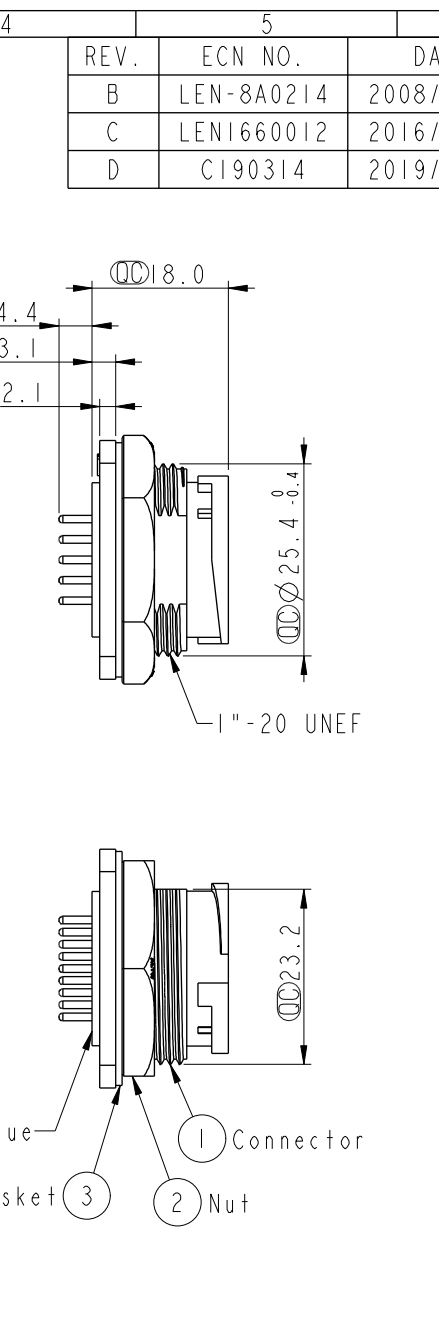
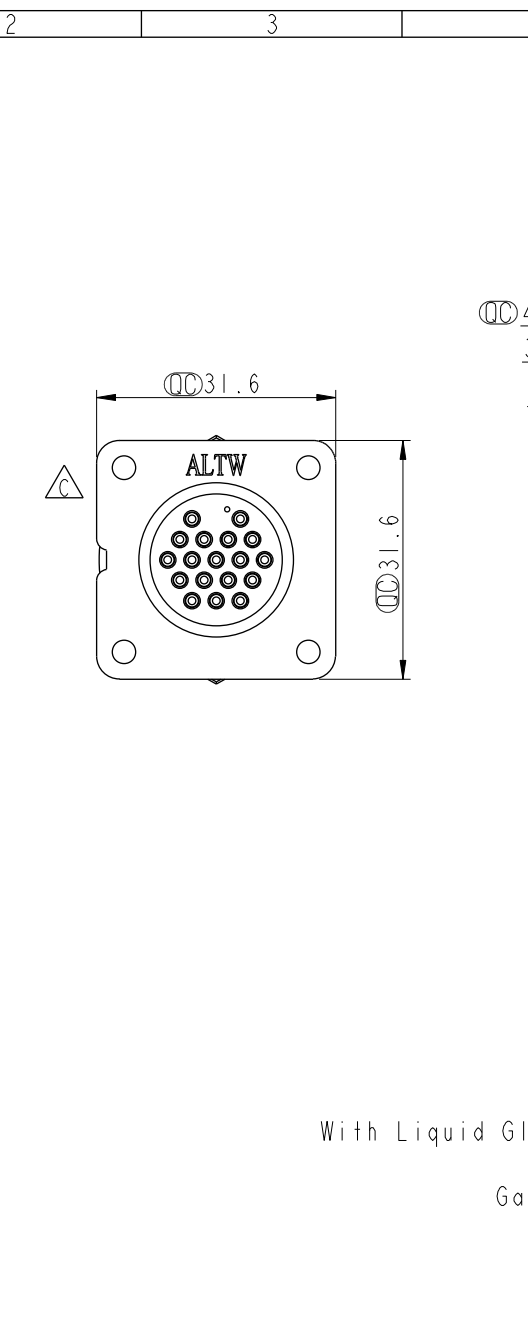


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0214	2008/09/15	Shin	Add Notes
C	LEN1660012	2016/05/27	Vicky	Update Nut View & Logo
D	CI90314	2019/03/12	Ruru	Modify Note

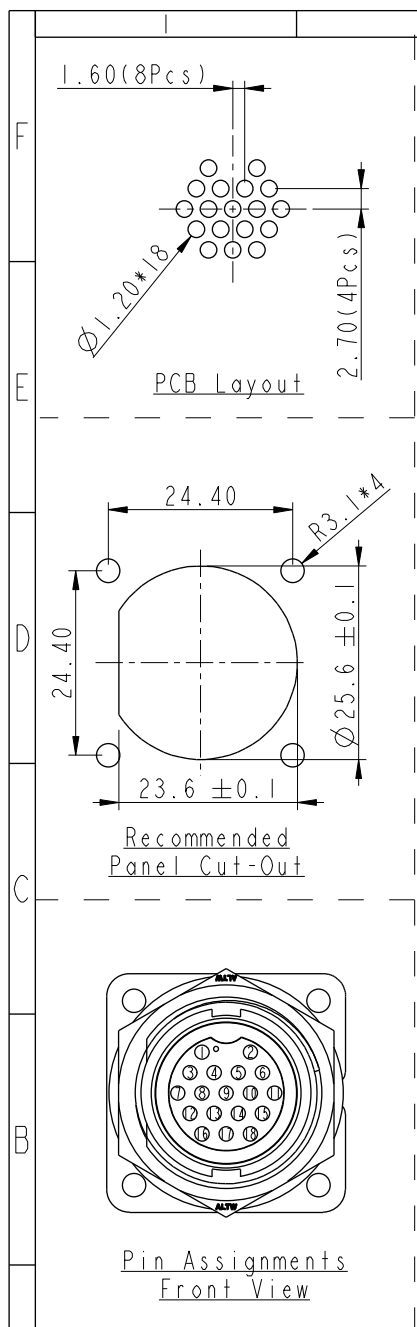

NOTE:

- * Important Dimension.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black
- * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
- * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm
- * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TOLERANCE		TITLE		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Lock Type Connector for Panel Mount		安費諾亮泰企業股份有限公司		DD-18PMFP-LS7001		Ruru		2019-03-12	
.XXX ±0.05		ANGLES ±1°		18Pin Male Connector Female Pin				DD-18PMFP-LS7001		Rita		2019-03-12	
SCALE 1:1		SIZE A4		SHEET 1 OF 1				CUSTOMER		APPROVED BY		DATE	
REV. D		WC-REV. A.3		Inspection item				ALTW		Max		2019-03-12	