

55310 Flat Pack Digital Hall Sensor



Features:

- Magnetically operated position sensor
- Unipolar digital hall switch
- 3 wire with open-drain output
- EMC protection
- Reverse/over voltage protection


Benefits:

- High switching speed up to 10kHz
- Long life; up to 20 billion operations
- Unaffected by harsh environments
- Custom connector, wire length options available. Consult Hamlin.
- Standard actuators available. Consult Hamlin.

Applications:

- Position sensing
- Limit sensing
- Speed measurement
- Magnetic encoders


DIMENSIONS mm

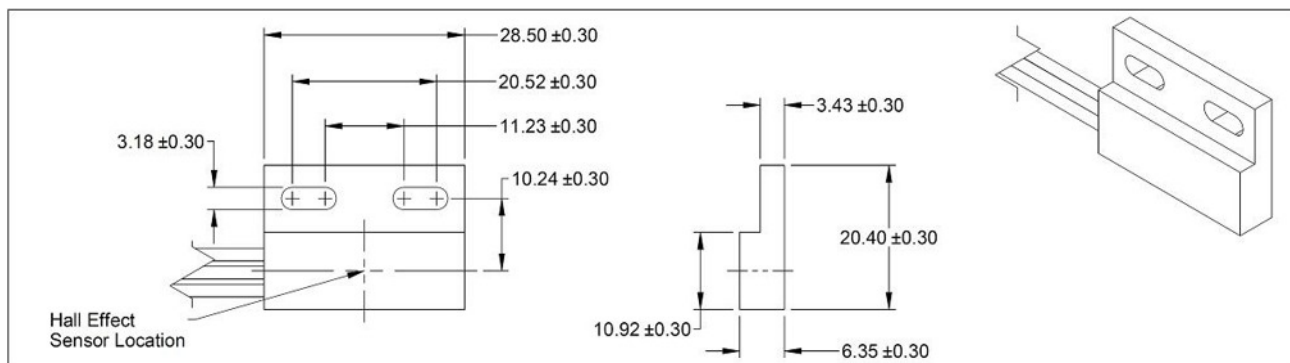


SPECIFICATIONS

Hall Effect Device			Unipolar Digital Switch
Operating Voltage	Recommended	Vdc	4.75 to 24.0
Over Voltage	Absolute Max	Vdc	30
Reverse Voltage	Absolute Max	Vdc	-20
Supply Current		mA-Max	6
Output Current		mA-Max	20
Sensor Actuation w/Magnetic South Pole	Operate (output low)	Gauss - Typical	55
	Release (output high)	Gauss - Typical	35
Switching Speed		kHz Max	10
Temperature	Operating	°C	-40 to +105
	Storage	°C	-65 to +105
Wire	Size	AWG	20
	Insulation	SAE	J-1128, Type TXL
	Length	mm	300

ORDERING INFORMATION

Termination Options							
Select Option	Description			Select Option	Description		
A	Stripped Leads		Color Function Black Ground White Signal Red V(in)	C	Molex Connector MX 150 33481-0301		Pin Color Function 1 Black Ground 2 White Signal 3 Red V(in)

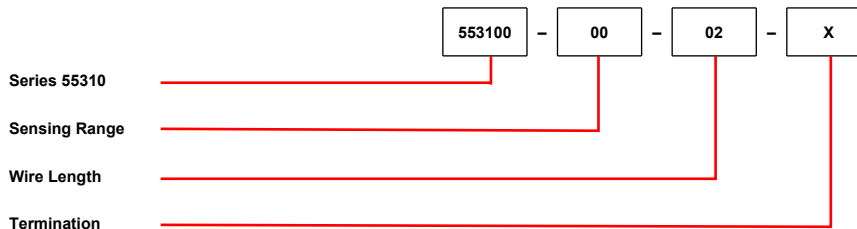

Hamlin USA Tel: +1 920 648 3000 • Fax: 1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0) 1603 257700 • Fax: +44 (0) 1603 257702 • Email: sales.uk@hamlin.com
Hamlin GmbH Tel: +49 (0) 6142 923920 • Fax: +49 (0) 6142 923921 • Email: sales.de@hamlin.com
Hamlin China Tel: +86 (0) 512 69365 800 • Fax: +86 (0) 512 69365 811 • Email: sales.cn@hamlin.com