
## **Resistors**

## **TT** Electronics

# Four-Terminal Current-Sensing Wirewound Resistor

#### **4LPW Series**

- $TC = \pm 40 \text{ppm/}^{\circ}C$
- 3 watts to 15 watts
- 0.005 ohm to 1.0 ohm
- ±1%, ±2, ±3, ±5, ±10% tolerance
- Flameproof construction



#### NOT RECOMMENDED FOR NEW DESIGNS


All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

#### **Electrical Data**


IRC Type	Power @ 25°C Max. Current (amps)		Resistance Range (ohms)	
4LPW-3	3	10	.005 TO 1.0	
4LPW-5	5	10	.005 TO 1.0	
4LPW-7	7	20	.01 TO 1.0	
4LPW-10	10	20	.01 TO 1.0	
4LPW-15	15	20	.01 TO 1.0	

Please note: When ordering the alternate configuration please add an "A" after the part number. (4LPW-3A)

## Standard Configuration

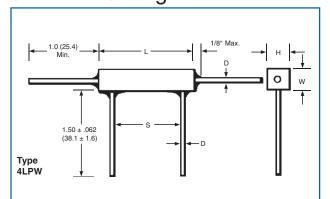

## Alternate Configuration

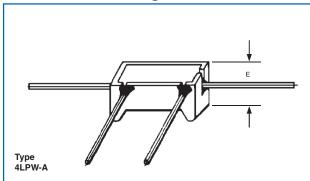

#### Dimensions (Inches (mm))

IRC Type	L ±.063 (1.6)	W ±.03 (.8)	H ±.03 (.8)	S ±.062 (1.6)	D Diameter	E ±.03 (.8)
4LPW-3	.88 (22.4)	.31 (7.87)	.31 (7.87)	.563 (14.3)	.036 (.9)	.38 (9.65)
4LPW-5	.88 (22.4)	.38 (9.65)	.35 (8.89)	.563 (14.3)	.036(.9)	.41 (10.4)
4LPW-7	1.39 (35.3)	.38 (9.65)	.35 (8.89)	1.013 (25.7)	.036(.9)	.47 (11.9)
4LPW-10	1.88 (47.8)	.38 (9.65)	.35 (8.89)	1.388 (35.3)	.036(.9)	.47 (11.9)
4LPW-15	1.88 (47.8)	.50 (12.7)	.50 (12.7)	1.388 (35.3)	.036 (.9)	.63 (16.0)


#### General Note

BI Technologies IRC Welwyn




### 4LPW Series NOT RECOMMENDED FOR NEW DESIGNS

#### Temperature Rise Chart

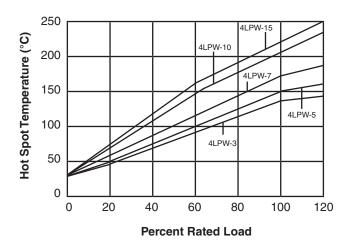

#### **Power Derating Curve**

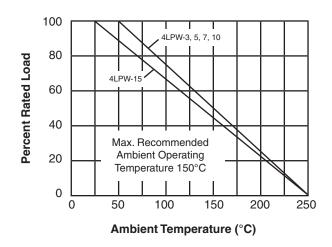

### **Ordering Data**

