

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		1	NEW DRAWING	21SEP2013	GK	EC

SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 1000 A, 690 VAC
LINE FREQUENCY: 50-60 Hz
NOMINAL LEAKAGE CURRENT: 10mA
MAXIMUM LEAKAGE CURRENT: 330mA @ 400V, 50HZ

OPERATING AMBIENT TEMPERATURE RANGE
@ RATED CURRENT, I : -10°C TO +50°C

IN AN AMBIENT, T, HIGHER THAN 40°C,
THE MAXIMUM OPERATING
CURRENT, I, IS AS FOLLOWS:

$$I_o = I_R \sqrt{\frac{100 - T_o}{50}}$$

RELIABILITY SPECIFICATIONS

STORAGE TEMPERATURE: -40°C TO +85°C
HUMIDITY: 21 DAYS @ 40°C AND 95% RH

TEST SPECIFICATIONS

INDUCTANCE, NOMINAL: 36.8 µH

CAPACITANCE @ 1 kHz, 0.25 VAC MAX., 25°C ±1°C:
LINE TO GROUND: 2.62 µF
LINE TO LINE: 11.9 µF

DISCHARGE RESISTOR





L/G AND L/L I.R. : 666kΩ/666kΩ
IR (NO DISCHARGE RESISTOR) 20°C, 50% RH AND 100VDC, MIN: 6000 MOhm

RECOMMENDED RECEIVING INSPECTION HIPOT

LINE TO GROUND FOR 1 MINUTE: 2200 VDC FOR 1 MINUTE
LINE TO LINE FOR 1 MINUTE: 2160 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY
A FILTER IS FOR YOUR ENGINEERING TO
TEST THE UNIT IN YOUR EQUIPMENT.

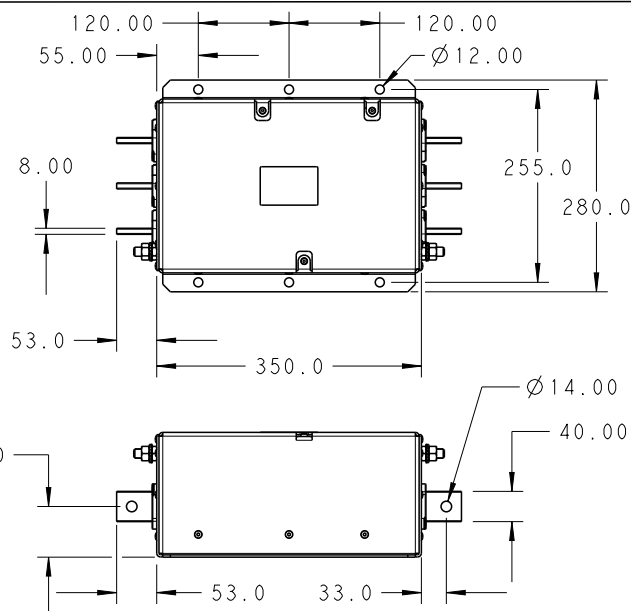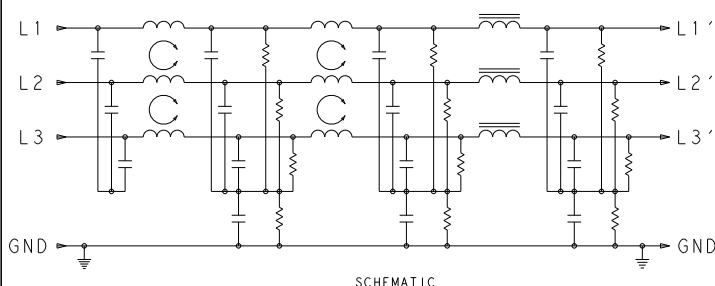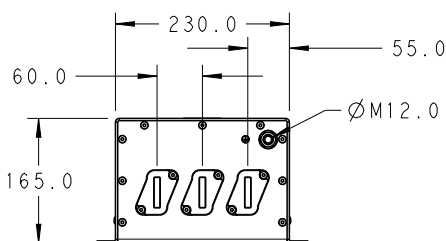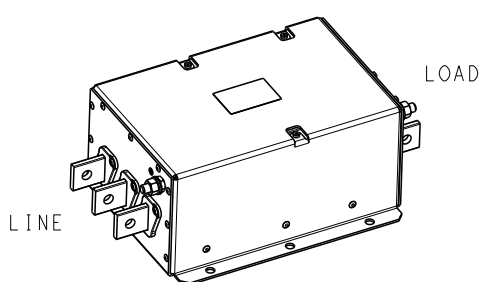

* DO NOT LOOSEN INNER GROUND NUTS.
TORQUE OUTER GROUND NUTS TO:
25-30 NM [220-260 IN-LB]

TYPICAL INSERTION LOSS
COMMON MODE 50/50 Ω; DIFFERENTIAL MODE 100/100 Ω

MHz	0.01	0.05	0.15	0.5	1.0	3.0	5.0	10	30
CM	12	13	56	71	67	49	45	37	18
DM	32	46	60	62	58	46	41	35	27

20

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

BY -

COPYRIGHT 20


©

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±2.0
1 PLC ±1.0
2 PLC ±0.13
3 PLC ±0.013
4 PLC ±0.0001
ANGLES ±-



DWN

GK

21SEP2013

CHK

EC

21SEP2013

APVD

EC

21SEP2013

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

MATERIAL

-

FINISH

-



TE Connectivity

NAME

1000ACPD12
3-PHASE DELTA FILTER

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A4

00779

C-9-1609148-0-1

-

Customer Drawing

SCALE 1:1

SHEET 1 OF 1

REV 1