

## Main

|                             |                                                                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product            | Harmony XAP                                                                                                                               |
| Product or component type   | Die-cast empty control station                                                                                                            |
| Device short name           | XAPM                                                                                                                                      |
| Product front plate size    | 80 x 175 mm                                                                                                                               |
| Usable depth                | 1.93 in (49 mm)                                                                                                                           |
| Number of cut-out           | Undrilled                                                                                                                                 |
| Colour of base of enclosure | Blue                                                                                                                                      |
| Colour of cover             | Blue                                                                                                                                      |
| Material                    | Zinc alloy                                                                                                                                |
| Cable entry                 | 1 hole with blanking plug for cable gland with <= 0.71 in (18 mm)<br>1 hole without blanking plug for cable gland with <= 0.71 in (18 mm) |
| Product mounting            | Flush mounting                                                                                                                            |
| IP degree of protection     | IP65 conforming to IEC 60529<br>IP69K<br>IP69 conforming to NF C 20-010                                                                   |

## Complementary

|                |                      |
|----------------|----------------------|
| Product weight | 1.98 lb(US) (0.9 kg) |
|----------------|----------------------|

## Environment

|                                       |                                                                      |
|---------------------------------------|----------------------------------------------------------------------|
| protective treatment                  | TC                                                                   |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                           |
| ambient air temperature for operation | -40...158 °F (-40...70 °C)                                           |
| electrical shock protection class     | Class I conforming to IEC 60536<br>Class I conforming to NF C 20-030 |


## Offer Sustainability

|                                                                                                                            |                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| WARNING: This product can expose you to chemicals including:                                                               | WARNING: This product can expose you to chemicals including:                                                               |
| Nickel compounds, which is known to the State of California to cause cancer, and                                           | Nickel compounds, which is known to the State of California to cause cancer, and                                           |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## Dimensions and Fixing

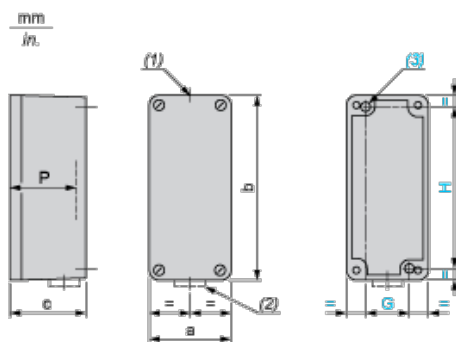

- (1) 1 hole, without blanking plug, for cable gland with 18 mm/0.71 in. maximum clamping capacity  
 (2) 1 hole, with blanking plug (protrusion 6 mm/0.24 in.), for cable gland with 18 mm/0.71 in. maximum clamping capacity  
 (3) 2 x Ø 5.6 mm/0.22 in. holes, depth 20 mm/0.79 in.

| a  |      | b   |      | c    |      | G  |      | H   |      | P  |      |
|----|------|-----|------|------|------|----|------|-----|------|----|------|
| mm | in.  | mm  | in.  | mm   | in.  | mm | in.  | mm  | in.  | mm | in.  |
| 80 | 3.15 | 175 | 6.89 | 51.5 | 2.03 | 50 | 1.97 | 160 | 6.30 | 49 | 1.93 |