
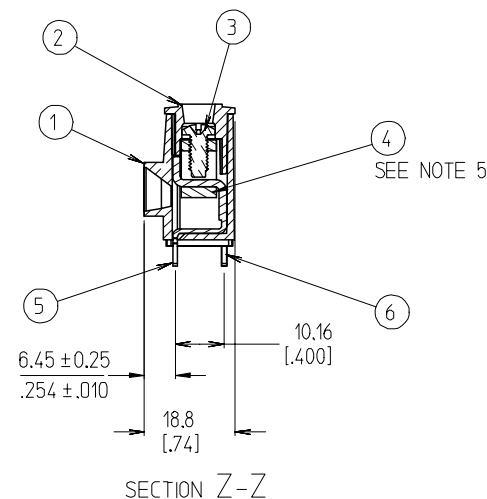


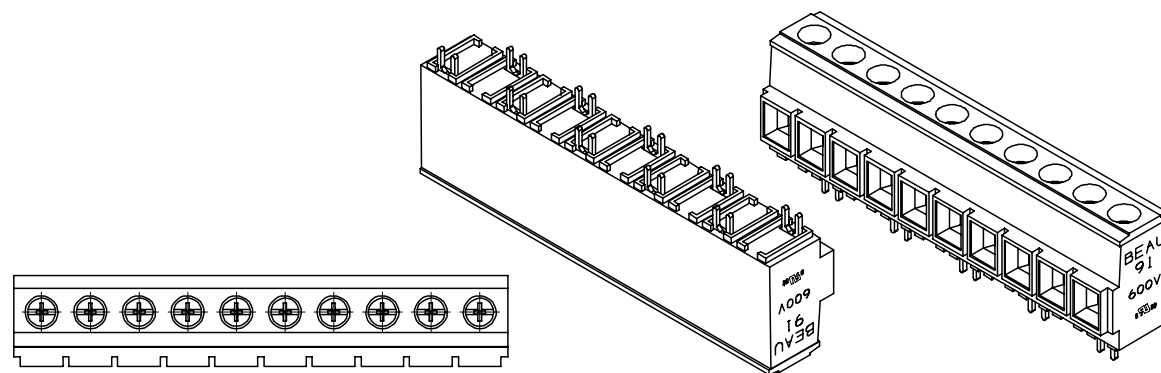

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. INCH DMS. ARE SHOWN IN BRACKETS [XXX].
4. DESIGNED TO MEET UL 1059 CLASS C 600 VOLTS.
5. SCREWS ARE DRIVEN DOWN FULLY TO CLOSE CAGE CLAMPS.
6. ASSEMBLY IS ROHS COMPLIANT BY EXEMPTION.
COMPONENTS MARKED WITH AN ASTERISK (*) ARE ROHS COMPLIANT BY EXEMPTION. ALL OTHERS ARE ROHS COMPLIANT.

INITIAL RELEASE EC NO: ET2007-0372 DRWN: CLYORK 2007/04/05 CHKD: JMACNEIL 2007/04/27 APPR: JMACNEIL 2007/04/30	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
					MM/IN					
							TITLE			
							10.16MM [.400] SR BTS			
							8 AWG ASSY, 40 AMP, 600V			
							W/ CAGES CLOSED			
							MOLEX MOLEX INCORPORATED			
							DOCUMENT NO.			
							SD-39919-012			
							SHEET NO.			
				1 OF 1						
A	REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				