
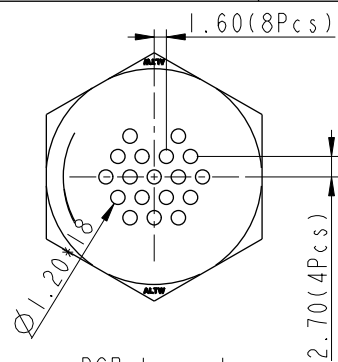


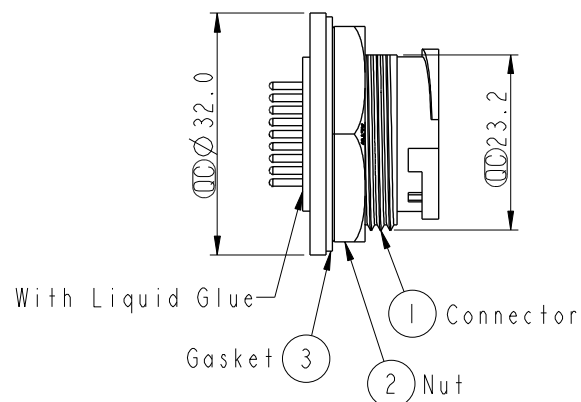

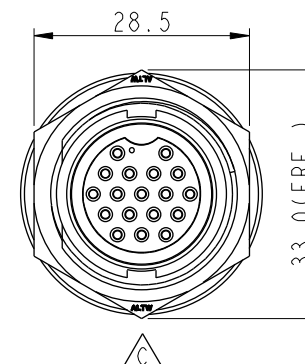
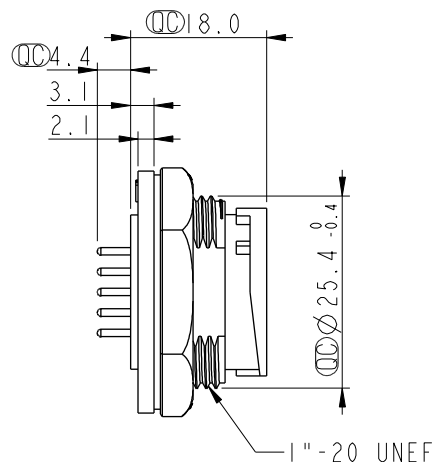


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0213	2008/09/15	Shin	Add Notes
C	LEN1660011	2016/05/27	Vicky	Update Nut View & Logo
D	CI90314	2019/03/12	Ruru	Modify Note



PCB Layout

Recommended
Panel Cut-OutPin Assignments
Front View

With Liquid Glue

Connector

Nut

Note:

- * Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

* Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm

* Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm

- * Gasket and Nut are packed separately in PE bags.

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE
Lock Type Connector for Panel Mount
18Pin Male Connector Female Pin

SCALE	1:1	SIZE	A4	SHEET	1	OF	1
REV.	D	WC-REV.	A.3	Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DD-18PMFP-LC7001	DRAWN BY	Ruru	DATE	2019-03-12
DWG NO	DD-18PMFP-LC7001	CHECKED BY	Rita	DATE	2019-03-12
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-12