


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1730321	2017/03/21	Vicky	Update Logo
D	LEN1840082	2018/04/13	Ethan	Modify Panel Thickness
E	CI90310	2019/03/12	Ruru	Modify Note

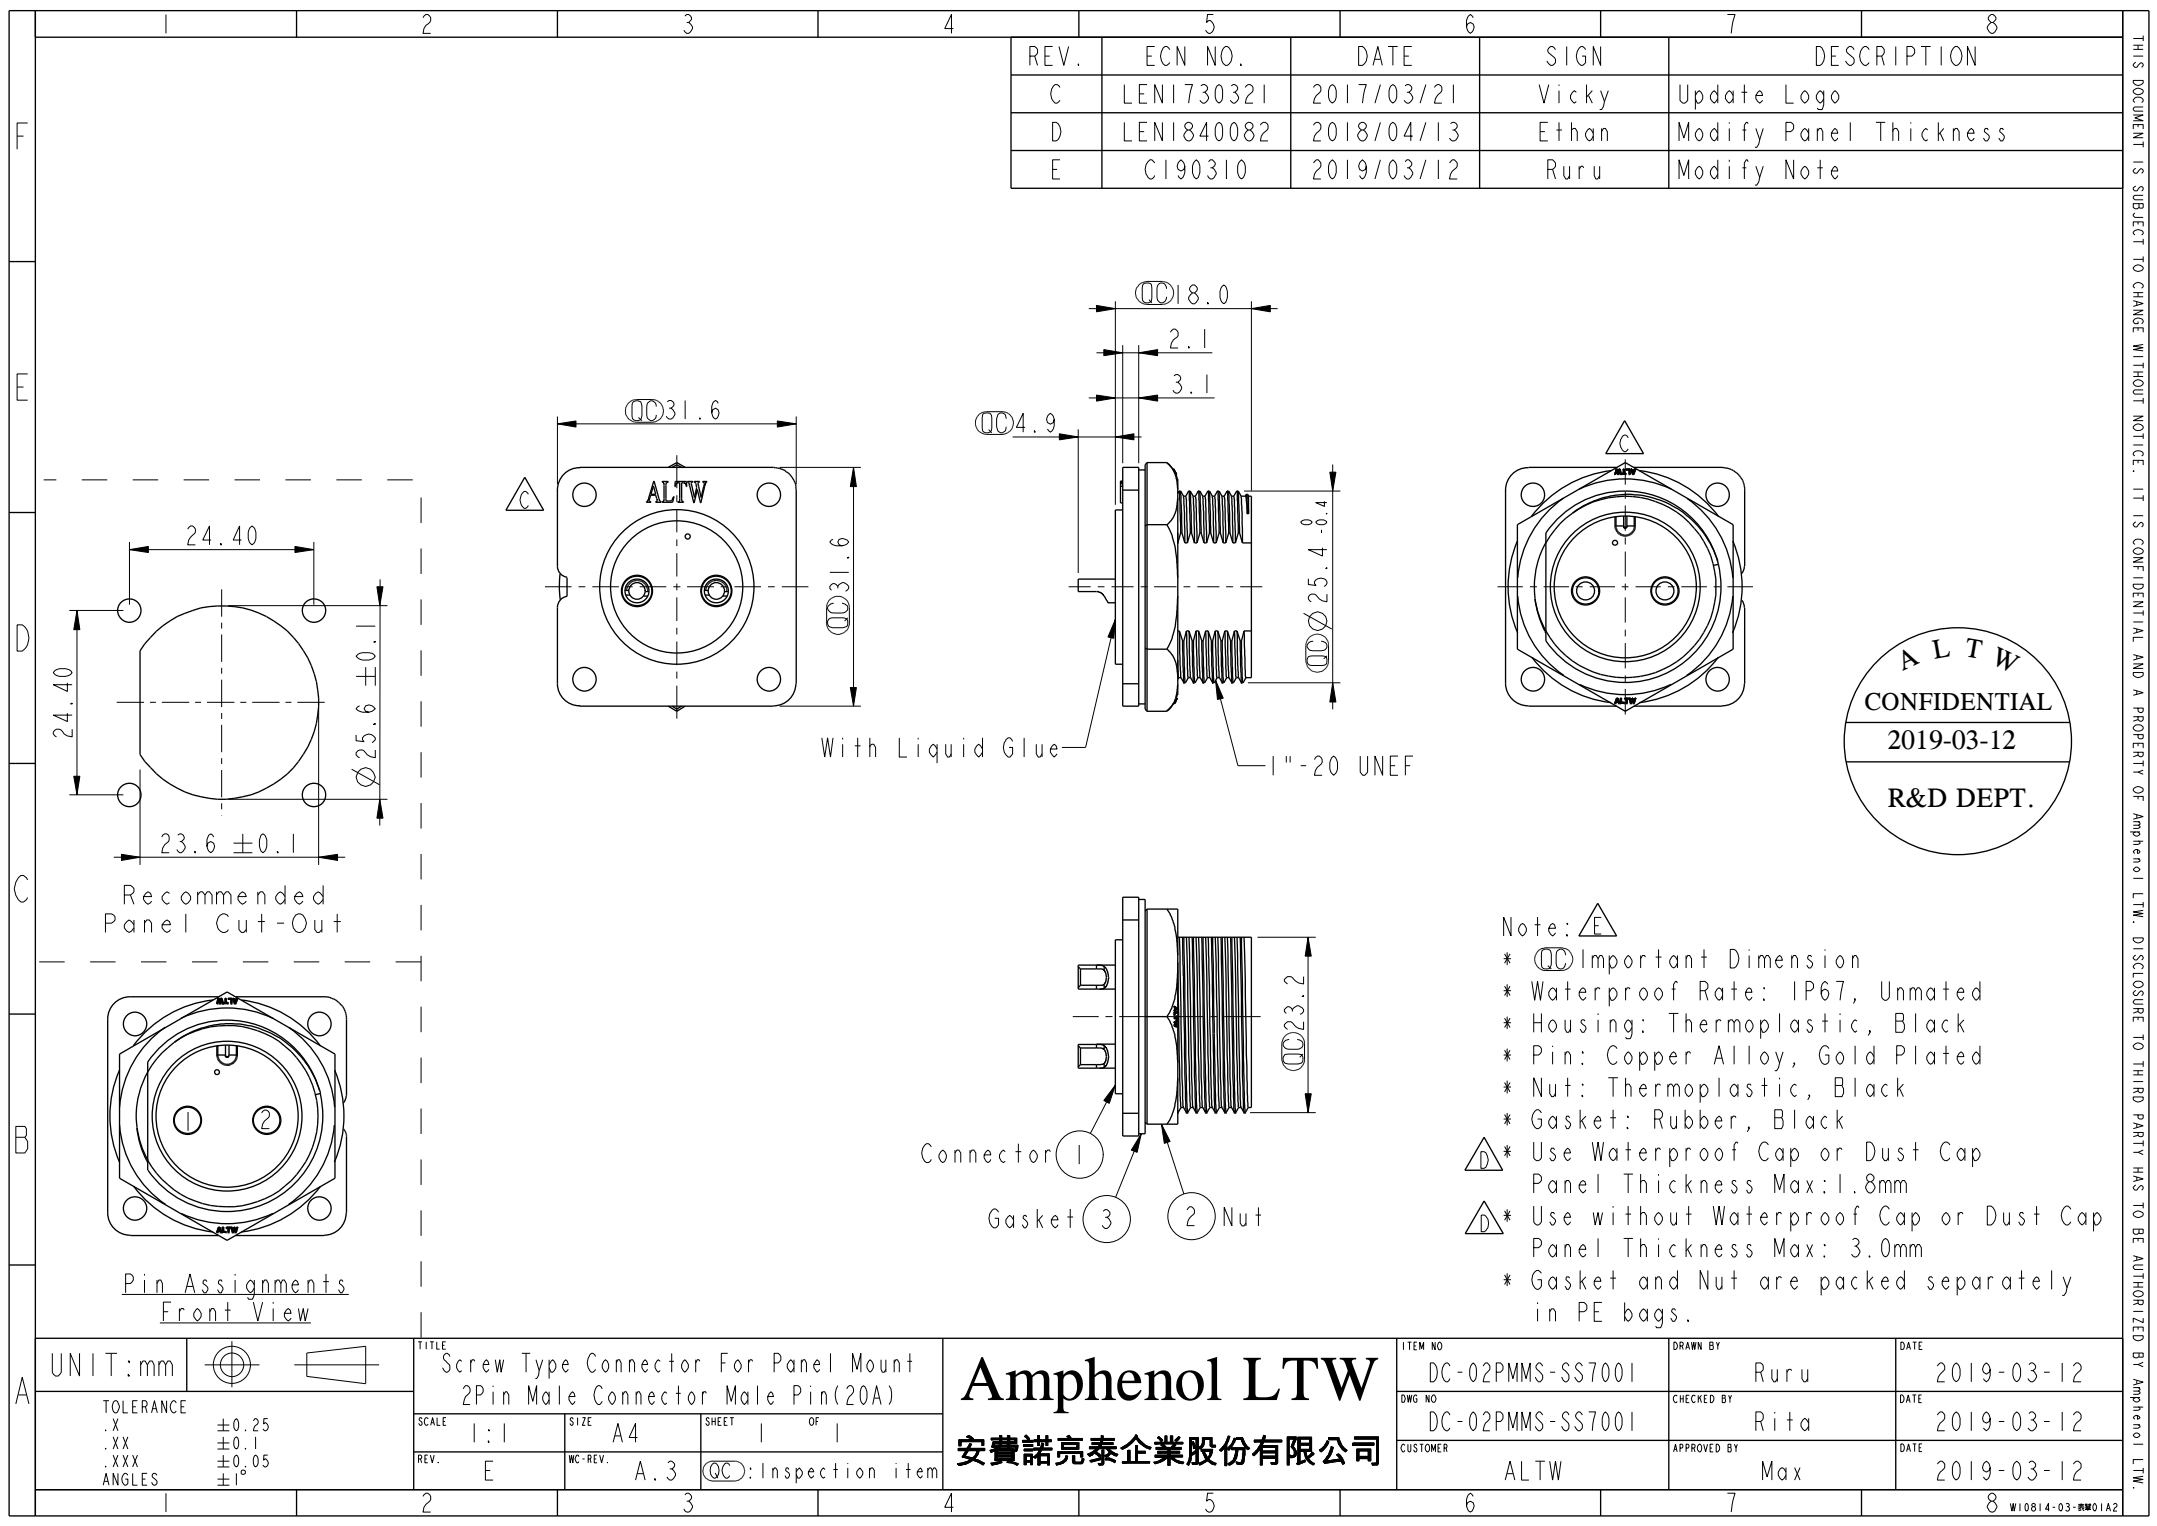

ALTW
CONFIDENTIAL
2019-03-12
R&D DEPT.

Note:  Important Dimension
* Waterproof Rate: IP67, Unmated
* Housing: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Black
 * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 1.8mm
 * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
* Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE Screw Type Connector For Panel Mount 2Pin Male Connector Male Pin(20A)		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO DC-02PMMS-SS7001	DRAWN BY Ruru	DATE 2019-03-12
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO DC-02PMMS-SS7001	CHECKED BY Rita	DATE 2019-03-12
REV. E		WC-REV. A.3	QC: Inspection item			CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-12