





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	U2	REVISED PER ECO-13-017833	12FEB2014	NK	MZ
	V	REVISED PER ECO-17-004657	06APR2017	BDA	MZ

D


C

B

A

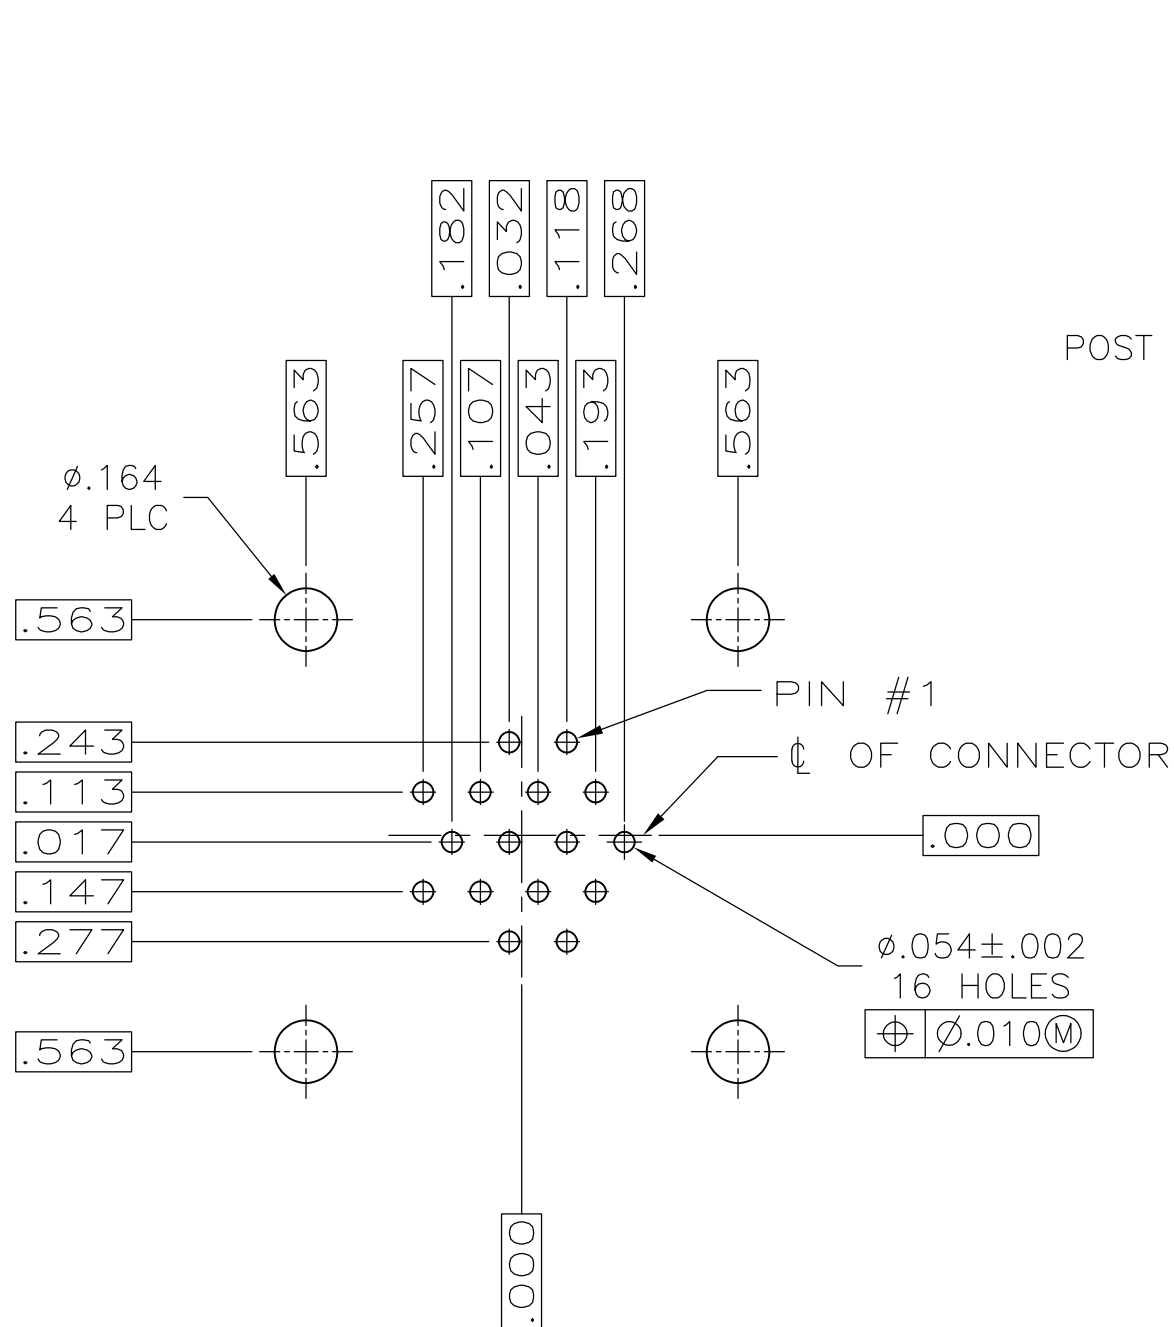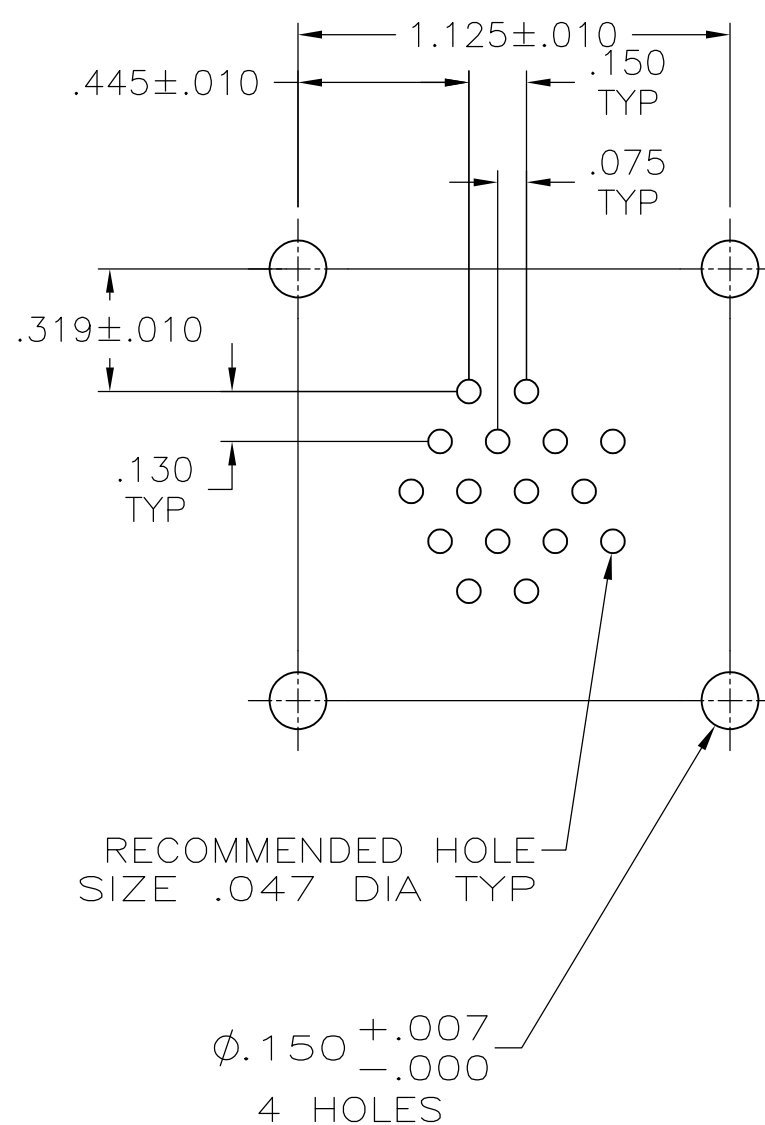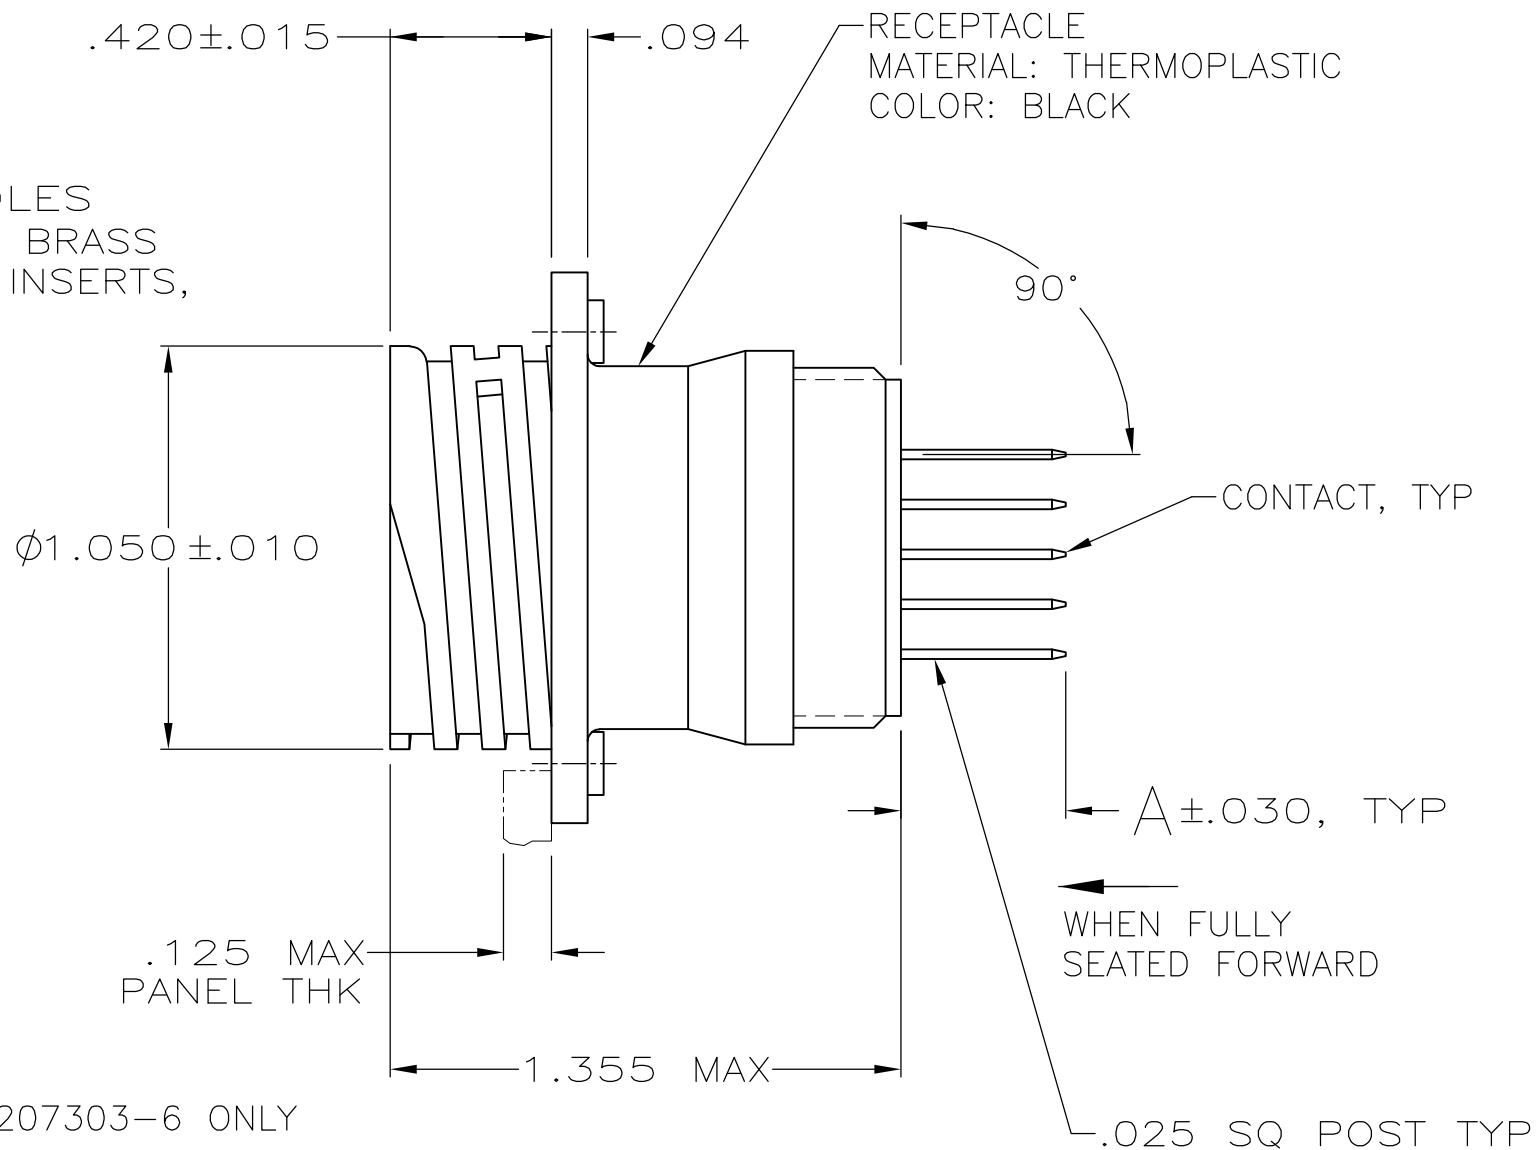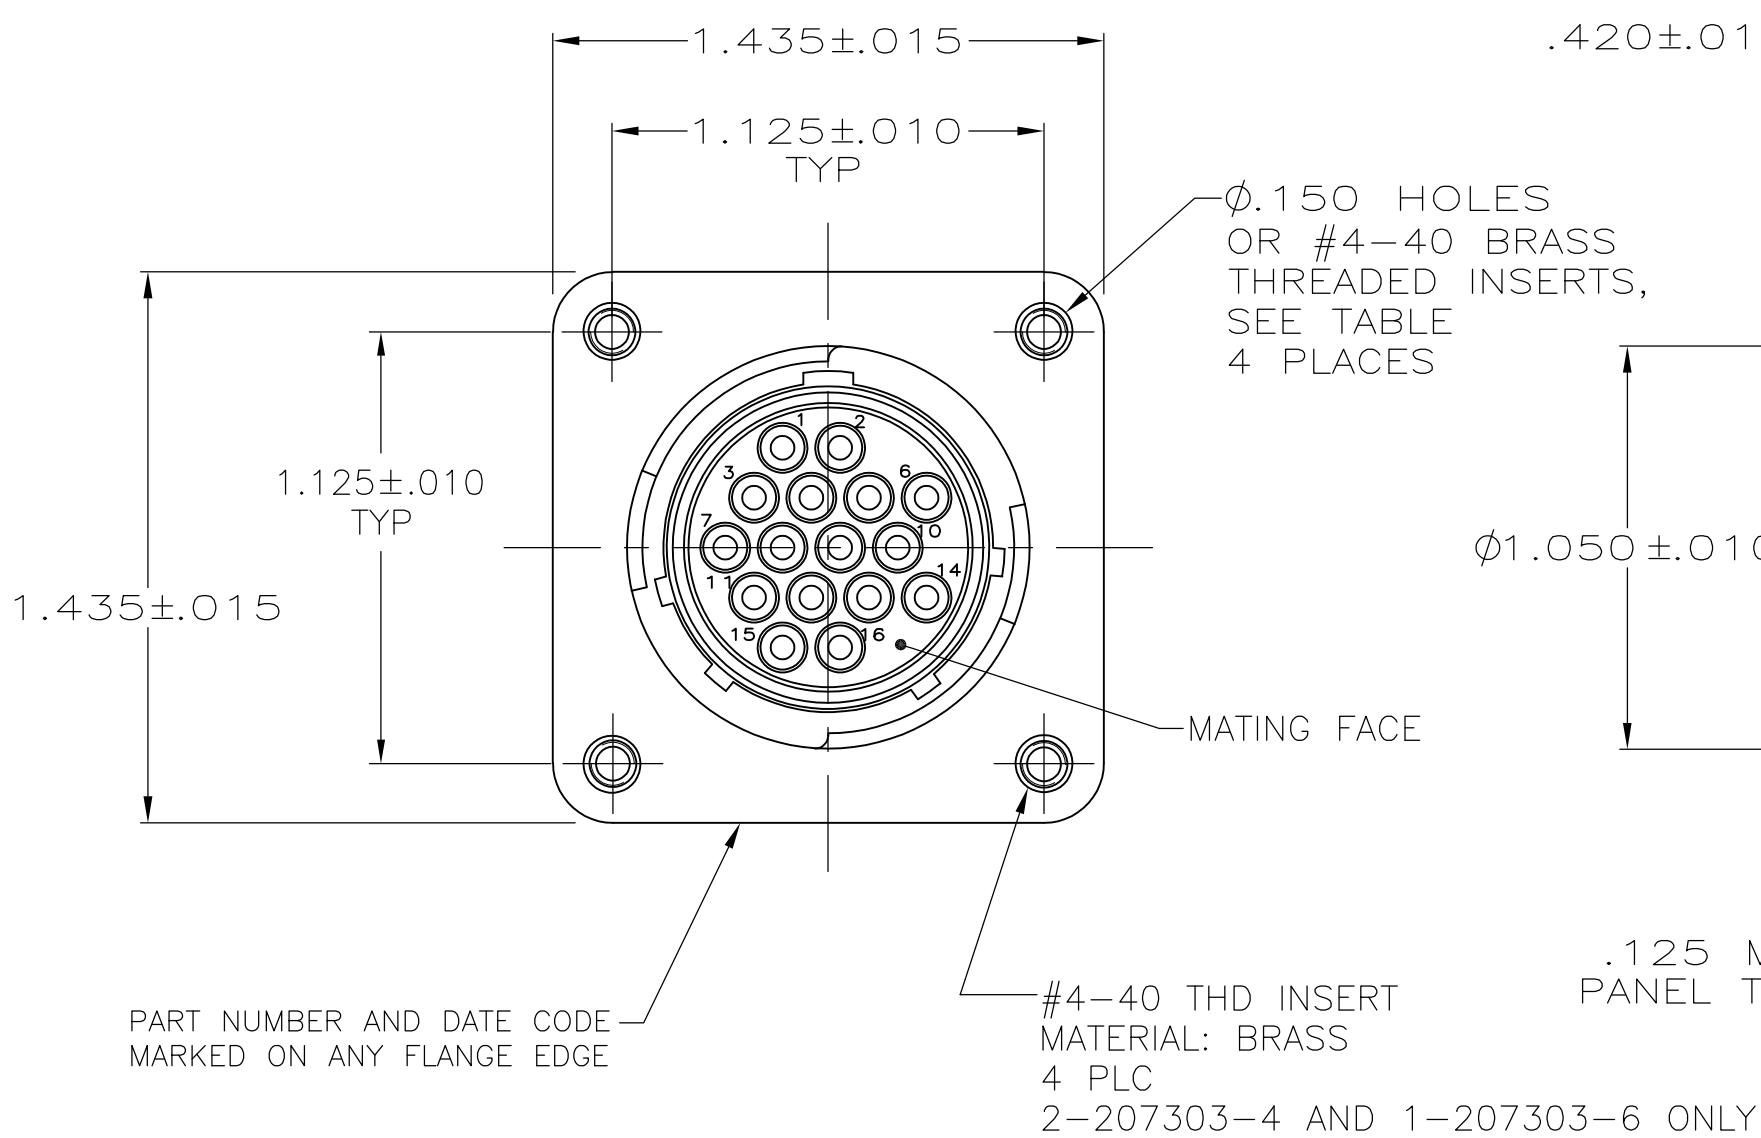


POST ARRANGEMENT ON REAR FACE

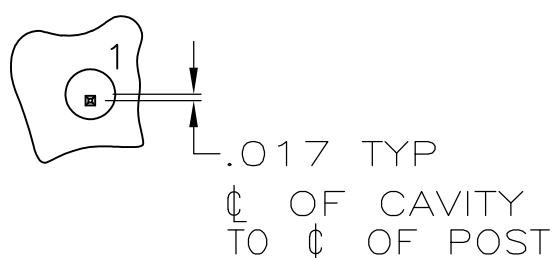

- 1 CONNECTOR WILL ACCEPT POSTED TYPE III+ PIN CONTACTS.
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 3 .000030 MIN PRECIOUS METAL PLATE ON MATING END FOR A LENGTH OF .200 MIN OVER .000050 MIN NICKEL PLATE. GOLD FLASH ALL OVER. CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042, BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENTAL APPLICATIONS.)

OBSOLETE	NO	YES	TIN	3	.130	1-207303-7
	NO	YES	TIN	3	.119	1-207303-6
	NO	NO	TIN	TIN	.220	1-207303-5
	NO	YES	TIN	3	.220	1-207303-4
	NO	NO	TIN	3	.220	1-207303-3
OBSOLETE	YES	NO	TIN-LEAD	3	.220	1-207303-2
	NO	YES	TIN-LEAD	GOLD	.220	1-207303-1
	NO	NO	TIN-LEAD	3	.220	207303-3
	NO	NO	TIN-LEAD	TIN	.220	207303-1
PERIPHERAL SEAL	THREADED INSERTS	CONTACT POST FINISH	CONTACT BODY FINISH	A	PART NUMBER	

RECOMMENDED P.C. BOARD LAYOUT
BOTTOM NON-COMPONENT SIDE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.LEE BG 7-2-91	 TE Connectivity				
		CHK W.G.LENKER 4-14-92					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD —	NAME RECEPTACLE ASSEMBLY, POSTED, STD SEX, SERIES 1, 17-16, CPC				
	0 PLC ± —	PRODUCT SPEC 108-10024					
	1 PLC ± —	APPLICATION SPEC					
	2 PLC ± —	—					
	3 PLC ± .005	—					
4 PLC ± —	ANGLES ± 2°	WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C-207303	RESTRICTED TO —	
MATERIAL SEE CALLOUT	FINISH SEE TABLE	CUSTOMER DRAWING			SCALE 2:1	SHEET 1 of 1	REV V