

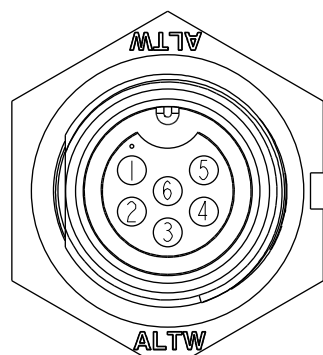
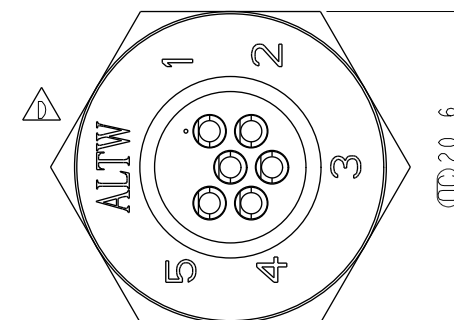
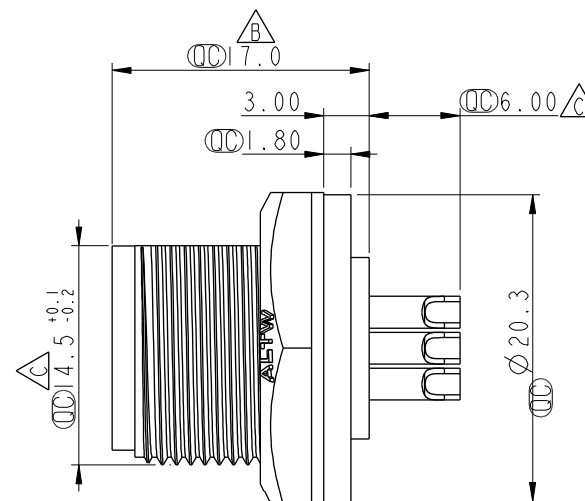
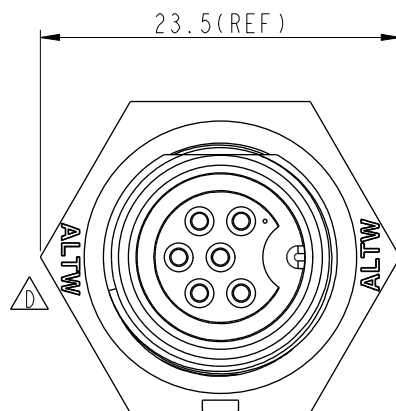


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LE3-870043	2007/11/05	Tina	Change To Pin Hole
D	LEN1660758	2016/06/08	Ruru	Change Logo
E	C190273	2019/02/23	Ruru	Modify Note




Pin Assignments

Front View



Recommended Panel Cut-out

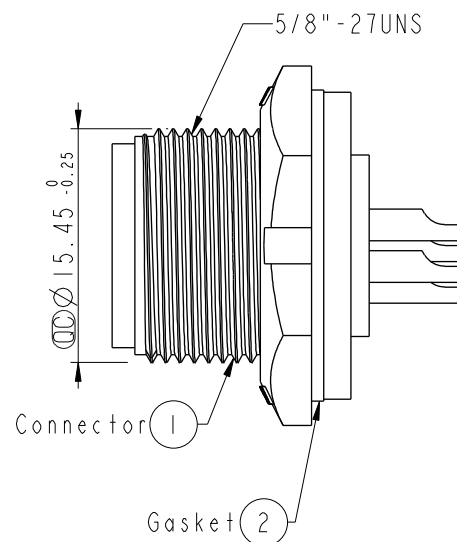

Note: $\triangle E$

- *  Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black
- *  Use With Waterproof Cap Or Dust Cap
For Panel Thickness Max: 3.0mm
- *  Use Without Waterproof Cap Or Dust Cap
For Panel Thickness Max: 4.0mm
- * Gasket and Nut are packed separately
in PE bags.

UNIT:mm				TITLE Standard Panel Lock 6Pin M Conn F Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BD-06PMFS-SC7001		DRAWN BY Ruru		DATE 2019-02-23				
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SCALE 2:1		SIZE A4			SHEET 1 OF 1		DWG NO BD-06PMFS-SC7001		CHECKED BY Rita		DATE 2019-02-23		
REV. E				WC-REV. A.3		(QC): Inspection item			CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-23				