
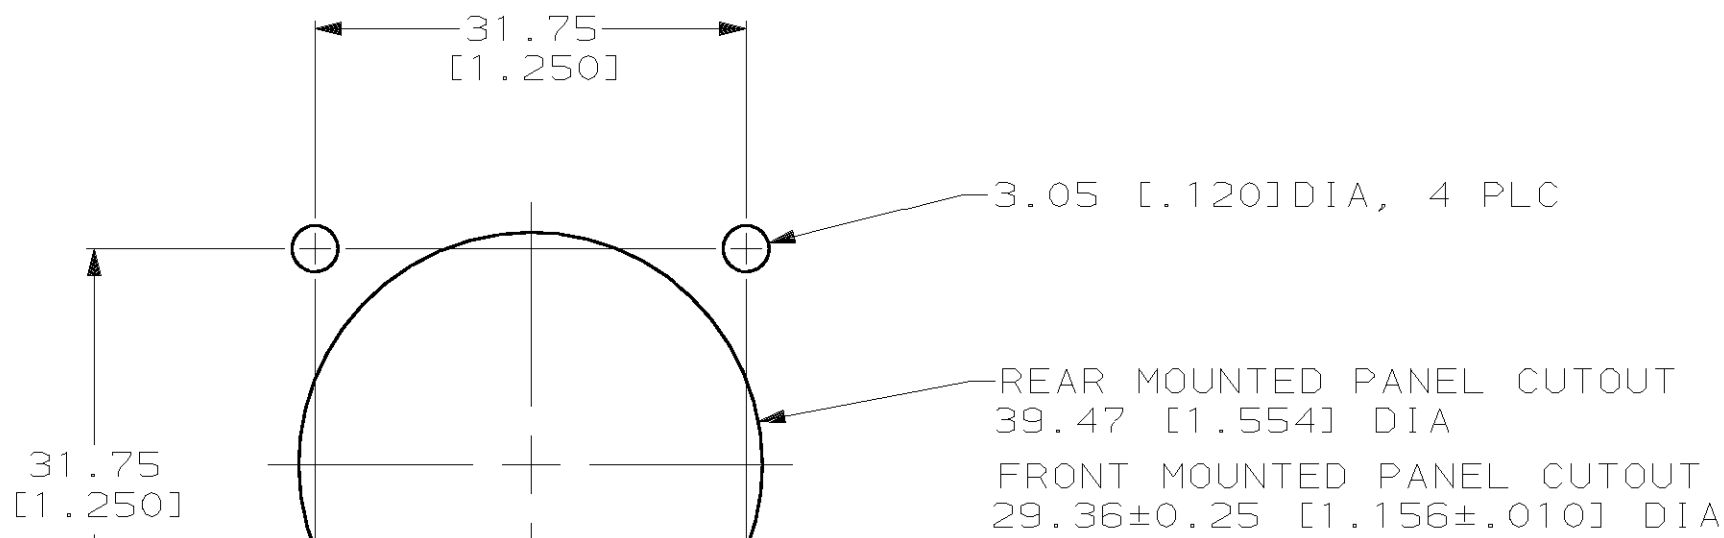
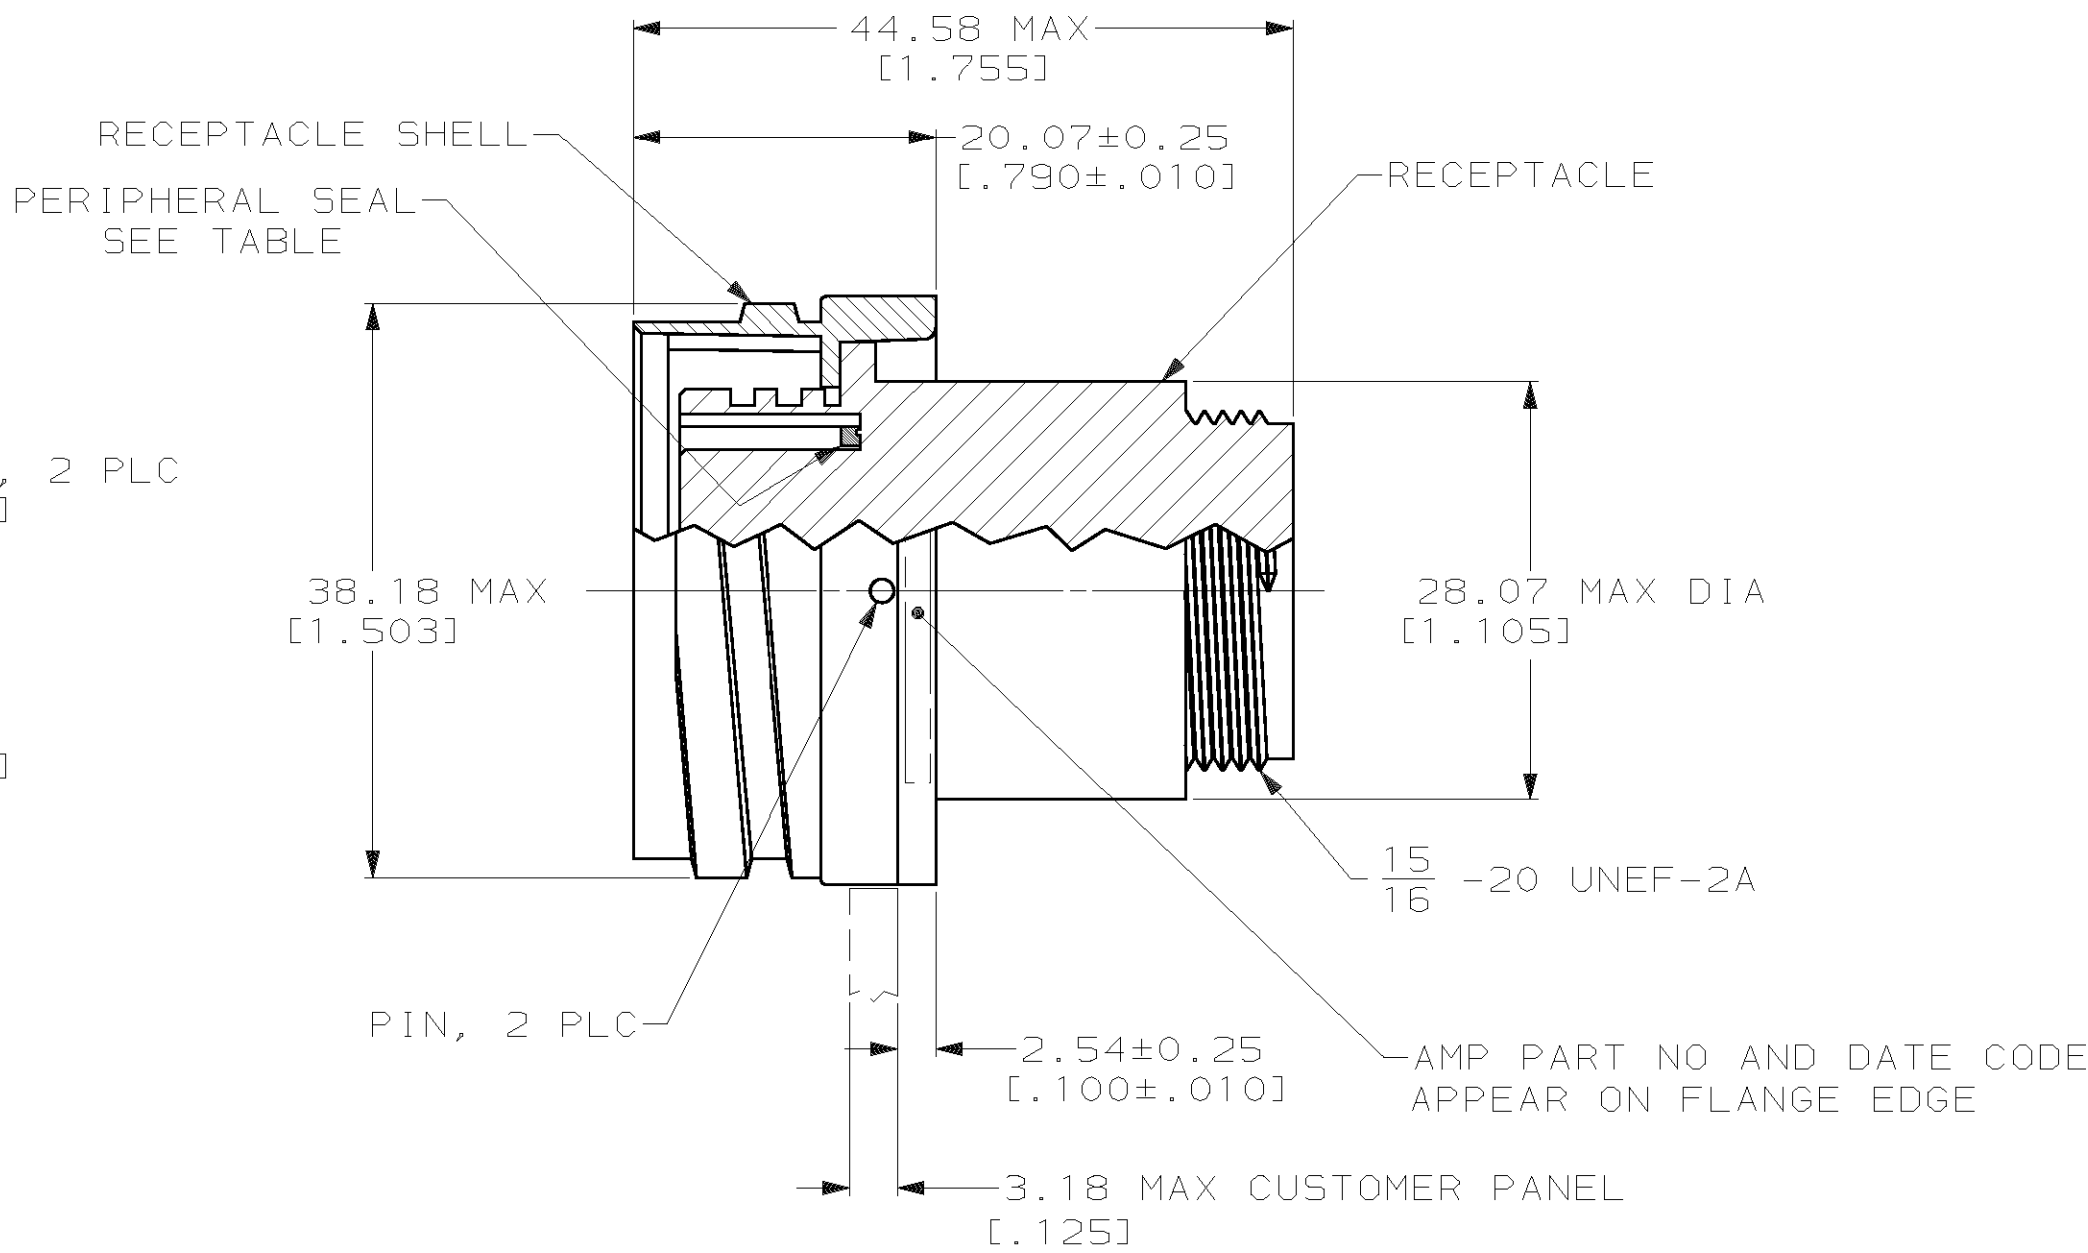


LOC	DIST	P	F	REVISIONS		
				ZONE	LTR	DESCRIPTION
FT	4				G	REDRAW ON CAD
					H	OBS -1 PER EC 0020-0394-93
					J	REACTIVATE -1
						PER EC 0G1C-0002-99
						DATE
						APPD

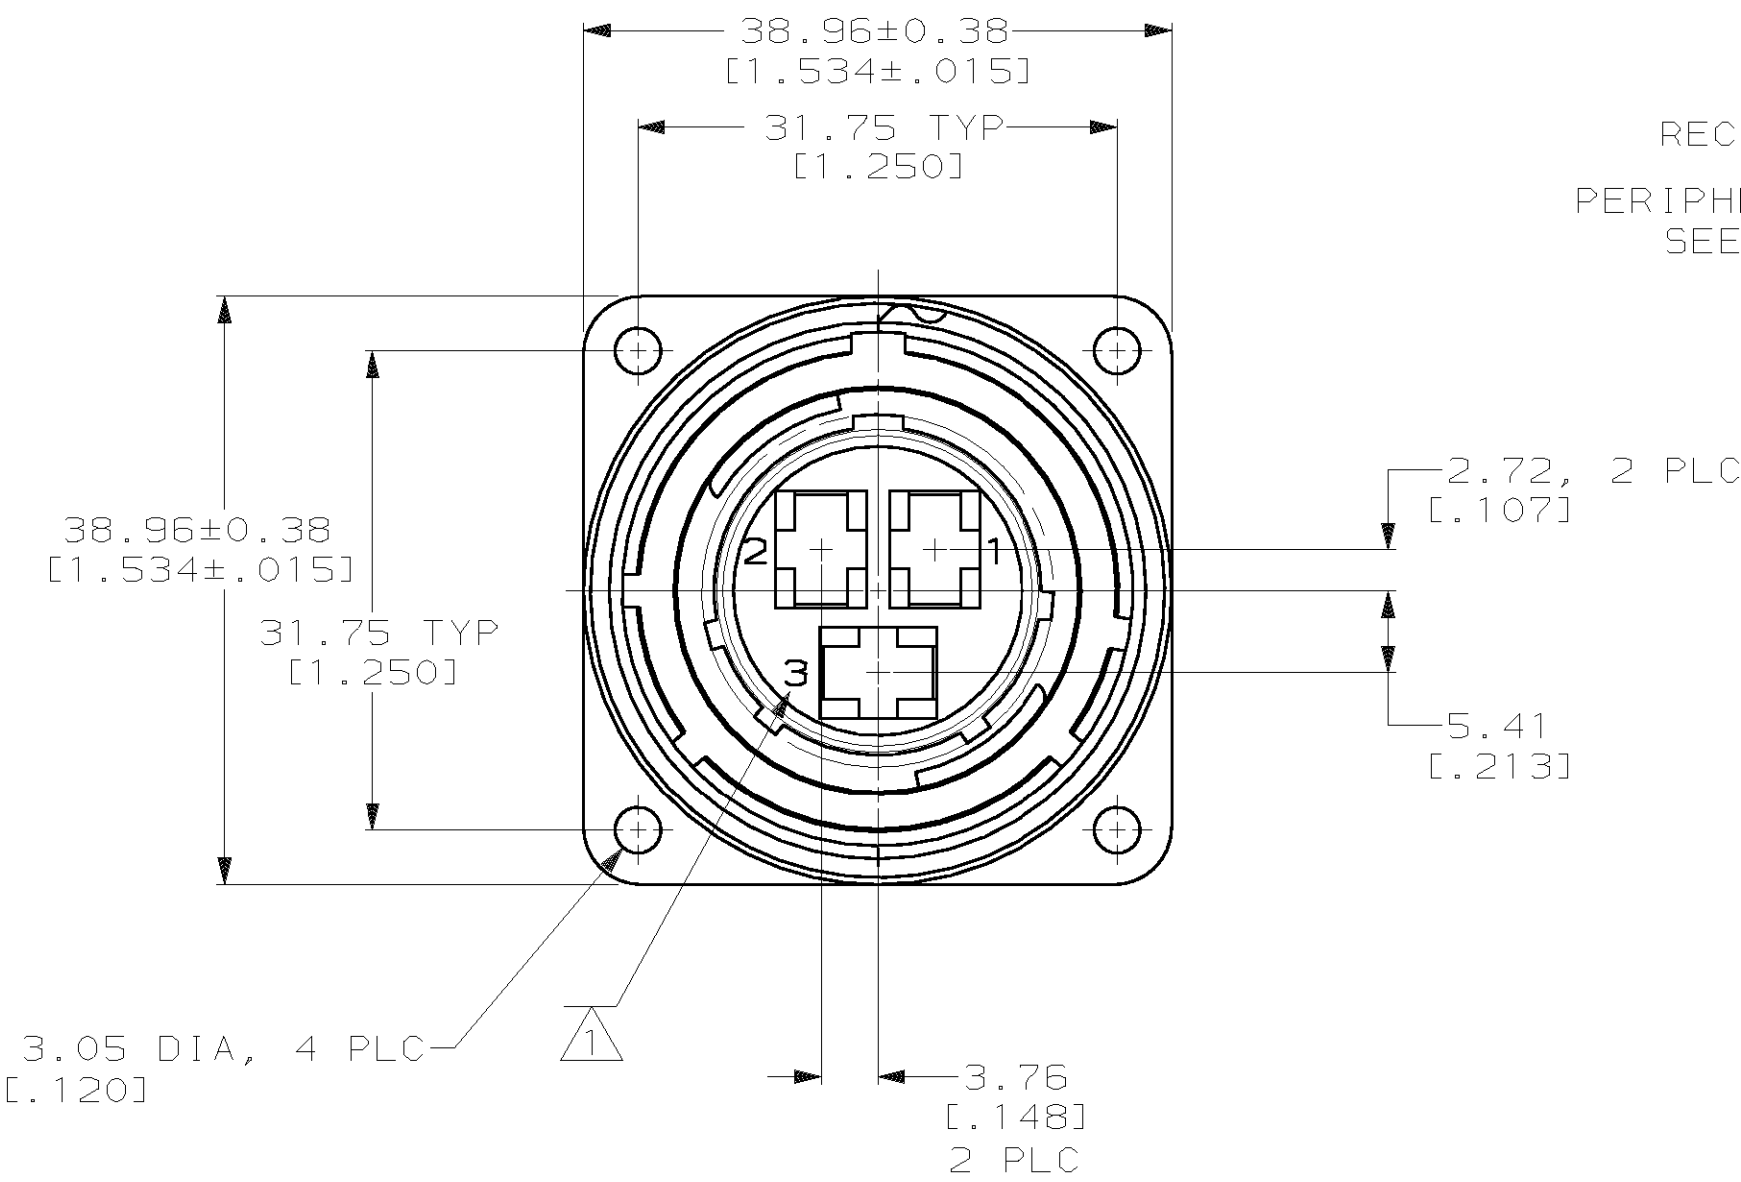

RECOMMENDED PANEL CUTOUT

- 1 CAVITY IDENTIFICATION CHARACTERS ON FRONT AND REAR FACE.
- 2. RECEPTACLE WILL ACCEPT 3 TYPE XII SOCKET CONTACTS.
- 3 5.08µm [1.000200] MIN NICKEL OVER 10.16µm [1.000400] MIN COPPER.

YES	208497-2
NO	208497-1
PERIPHERAL SEAL	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13[.005] 3 PLC DEC ± - ANGLES ± -	DR 1-29-92 W.G.LENKER	AMP AMP Incorporated Harrisburg, PA 17105-3608			
	CHK 2-11-92 R.STONE				
	APPD 2-12-92 K.BEAVER	NAME			
MATERIAL RECEPTACLE: NYLON, BLACK RCPT SHELL: ZINC PERIP SEAL: ELASTOMER, GREY PIN: CARBON STEEL	APPD 2-12-92 C.ROHDE	RECEPTACLE ASSEMBLY, 22-3, REV SEX, CMC			
	PRODUCT SPEC -				
FINISH RCPT SHELL:  PIN: NICKEL PLATED	APPLICATION SPEC -	SIZE 	CAGE CODE 00779	DRAWING NO 208497	
	WEIGHT -	SCALE 2:1		SHEET 1 OF 1	