


ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 42979	04/19	GPF

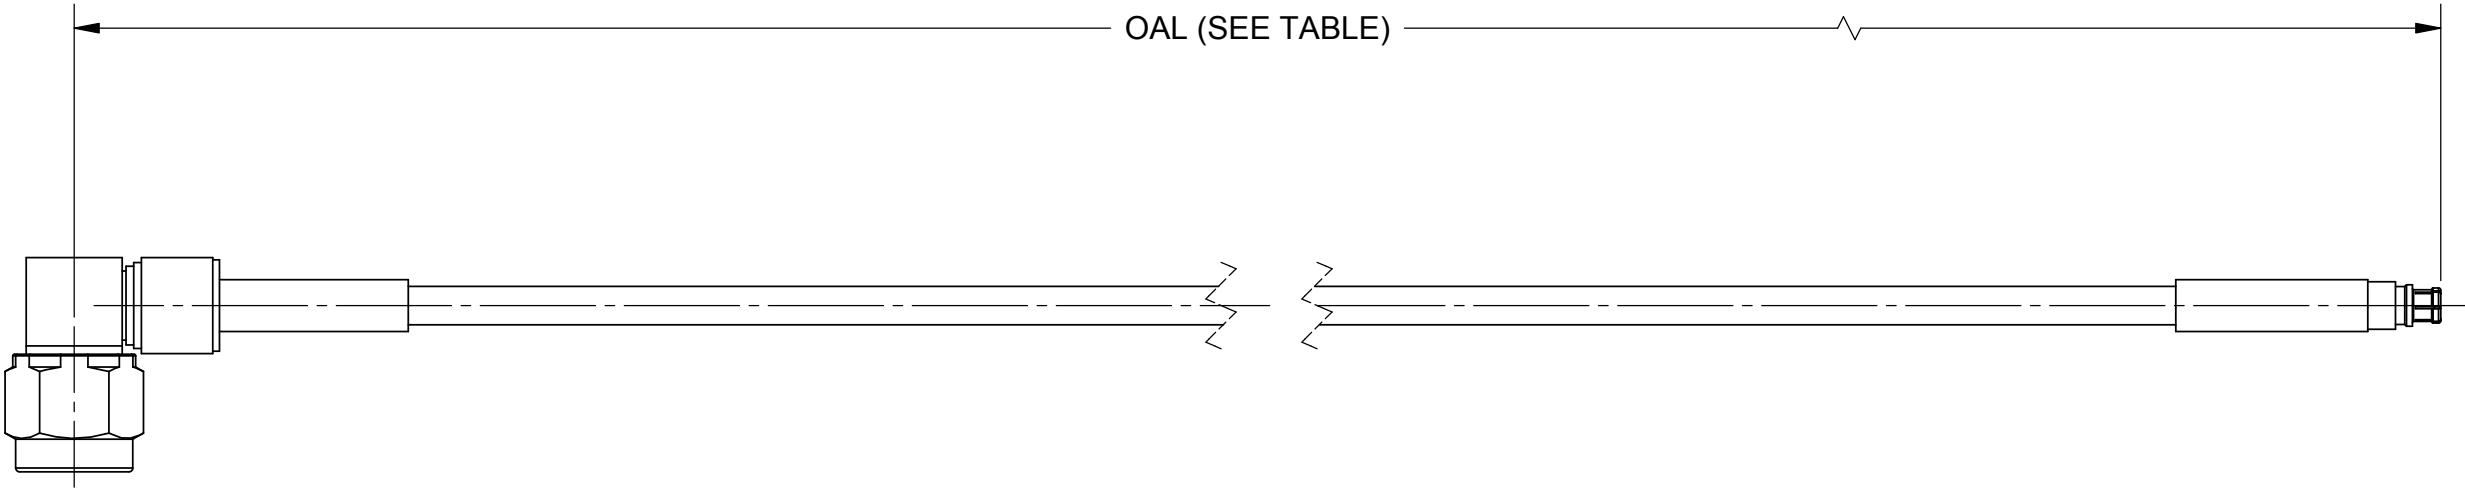

MATERIAL:

CONNECTORS: SMA R/A PLUG (SF2915-6605)

SMPM JACK (3221-40006)

CABLE: T-FLEX 405

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

SV P/N	OAL
7029-3246	6.000
7029-3247	12.000

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: $X^{\circ} \pm 1^{\circ}0'$ <div>$X'' \pm 15'$</div> DECIMAL: $.X \pm .030$ <div>$.XX \pm .010$</div> <div>$.XXX \pm .005$</div> INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63 " MIL-STD-10. 6) DIA 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	<div><div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div></div><div></div></div><div><div></div><div></div></div></div><div>SV<div>Amphenol MICROWAVE</div></div><div>2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409</div></div>			
FINISH:	SEE NOTES			TITLE:	SMA R/A PLUG TO SMPM JACK FOR T-FLEX 405 CABLE ASSEMBLY		
SURFACE AREA:	N/A			SIZE	CAGE CODE	DWG. NO.	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.				B	95077	7029-3246-3247	
THIRD ANGLE PROJECTION <div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div></div><div></div></div><div><div></div><div></div></div></div>		DRAWN:	SJ 04/01/19				
		CHECKED:	GPF 04/01/19				
		APPROVED:	GPF 04/01/19				
		SCALE: 2:1			SHEET 1 OF 1		