


NOTE 2

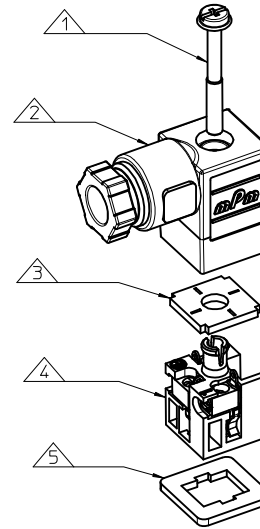

ITEM	DESCRIPTION
1	SCREW
2	COVER ASSEMBLY
3	PCB
4	INSERT ASSEMBLY
5	GASKET

S19207TA022**






SERIES
S19= INTERNAL THREAD FORM C MICRO
POLES
2= 2 POLE & 3= 3 POLE
THREAD
07= PG7, M2= M12x1.5
MATERIAL AND HOUSING COLOUR
G= PA6 GRAY, N= PA6 BLACK, W= PA6 BLACK V0,
T= PA12 TRANSPARENT, B= PA6 WHITE
CIRCUIT
SEE DETAILS IN CATALOGUE
VOLTAGE
SEE DETAILS IN CATALOGUE
SCREW AND GASKET
1= NBR PROFILE GASKET & SCREW
2= NBR FLAT GASKET & SCREW
3= WHITE SILICON PROFILE GASKET & SCREW
4= WHITE SILICON FLAT GASKET & SCREW
A= NBR PROFILE GASKET & SCREW +2mm
B= NBR FLAT GASKET & SCREW +2mm
NON STANDARD COMPONENTS
14= PACKED IN NEUTRAL BAG
5N= PACKED IN BOXES OF 200

NOTES


- PLEASE SEE SHEET 2 FOR CURRENTLY CONFIGURED PART NUMBERS.
FOR SPECIFIC PART NUMBERS PLEASE CONTACT SALES OR CONSULT
THE INTELLIGENT PART NUMBERS IN THE TABLE ATTACHED.
- EARTH POSITION SHOWN, H6.
- FOR PACKAGING SEE PACKAGING SPEC PK 121065-S19
- PRODUCT SPEC: SEE PS-121201-001

LAST INSPECTION NUMBER 2

REMOVED PART NO: EC NO: IPG2014-1527 DRAWN: KNOXMOYLE 2014/02/26 CHKD: OSHEA 2014/03/06 APPR: STGRiffin 2014/04/01	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY JOCONNOR	DATE 2011/05/18	TITLE S19 SERIES INTERNAL THREAD  MOLEX INCORPORATED		
			4 PLACES	± ---	± ---	CHECKED BY DMAHER	DATE 2011/05/18			
			3 PLACES	± ---	± ---	APPROVED BY EFOLAN	DATE 2011/06/07			
			2 PLACES	± 0.10	± ---	MATERIAL NO.	DOCUMENT NO.			
			1 PLACE	± 0.20	± ---	ANGULAR ± 2 °			SHEET NO. 1 OF 2	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE SHEET 2		SD-121064-003		
REV			SIZE A2			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

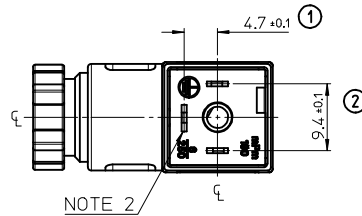

NOTE 2

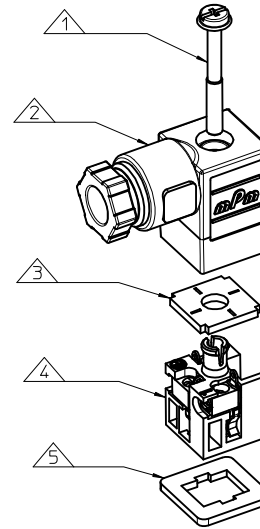

ITEM	DESCRIPTION
1	SCREW
2	COVER ASSEMBLY
3	PCB
4	INSERT ASSEMBLY
5	GASKET

S19207TA022**

SERIES
S19= INTERNAL THREAD FORM C MICRO
POLES
2= 2 POLE & 3= 3 POLE
THREAD
07= PG7, M2= M12x1.5
MATERIAL AND HOUSING COLOUR
G= PA6 GRAY, N= PA6 BLACK, W= PA6 BLACK V0,
T= PA12 TRANSPARENT, B= PA6 WHITE
CIRCUIT
SEE DETAILS IN CATALOGUE
VOLTAGE
SEE DETAILS IN CATALOGUE
SCREW AND GASKET
1= NBR PROFILE GASKET & SCREW
2= NBR FLAT GASKET & SCREW
3= WHITE SILICON PROFILE GASKET & SCREW
4= WHITE SILICON FLAT GASKET & SCREW
A= NBR PROFILE GASKET & SCREW +2mm
B= NBR FLAT GASKET & SCREW +2mm
NON STANDARD COMPONENTS
14= PACKED IN NEUTRAL BAG
5N= PACKED IN BOXES OF 200

NOTES

- PLEASE SEE SHEET 2 FOR CURRENTLY CONFIGURED PART NUMBERS.
FOR SPECIFIC PART NUMBERS PLEASE CONTACT SALES OR CONSULT
THE INTELLIGENT PART NUMBERS IN THE TABLE ATTACHED.
- EARTH POSITION SHOWN, H6.
- FOR PACKAGING SEE PACKAGING SPEC PK 121065-S19
- PRODUCT SPEC: SEE PS-121201-001

LAST INSPECTION NUMBER 2

REMOVED PART NO: EC NO: IPG2014-1527 DRAWN: KNOXMOYLE 2014/02/26 CHKD: OSHEA 2014/03/06 APPR: STGRiffin 2014/04/01	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY JOCONNOR	DATE 2011/05/18	TITLE S19 SERIES INTERNAL THREAD  MOLEX INCORPORATED	
			4 PLACES	± ---	± ---	CHECKED BY DMAHER	DATE 2011/05/18		
			3 PLACES	± ---	± ---	APPROVED BY EFOLAN	DATE 2011/06/07		
			2 PLACES	± 0.10	± ---	MATERIAL NO.	DOCUMENT NO.		
	1 PLACE	± 0.20	± ---	ANGULAR ± 2 °		SD-121064-003		SHEET NO. 1 OF 2	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2				
REV					SIZE A2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

