

# HiPerFET™


## Power MOSFETs

### Q-Class

IXFE 44N50Q  
IXFE 48N50Q

N-Channel Enhancement Mode  
Avalanche Rated, Low  $Q_g$ , High  $dv/dt$

#### Preliminary data sheet




| Symbol     | Test Conditions                                                                                                                         | Maximum Ratings          |                        |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------|
| $V_{DSS}$  | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$                                                                                         | 500                      | V                      |
| $V_{DGR}$  | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GS} = 1\text{ M}\Omega$                                                           | 500                      | V                      |
| $V_{GS}$   | Continuous                                                                                                                              | $\pm 20$                 | V                      |
| $V_{GSM}$  | Transient                                                                                                                               | $\pm 30$                 | V                      |
| $I_{D25}$  | $T_C = 25^\circ\text{C}$                                                                                                                | 44N50Q 39<br>48N50Q 41   | A                      |
| $I_{DM}$   | $T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$                                                                              | 44N50Q 176<br>48N50Q 192 | A                      |
| $I_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                                | 48                       | A                      |
| $E_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                                | 60                       | mJ                     |
| $E_{AS}$   |                                                                                                                                         | 2.5                      | mJ                     |
| $dv/dt$    | $I_S \leq I_{DM}$ , $di/dt \leq 100\text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ ,<br>$T_J \leq 150^\circ\text{C}$ , $R_G = 2\ \Omega$ | 15                       | V/ns                   |
| $P_D$      | $T_C = 25^\circ\text{C}$                                                                                                                | 400                      | W                      |
| $T_J$      |                                                                                                                                         | -40 to +150              | $^\circ\text{C}$       |
| $T_{JM}$   |                                                                                                                                         | 150                      | $^\circ\text{C}$       |
| $T_{stg}$  |                                                                                                                                         | -40 to +150              | $^\circ\text{C}$       |
| $V_{ISOL}$ | 50/60 Hz, RMS $t = 1\text{ min}$<br>$I_{ISOL} \leq 1\text{ mA}$ $t = 1\text{ s}$                                                        | 2500<br>3000             | V~<br>V~               |
| $M_d$      | Mounting torque<br>Terminal connection torque                                                                                           | 1.5/13<br>1.5/13         | Nm/lb.in.<br>Nm/lb.in. |
| Weight     |                                                                                                                                         | 19                       | g                      |

| Symbol       | Test Conditions                                | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                                  |
|--------------|------------------------------------------------|-----------------------------------------------------------------------------------|------|----------------------------------|
|              |                                                | min.                                                                              | typ. | max.                             |
| $V_{DSS}$    | $V_{GS} = 0\text{ V}$ , $I_D = 1\text{ mA}$    | 500                                                                               |      | V                                |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 4\text{ mA}$        | 2.0                                                                               |      | 4.0 V                            |
| $I_{GSS}$    | $V_{GS} = \pm 20\text{ V}_{DC}$ , $V_{DS} = 0$ |                                                                                   |      | $\pm 100\text{ nA}$              |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$<br>$V_{GS} = 0\text{ V}$    | $T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$                             |      | 100 $\mu\text{A}$<br>2 mA        |
| $R_{DS(on)}$ | $V_{GS} = 10\text{ V}$ , $I_D = I_T$           | 44N50Q<br>48N50Q                                                                  |      | 120 m $\Omega$<br>110 m $\Omega$ |
| Notes 1, 2   |                                                |                                                                                   |      |                                  |

|           |           |                |
|-----------|-----------|----------------|
| $V_{DSS}$ | $I_{D25}$ | $R_{DS(on)}$   |
| 500 V     | 39 A      | 120 m $\Omega$ |
| 500 V     | 41 A      | 110 m $\Omega$ |

$t_{rr} \leq 250\text{ ns}$

#### ISOPLUS 227™ (IXFE)



G = Gate  
S = Source  
D = Drain

Either Source terminal at miniBLOC can be used as Main or Kelvin Source

#### Features

- Conforms to SOT-227B outline
- Low  $R_{DS(on)}$  HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
- Fast intrinsic Rectifier

#### Applications

- DC-DC converters
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls

#### Advantages

- Low cost
- Easy to mount
- Space savings
- High power density


| Symbol       | Test Conditions                                                                                  | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |      |
|--------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|------|
|              |                                                                                                  | min.                                                                              | typ. | max. |
| $g_{fs}$     | $V_{DS} = 20\text{ V}; I_D = I_T$ , Notes 1, 2                                                   | 30                                                                                | 42   | S    |
| $C_{iss}$    | $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$                                    |                                                                                   | 7000 | pF   |
| $C_{oss}$    |                                                                                                  |                                                                                   | 960  | pF   |
| $C_{rss}$    |                                                                                                  |                                                                                   | 230  | pF   |
| $t_{d(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = I_T$<br>$R_G = 4.7\ \Omega$ (External), |                                                                                   | 33   | ns   |
| $t_r$        |                                                                                                  |                                                                                   | 22   | ns   |
| $t_{d(off)}$ |                                                                                                  |                                                                                   | 75   | ns   |
| $t_f$        |                                                                                                  |                                                                                   | 10   | ns   |
| $Q_{g(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = I_T$                                    |                                                                                   | 190  | nC   |
| $Q_{gs}$     |                                                                                                  |                                                                                   | 40   | nC   |
| $Q_{gd}$     |                                                                                                  |                                                                                   | 86   | nC   |
| $R_{thJC}$   |                                                                                                  |                                                                                   | 0.31 | K/W  |
| $R_{thCK}$   |                                                                                                  |                                                                                   | 0.07 | K/W  |

**Source-Drain Diode**

| Symbol   | Test Conditions                                                            | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |               |
|----------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------------|
|          |                                                                            | min.                                                                              | typ. | max.          |
| $I_S$    | $V_{GS} = 0\text{ V}$                                                      |                                                                                   |      | 48 A          |
| $I_{SM}$ | Repetitive; pulse width limited by $T_{JM}$                                |                                                                                   |      | 192 A         |
| $V_{SD}$ | $I_F = I_S, V_{GS} = 0\text{ V}$ ,<br>Note:1                               |                                                                                   |      | 1.5 V         |
| $t_{rr}$ | $I_F = 25\text{ A}, -di/dt = 100\text{ A}/\mu\text{s}, V_R = 100\text{ V}$ |                                                                                   | 1.0  | 250 ns        |
| $Q_{RM}$ |                                                                            |                                                                                   |      | $\mu\text{C}$ |
| $I_{RM}$ |                                                                            |                                                                                   |      | A             |

Note: 1. Pulse test,  $t \leq 300\ \mu\text{s}$ , duty cycle  $d \leq 2\%$

2.  $I_T$  Test current:  
 44N50Q:  $I_T = 22\text{ A}$   
 48N50Q:  $I_T = 24\text{ A}$

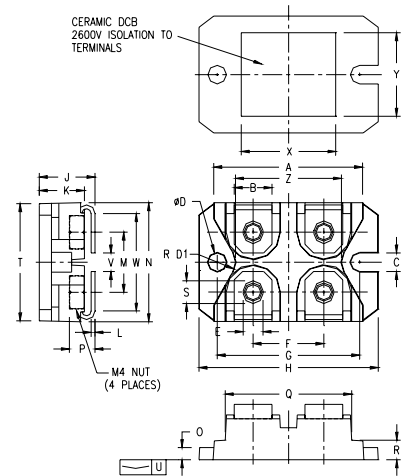**ISOPLUS-227 B**


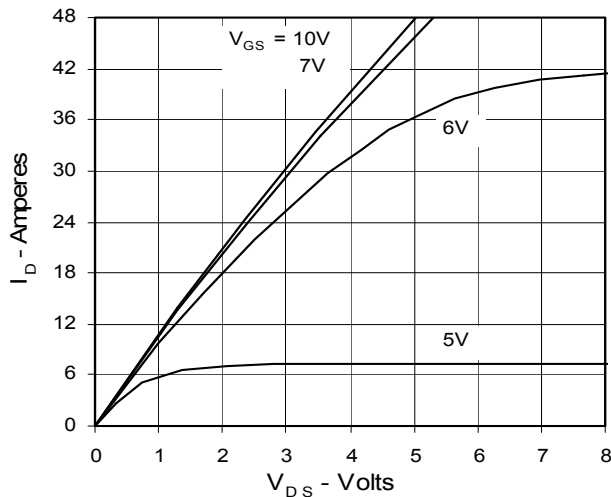
| SYM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 1.240  | 1.270 | 31.50       | 32.26 |
| B   | .310   | .330  | 7.87        | 8.38  |
| C   | .155   | .165  | 3.94        | 4.19  |
| D   | .155   | .165  | 3.94        | 4.19  |
| D1  | .150   | .157  | 3.81        | 3.98  |
| E   | .160   | .168  | 4.06        | 4.27  |
| F   | .587   | .595  | 14.91       | 15.11 |
| G   | 1.186  | 1.193 | 30.12       | 30.30 |
| H   | 1.489  | 1.505 | 37.80       | 38.23 |
| J   | .465   | .481  | 11.81       | 12.22 |
| K   | .370   | .380  | 9.40        | 9.65  |
| L   | .030   | .033  | 0.76        | 0.84  |
| M   | .496   | .506  | 12.60       | 12.85 |
| N   | .990   | 1.001 | 25.15       | 25.42 |
| O   | .100   | .105  | 2.54        | 2.67  |
| P   | .195   | .235  | 4.95        | 5.97  |
| Q   | 1.045  | 1.059 | 26.54       | 26.90 |
| R   | .160   | .170  | 4.06        | 4.32  |
| S   | .186   | .191  | 4.72        | 4.85  |
| T   | .968   | .987  | 24.59       | 25.07 |
| U   | -.001  | .002  | -0.03       | 0.05  |
| V   | .130   | .160  | 3.30        | 4.06  |
| W   | .780   | .830  | 19.81       | 21.08 |
| X   | .770   | .810  | 19.56       | 20.57 |
| Y   | .680   | .720  | 17.27       | 18.29 |
| Z   | .885   | .892  | 22.48       | 22.66 |

IXYS reserves the right to change limits, test conditions, and dimensions.


IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1  
 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343


**Fig. 1. Output Characteristics  
@ 25 Deg. C**




**Fig. 2. Extended Output Characteristics  
@ 25 deg. C**

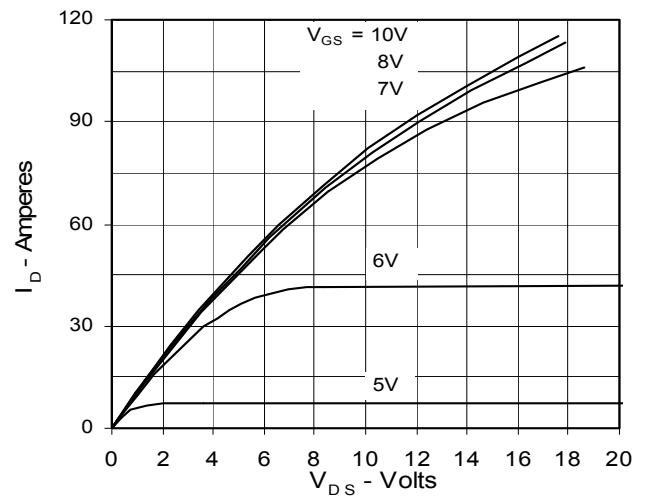


**Fig. 3. Output Characteristics  
@ 125 Deg. C**

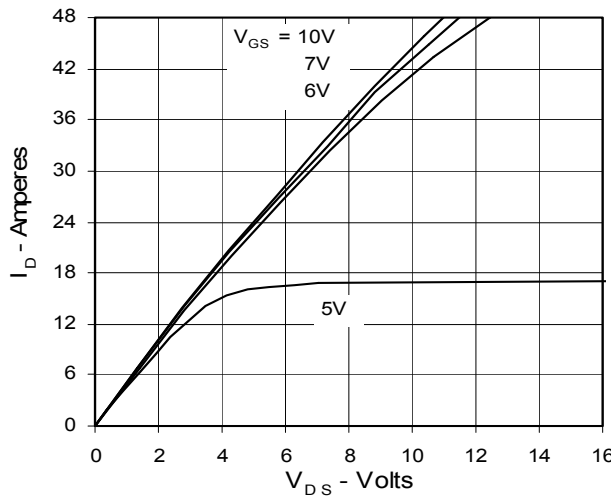

**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_{D25}$  Value vs.  
Junction Temperature**

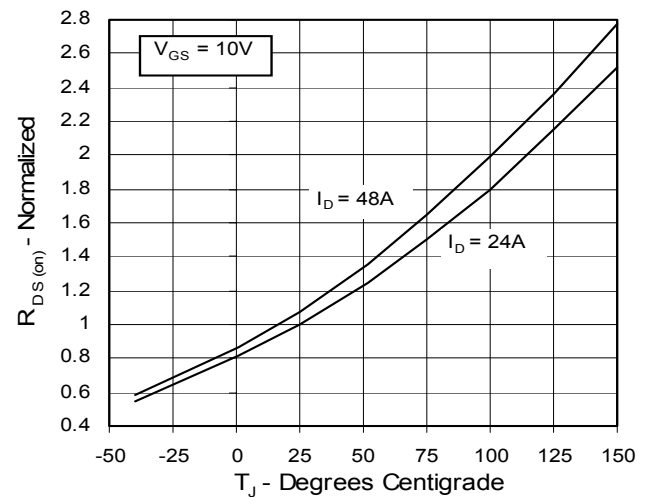

**Fig. 5.  $R_{DS(on)}$  Normalized to  $I_{D25}$   
Value vs.  $I_D$**

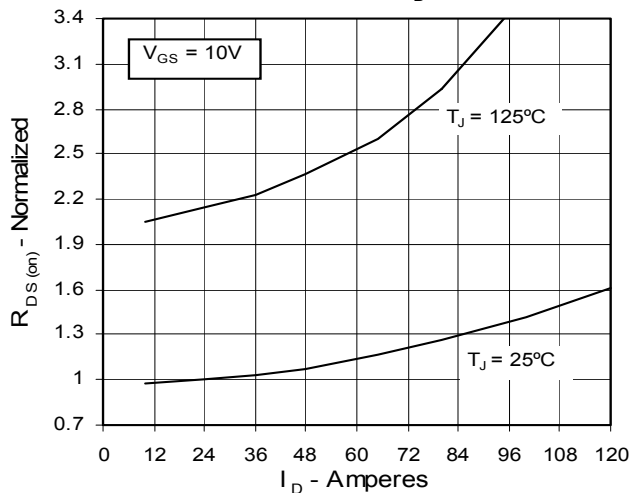

**Fig. 6. Drain Current vs. Case  
Temperature**

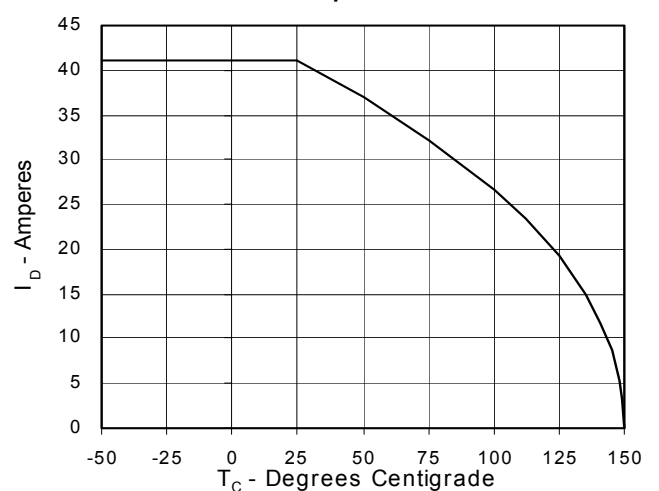


Fig. 7. Input Admittance

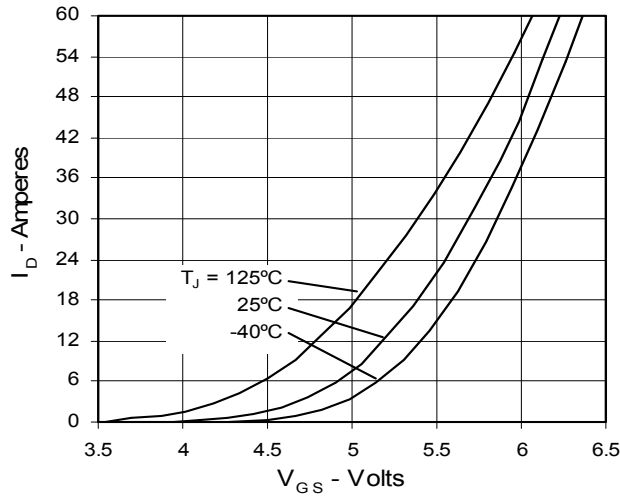


Fig. 8. Transconductance

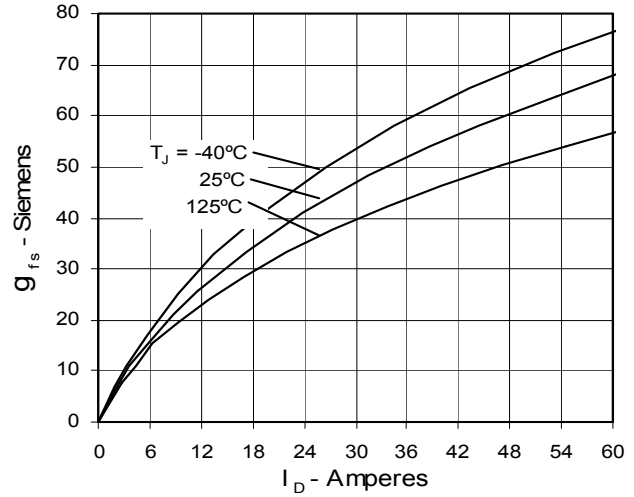


Fig. 9. Source Current vs. Source-To-Drain Voltage

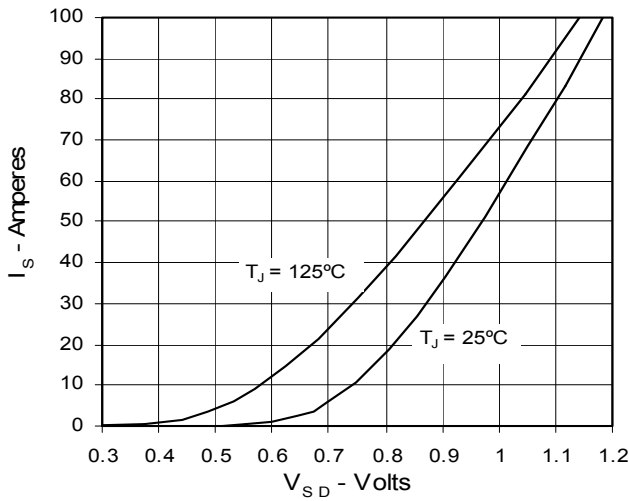


Fig. 10. Gate Charge

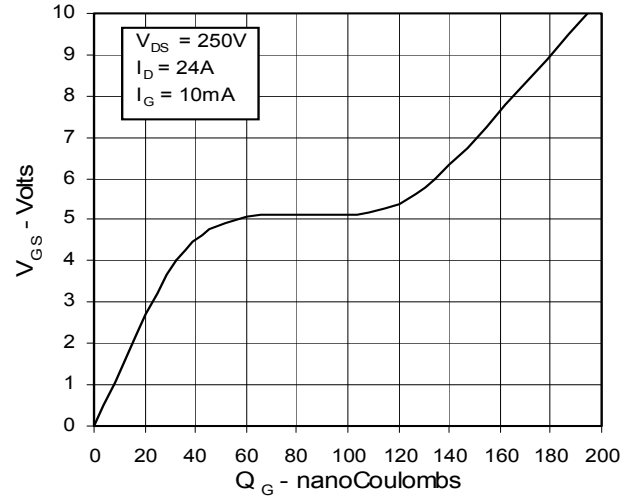


Fig. 11. Capacitance


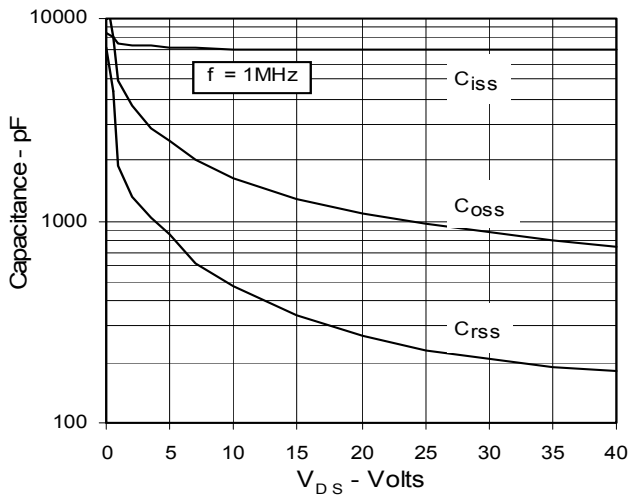


Fig. 12. Maximum Transient Thermal Resistance

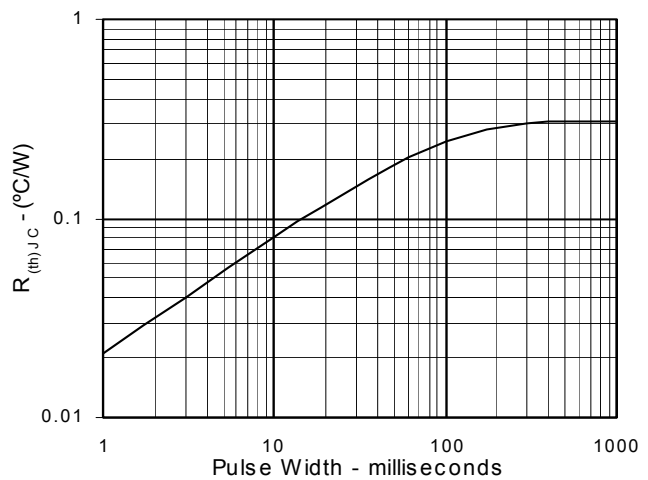

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1  
4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[IXFE48N50Q](#) [IXFE44N50Q](#)