

3M™ Multi-Touch Display M1866PW

Sophistication Meets Innovation

The 18.5-inch **3M™ Multi-Touch Display M1866PW** takes interactive display technology to the next level by combining uncompromising multi-touch performance, brilliant high-definition graphics, wide viewing angles and elegant product design into a fully-integrated, easy-to-use, plug-and-play multi-touch desktop device.

Inspired by the industrial design influence of modern consumer devices, the M1866PW display features a stylish flat front surface design that makes it an attractive addition to any professional or retail environment. Beyond contemporary aesthetics, the M1866PW display is designed to meet the unique demands of multi-touch use by featuring a 3M-proprietary anti-stiction surface treatment that allows a user's fingers to effortlessly glide across the screen. The display also features a sturdy and robust base that easily accommodates a full 90-degree position range for more viewing flexibility and while providing an inviting horizontal surface for multi-user on screen collaboration. With a standard 100mm x 100mm VESA mount, this display allows for versatile integration onto a wall, swinging arm or other open surfaces.

The M1866PW display features 3M's industry-leading Projected Capacitive (3M PCT) technology that exceeds the typical touch performance of popular smart phone and tablet devices by offering a high performance multi-touch experience. Recognizing up to 20 simultaneous touch events, each at a 6-millisecond response rate, the M1866PW display also recognizes and rejects the user's palms or arm resting on the screen to help prevent inadvertent touches. This incredible touch performance allows for a more natural user interaction that results in a truly inspired creative experience unrivaled by competitive touch displays.

Complementing the M1866PW display's stylish industrial design and exceptional multi-touch performance is an enhanced, high-definition LCD that displays dynamic, vivid and realistic images essential for creating high impact and engaging user applications. The M1866PW display is LED backlit which not only reduces power consumption, but also offers en-



Recommended Multi-Touch Applications

- Interactive Point-of-Purchase
- Virtual Concierge
- Assisted Selling
- Healthcare
- Trade Show/Convention
- Software Development
- Telepresence

hanced brightness, better contrast levels, and more consistent light output as compared to typical CCFL displays. The M1866PW display is able to maintain superior image quality even when viewed at off angles, due to its impressive 178 degree vertical and horizontal viewing angles.

By combining industry-leading multi-touch performance, vibrant high-definition graphics, and wide viewing angles with a fully integrated, industrial-design desktop device, the 3M Multi-Touch Display M1866PW clearly defines the next level of interactive touch displays. Sophistication has met innovation.

| Feature | Benefit |
|--|---|
| 3M PCT Multi-Touch Technology | <ul style="list-style-type: none">• 20-touch multi-touch performance for intuitive on-screen collaboration• Ultra-fast 6 ms touch response time for advanced multi-touch applications• Palm rejection creates natural user operation when using one or two hands• Superior touch accuracy (99% of true position) enables precise touch performance, even at display edge and corners |
| High Performance HD LCD with LED Backlight | <ul style="list-style-type: none">• Vivid realistic images with enhanced brightness and contrast levels creates high-impact on-screen interactive experience• Wide viewing angle for viewing flexibility while maintaining image quality• Provides improved power efficiency and reduced consumption |
| Sophisticated Flat Front Surface Design | <ul style="list-style-type: none">• Provides the elegant and modern aesthetics of popular portable consumer devices• Anti-stiction surface provides improved usability for multi-touch applications• Easy-to-clean surface without bezels• Eliminates dust and debris build up at the edge and corners of the display |



3M™ Multi-Touch Display M1866PW Specifications

Functional Specifications

Display Details

| | |
|-------------------------|--|
| LCD Technology | IPS (In Plane Switching) |
| Backlight | LED |
| Aspect Ratio | 16:9 |
| Display Colors | 16.7 Million |
| Pixel Pitch | 0.100 mm x 0.300 mm |
| Brightness | 250 cd/m2 (nit) (typical) |
| with touch sensor (1) | 217 cd/m2 (nit) |
| Contrast Ratio (2) | 1000:1 typical |
| Viewing Angle | Horizontal/Vertical: 178 degrees typical |
| Video Response Time (3) | 9 milliseconds (typical) |
| Control Type | OSD with capacitive buttons |
| Native Resolution | 1366 x 768 (HD) |

(1) Brightness measured on a display with 3M™ Projected Capacitive sensor

(2) Measured at a contrast ratio of 10.

(3) Gray to Gray

Touch Details

| | |
|--------------------------|----------------------------------|
| Number of Inputs | 20 inputs with palm rejection |
| Touch Point Speed | 6 ms |
| Input Type | Finger, Thin Glove |
| Touch Communication | USB |
| Operating System Support | Windows 8/7/Vista/XP, Linux, Mac |

Physical Specifications

Product Details

| | |
|-----------------------|--|
| Operating Environment | 0 to +40 degrees C Relative Humidity, non-condensing 90% |
| Storage Environment | -10 to +60 degrees C |
| Video Input | HDMI, VGA, Display Port |
| Multimedia | Audio input, 3 watt audio speaker |
| VESA Pattern | 100mm x 100mm |
| Power Supply | External, 110/220 VAC Power Supply |
| Power Consumption | 34.5 watts (maximum) |
| RoHS Compliant | Yes |
| Agency Approvals | FCC-B, CE, TUV, C-Tick |
| Warranty | 1 year on touch display |

Dimensions and Weight


| | |
|--------------------------------------|--|
| Physical (WxHxD) | 453 x 355 x 180 mm 17.8 x 13.9 x 7.1 inches |
| Display Area (WxH) (viewing area) | 409.8 x 230.4 mm 16.1 x 9.1 inches |
| Packaging (WxHxD) | 527 x 447 x 232 mm 20.7 x 17.6 x 9.1 inches |
| Display Weight | 4.9 Kg / 10.8 lbs |
| Packaging/Display Weight | 7.8 Kg / 17.2 lbs |

Ordering Information


| | |
|-------------|----------------|
| Part Number | 98-0003-3726-5 |
|-------------|----------------|



90-degrees of Adjustment

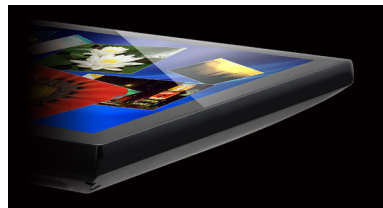

Flat Front Surface (Virtual Bezel)

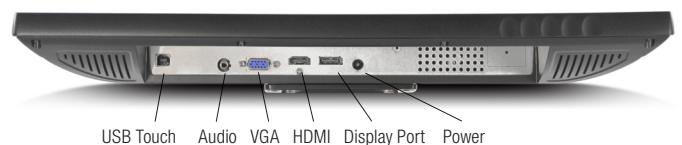

Connections

3M Touch Systems

Subsidiary of 3M Company
501 Griffin Brook Park Drive
Methuen, MA 01844 U.S.A.

1-888-659-1080

www.3M.com/touch

RoHS Directive compliant: RoHS 2011/65/EU means that the product or part does not contain any of the substances in excess of the maximum concentration values ("MCVs") in EU RoHS Directive 2011/65/EU, unless the substance is in an application that is exempt under EU RoHS. The MCVs are by weight in homogeneous materials. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M. (3/13)

IMPORTANT NOTICE TO PURCHASER: Specifications are subject to change without notice. These 3M Touch Systems' Products and software are warranted to meet their published specifications from the date of shipment and for the period stated in the specification. 3M Touch Systems makes no additional warranties, express or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose. User is responsible for determining whether the 3M Touch Systems Products and software are fit for User's particular purpose and suitable for its method of production, including intellectual property liability for User's application. If the Product, software or software media is proven not to have met 3M Touch Systems' warranty, then 3M Touch Systems' sole obligation and User's and Purchaser's exclusive remedy, will be, at 3M Touch Systems' option, to repair or replace that Product quantity or software mediator to refund its purchase price. 3M Touch Systems has no obligation under 3M Touch Systems' warranty for any Product, software or software media that has been modified or damaged through misuse, accident, neglect, or subsequent manufacturing operations or assemblies by anyone other than 3M Touch Systems. 3M Touch Systems shall not be liable in any action against it in any way related to the Products or software for any loss or damages, whether non-specified direct, indirect, special, incidental or consequential (including downtime, loss of profits or goodwill) regardless of the legal theory asserted. (7/02)

