


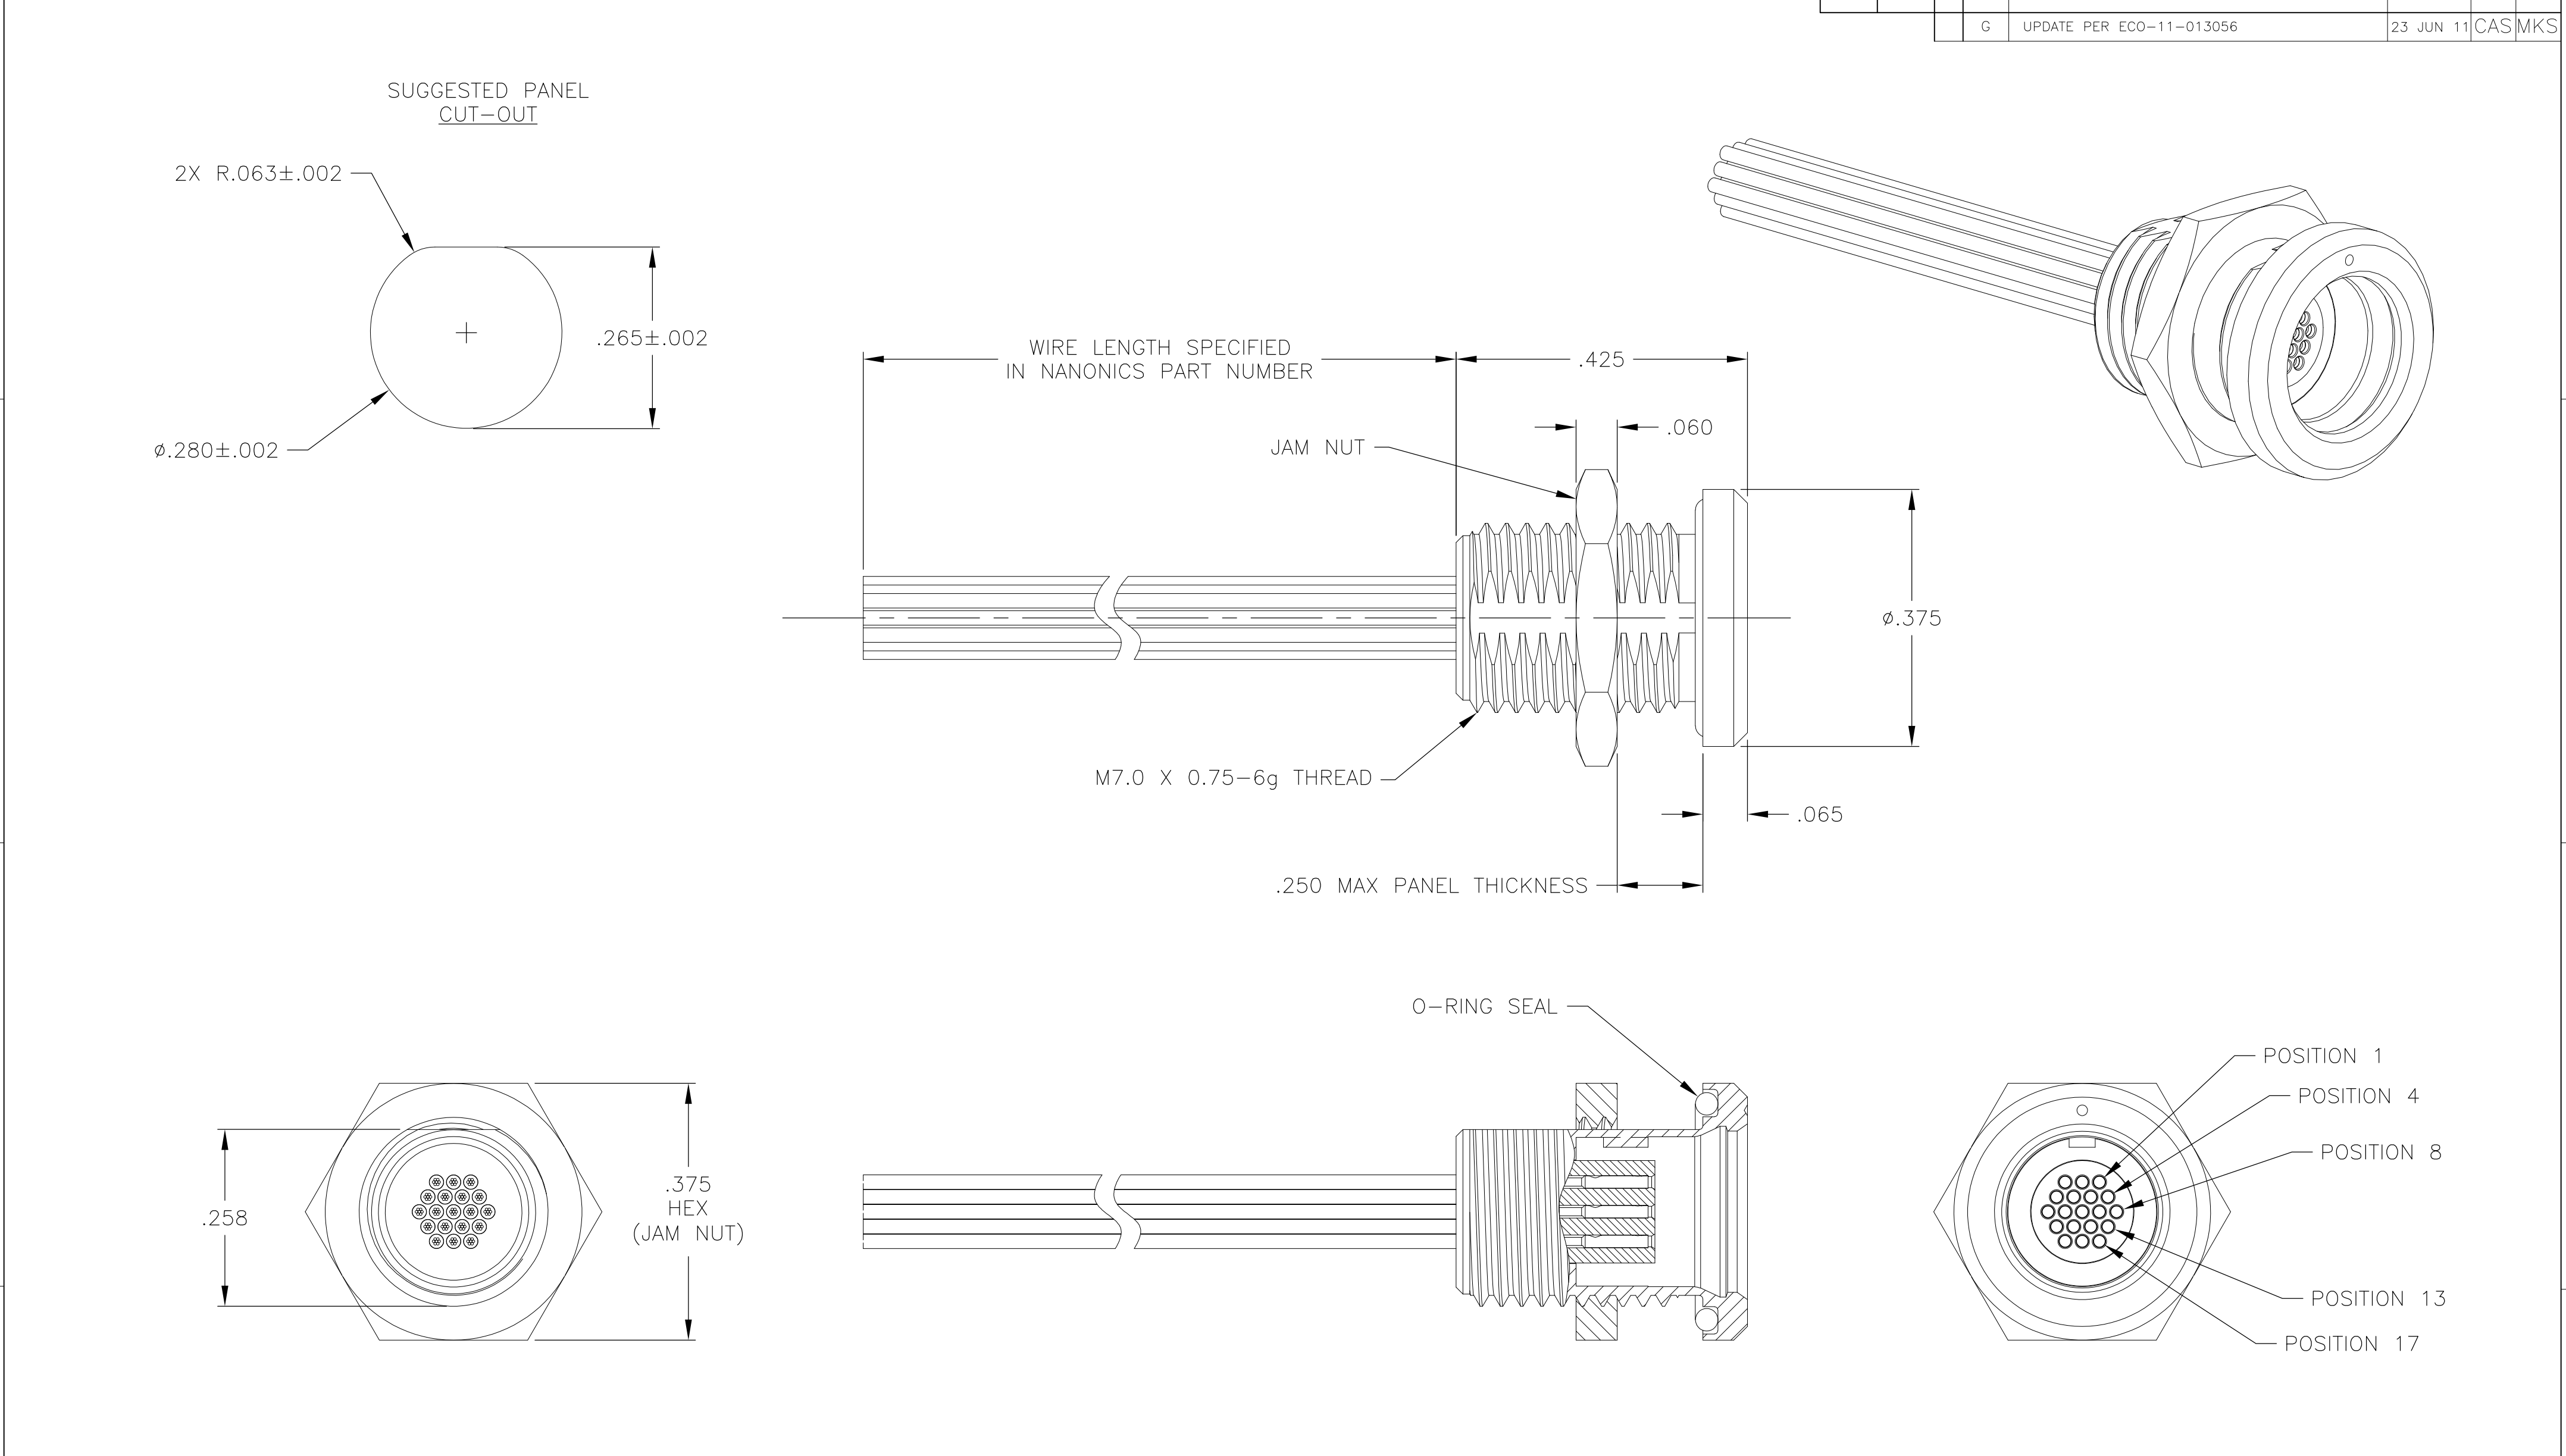

- 1
- 2
- 3
- 4
- CONNECTOR BODY AND JAM NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE
- WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
- LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0026

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES	0 PLC ± -
	1 PLC ± -
	2 PLC ± .010
	3 PLC ± .005
	4 PLC ± -
	ANGLES ± 1°

MATERIAL

SEE NOTES

FINISH

SEE NOTES

DWN

5 MAY 99

M. STORRY

CHK

7 MAY 99

E. PAULUS

APVD

26 JAN 00

S. KAIN

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

RECEPTACLE ASSEMBLY, CIRCULAR,
FLUSH MOUNT, QUICK
DISCONNECT, METAL, 19 POSITION

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	0PJN9	C=1589058	-

SCALE	SHEET	REV
6:1	1 of 1	G