

29F0818-1SR-10


**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:

A	11.43 [.450]	+ 0.18 [.007]
B	4.50 [.177]	+ 0.08 [.003] - 0.10 [.004]
B1	7.04 [.277]	+ MAX
C	4.19 [.165]	+ 0.10 [.004]
C1	4.83 [.190]	+ MAX
D	2.24 [.088]	+ 0.08 [.003]
E	1.27 [.050]	+ 0.13 [.005]

PHYSICAL DIMENSIONS:

T1	2.16 [.085]	+ 0.25 [.010]
T2	0.50 [.020]	+ TYP.
T3	0.25 [.010]	+ TYP.

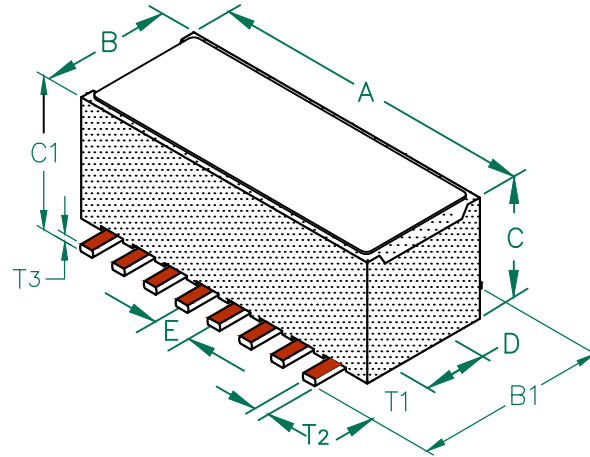


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	119	
Minimum	90	
Maximum	149	0.01 6,000 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 900 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION # CART 818-13.
4. TERMINATION FINISH IS 100% TIN.
5. OPERATION TEMPERATURE (INCLUDING SELF-HEATING): -40 ~ +125°C.


|Z|, R, AND X vs. FREQUENCY

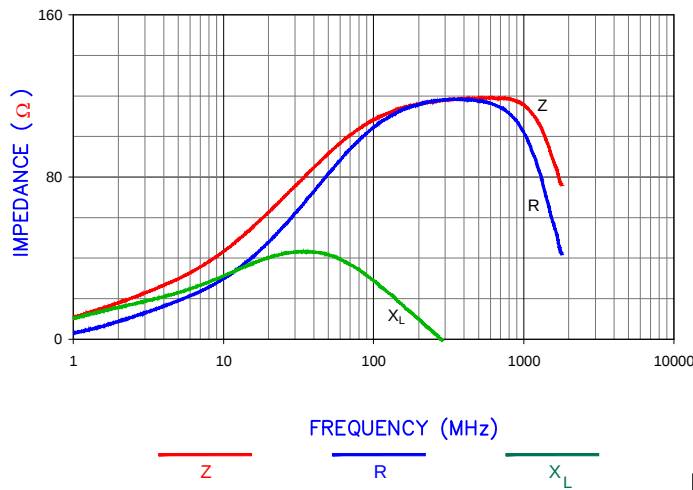

LAND PATTERNS FOR REFLOW SOLDERING

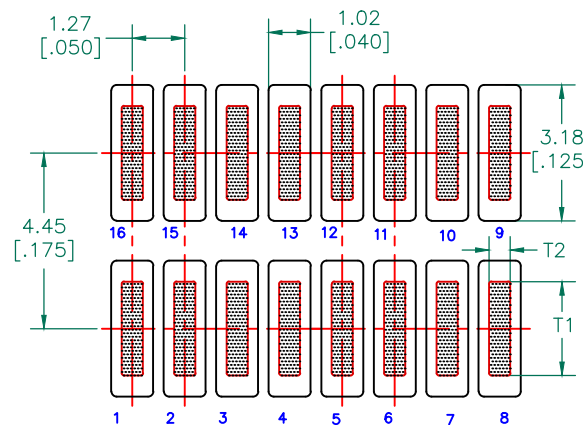

RECOMMENDED SOLDERING CONDITIONS

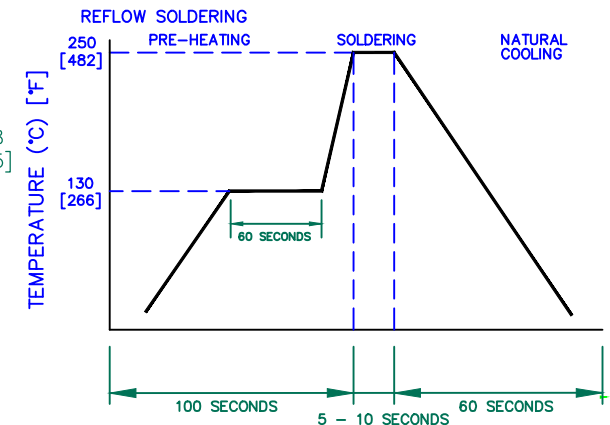

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
F	ADD NOTE 5	08/30/12	QU				
E	UPDATE COMPANY LOGO	10/22/08	JRK				
D	UPDATE COMPANY LOGO	05/04/07	JRK				
C	CHG TOLS ON E DIMS CORRECT T2 DIMS IN LANDPATTERN	03/21/07	JRK				
B	COR REV BLOCK mm [INCHES] ADD ROHS	10/19/06	JRK				
A	ORIGINAL DRAFT	04/30/04	JRK	PROJECT/PART NUMBER: 29F0818-1SR-10			
REV	DESCRIPTION	DATE	INT	DATE: 04/30/04	SCALE: NTS	REV F	DRAWN BY: JRK
29F0818-1SR-10-F-1				CAD #	TOOL # H0818	SHEET: 1 of 2	