

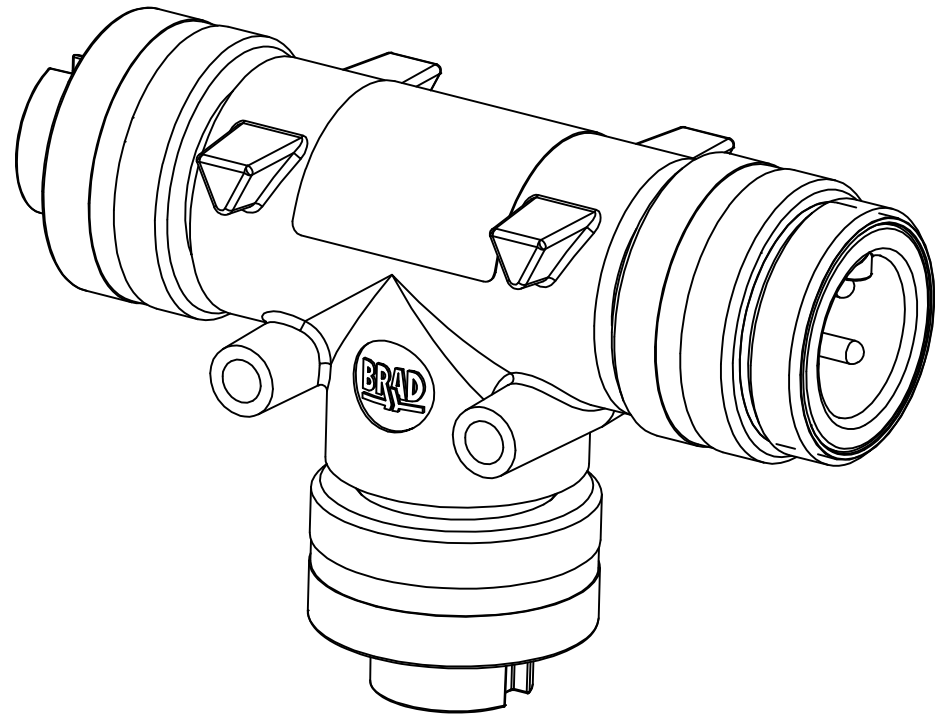
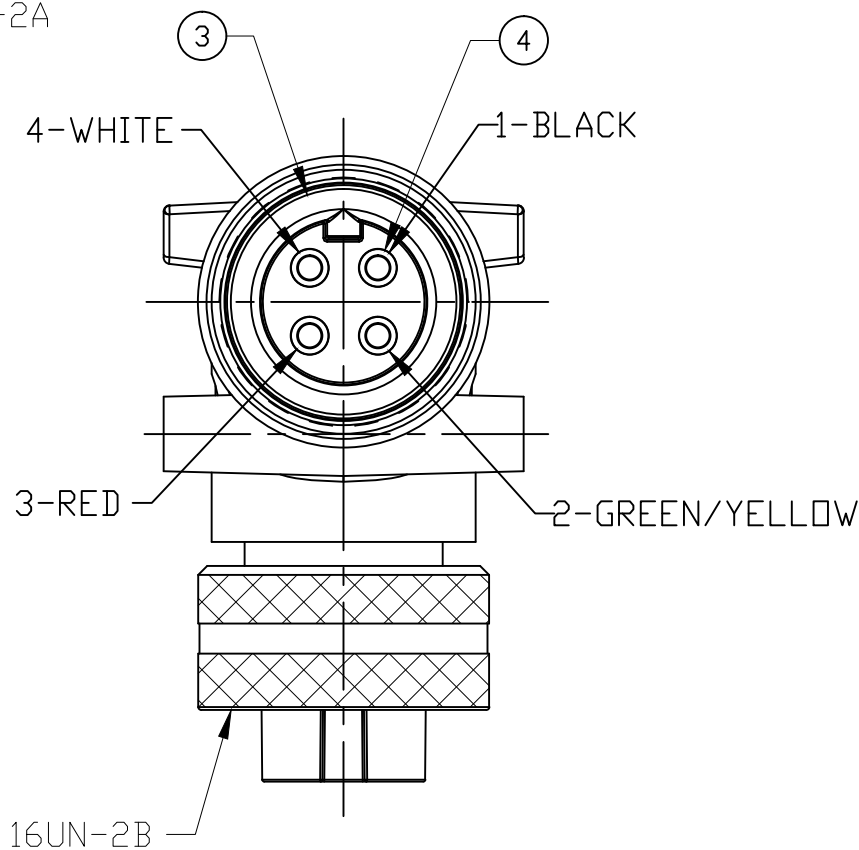
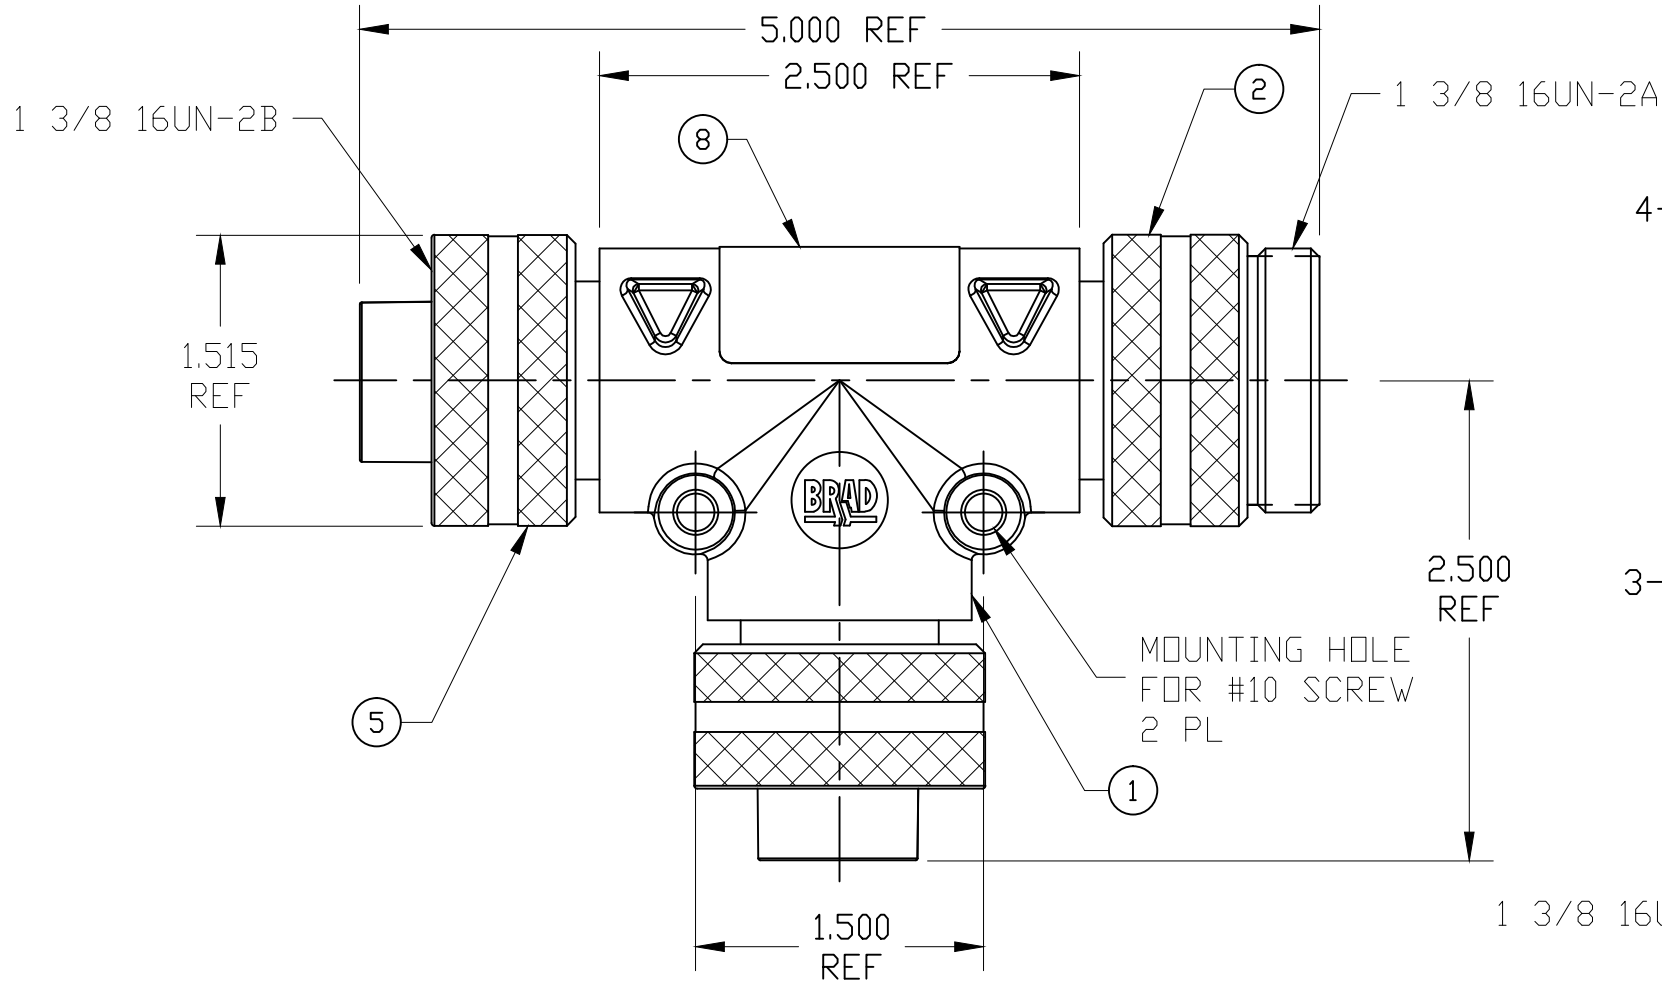
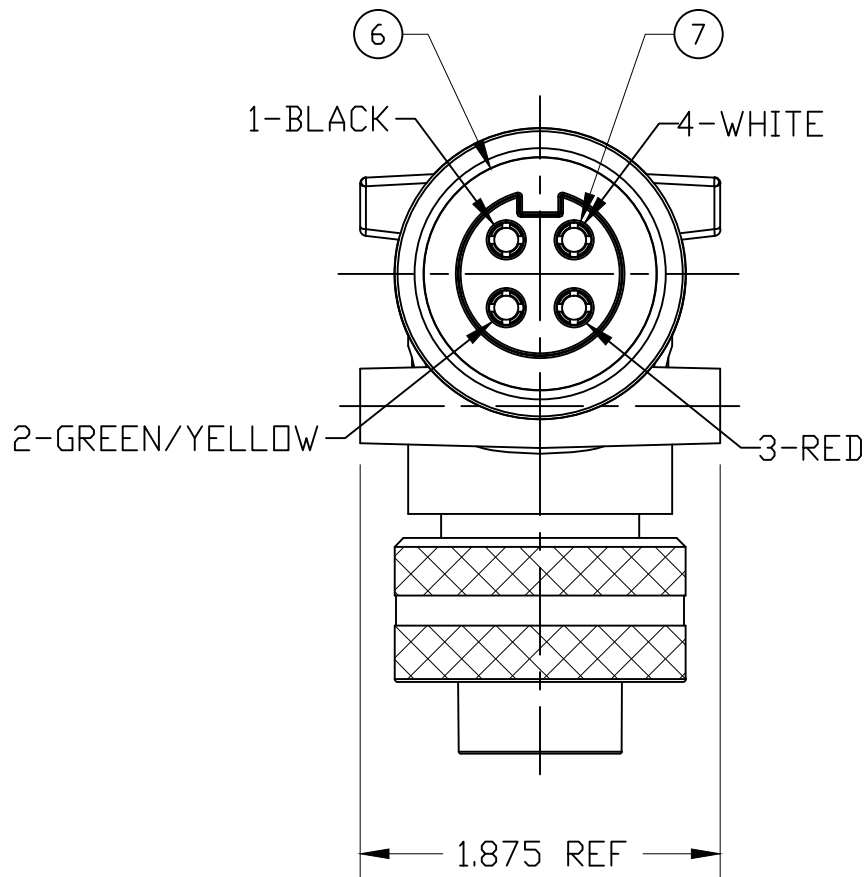



PART NUMBER	ENGINEERING NUMBER
1300680079	TC40C40-200

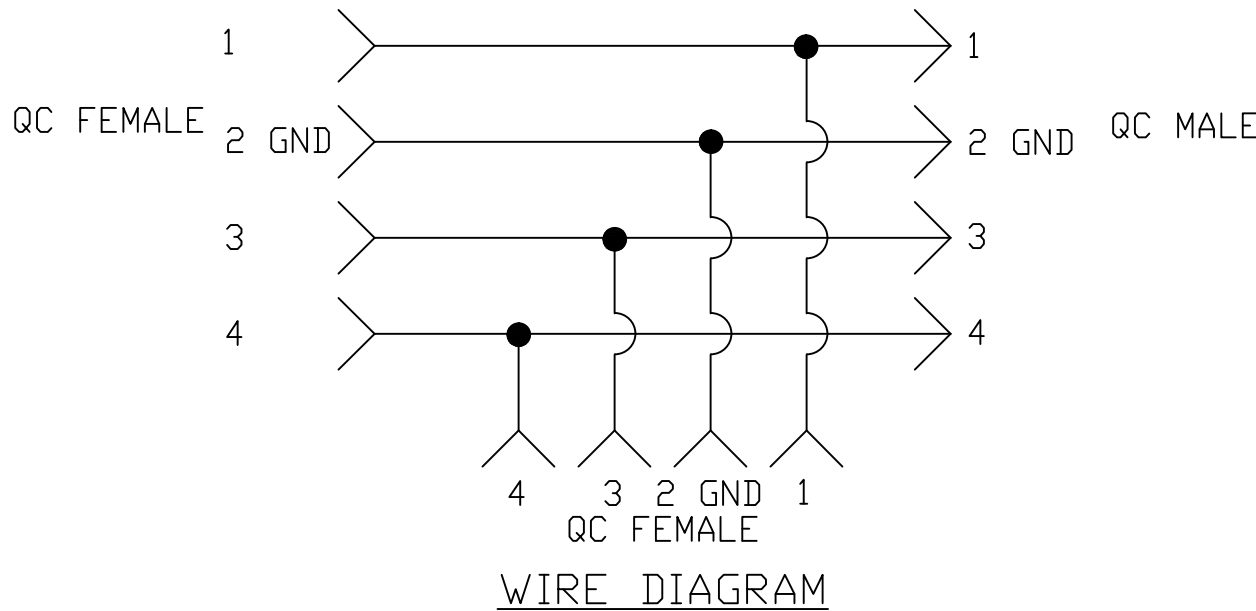

- NOTE:
- 1) LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
 - 2) ELECTRICAL DATA:
TEE QC TO QC
POLES: 4
MAX. VOLTAGE: 600V AC/DC
MAX. THRU CURRENT: 32A
MAX. DROP CURRENT: 32A
PROTECTION: IP67
TEMPERATURE RANGE: -20°C TO 90°C
 - 3) PACKAGING:
ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO THE OUTSIDE OF THE BAG.
 - 4) ASSEMBLY IS RoHS COMPLIANT
 - 5) CERTIFICATION:
UL LISTED/CSA CERTIFIED , FILE E258922

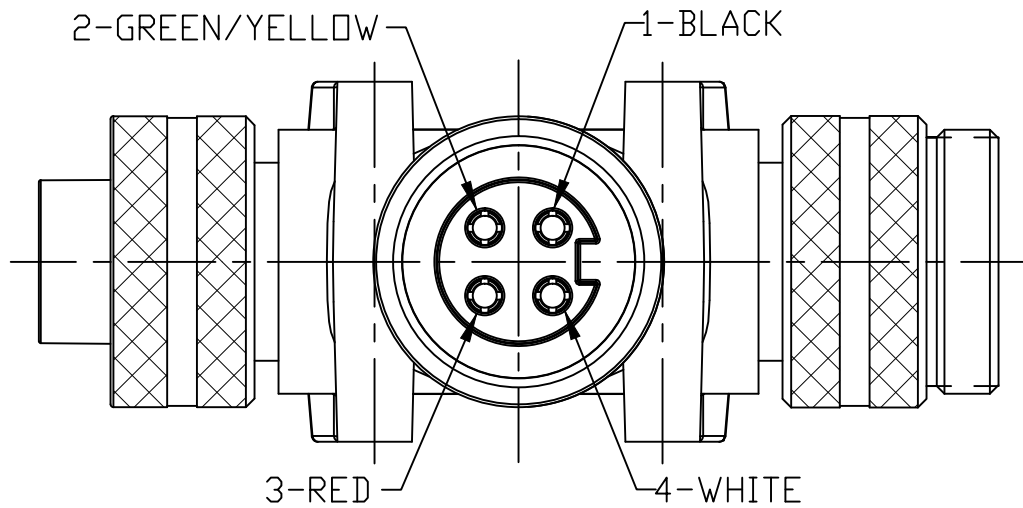

8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	8	QC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	2	QC FEMALE INSERT	PVC	BLACK
5	2	QC FEMALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
4	4	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	1	QC MALE INSERT	PVC	BLACK
2	1	QC MALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
1	1	OVERMOLD	PVC	GRAY
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

REVISED NOTES EC NO: IPG2015-1959 DRWN: GGUSTAFS 2015/05/13 CHKD: BARDEN 2015/06/30 APPR: BWOODMAN2010/01/15	DESCRIPTION	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		 =0			DRAWN BY KJOZWIK	DATE 2010/01/14	TITLE BRAD POWER QC 4 POLE TEE W/4 POLE QC DROP				
		 C=0			CHECKED BY BWOODMAN	DATE 2010/01/14					
			mm	INCH	APPROVED BY JFMURPHY	DATE 2010/01/15	MOLEX INCORPORATED				
		4 PLACES	±---	±---	MATERIAL NO. SEE TABLE						
		3 PLACES	±---	±.005			SHEET NO. 1 OF 1				
		2 PLACES	±0.13	±.010	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
1 PLACE	±0.25	±.020									
ANGULAR ±1/2°											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											
B	REV										