



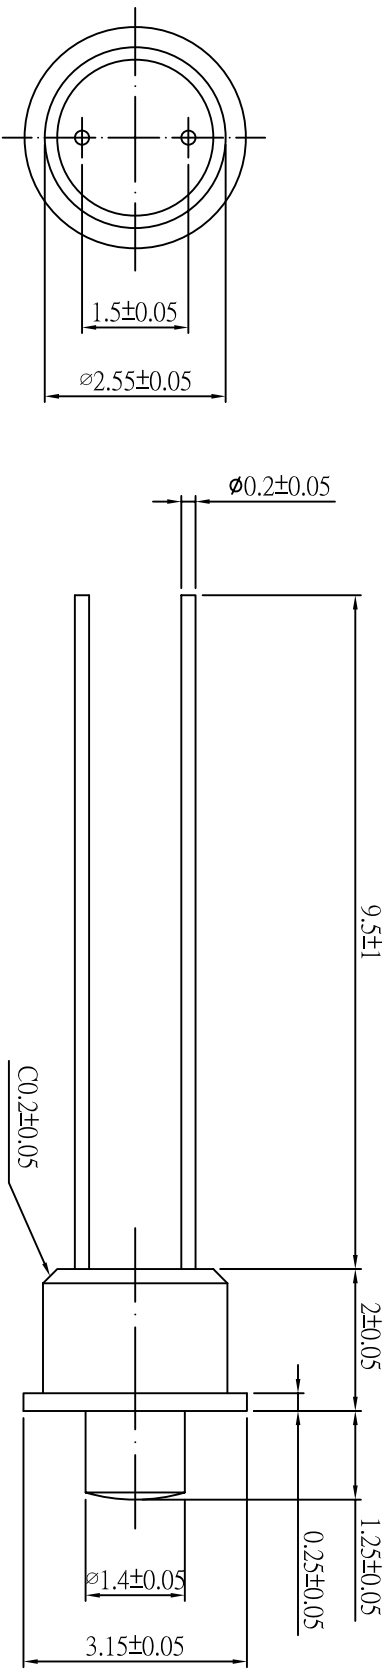

- 1. RATING : 3 V DC , 0.1 A .
- 2. CONTACT RESISTANCE : 150 m Ω MAX .
- 3. INSULATION RESISTANCE : 100V DC , 1 M Ω MIN .
- 4. OPERATING LIFE : 100,000 CYCLES .
- 5. OPERATING FORCE : 75 gf ~ 150 gf .
- 6. OPERATING TEMPERATURE : -20 $^{\circ}$ C ~ 70 $^{\circ}$ C .

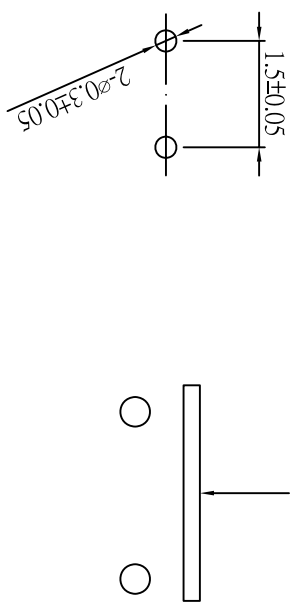

△				DATA	2006/06/30	UNIT	mm	MODE	MP SERIES PUSH SWITCH	WB Well Buying Industrial Co.,Ltd.			
△				APPROVAL	FRANK	SCALE	1 : 1	PART	MP-A11A				
△				CONFIRM	OWEN	VIEW		2D FILE NAME	MP-A11A				
	DATA	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION			DESIGN	KAVEN	VER.		01	3D FILE NAME	