

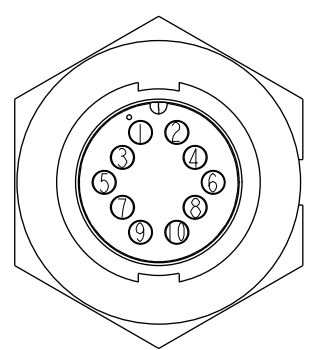
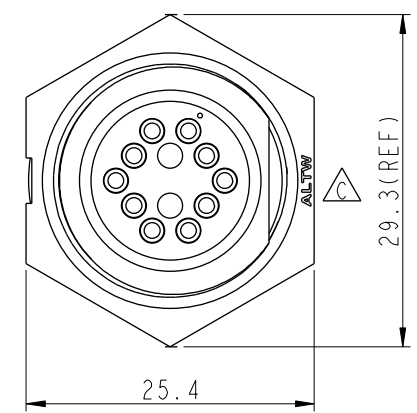
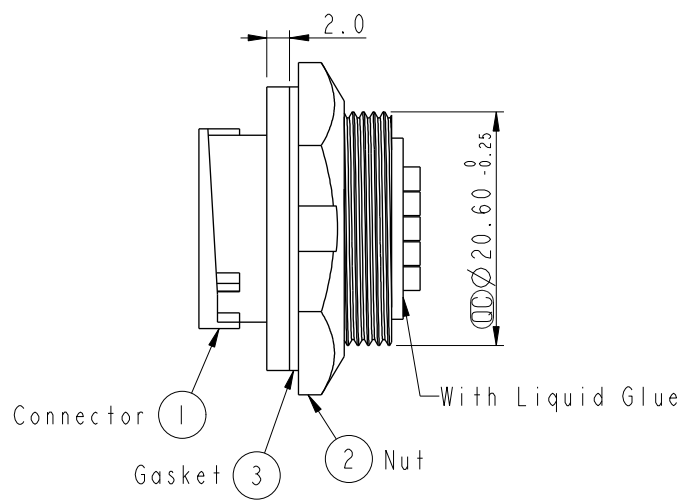
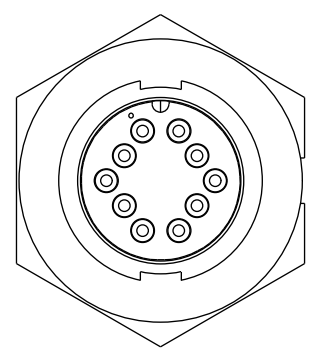


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0234	2008/10/03	Shin	Add Note
C	CI90271	2019/03/04	Ruru	Modify Note & Change Logo



Pin Assignments
Front View



Recommernded Panel Cut-Out

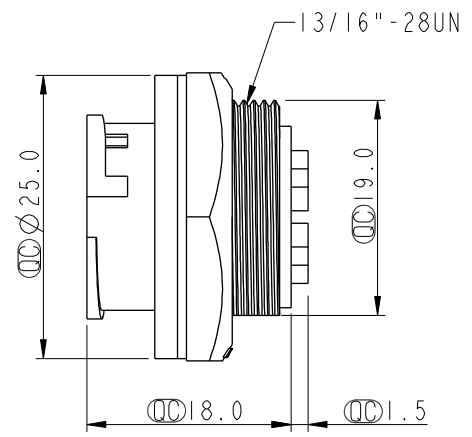

- Note:
- * Important Dimension.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 3.0mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm				TITLE Middle, Panel Lock 10Pin M Conn. M Pin		ITEM NO CD-10RMMS-LC7001		DRAWN BY Ruru		DATE 2019-03-04	
TOLERANCE		.X ±0.25		SCALE 1:1		DWG NO CD-10RMMS-LC7001		CHECKED BY Rita		DATE 2019-03-04	
.XX ±0.1		SIZE A4		SHEET 1 OF 1		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-04	
.XXX ±0.05		WC-REV. A.2		REV. C							
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司

Inspection item