

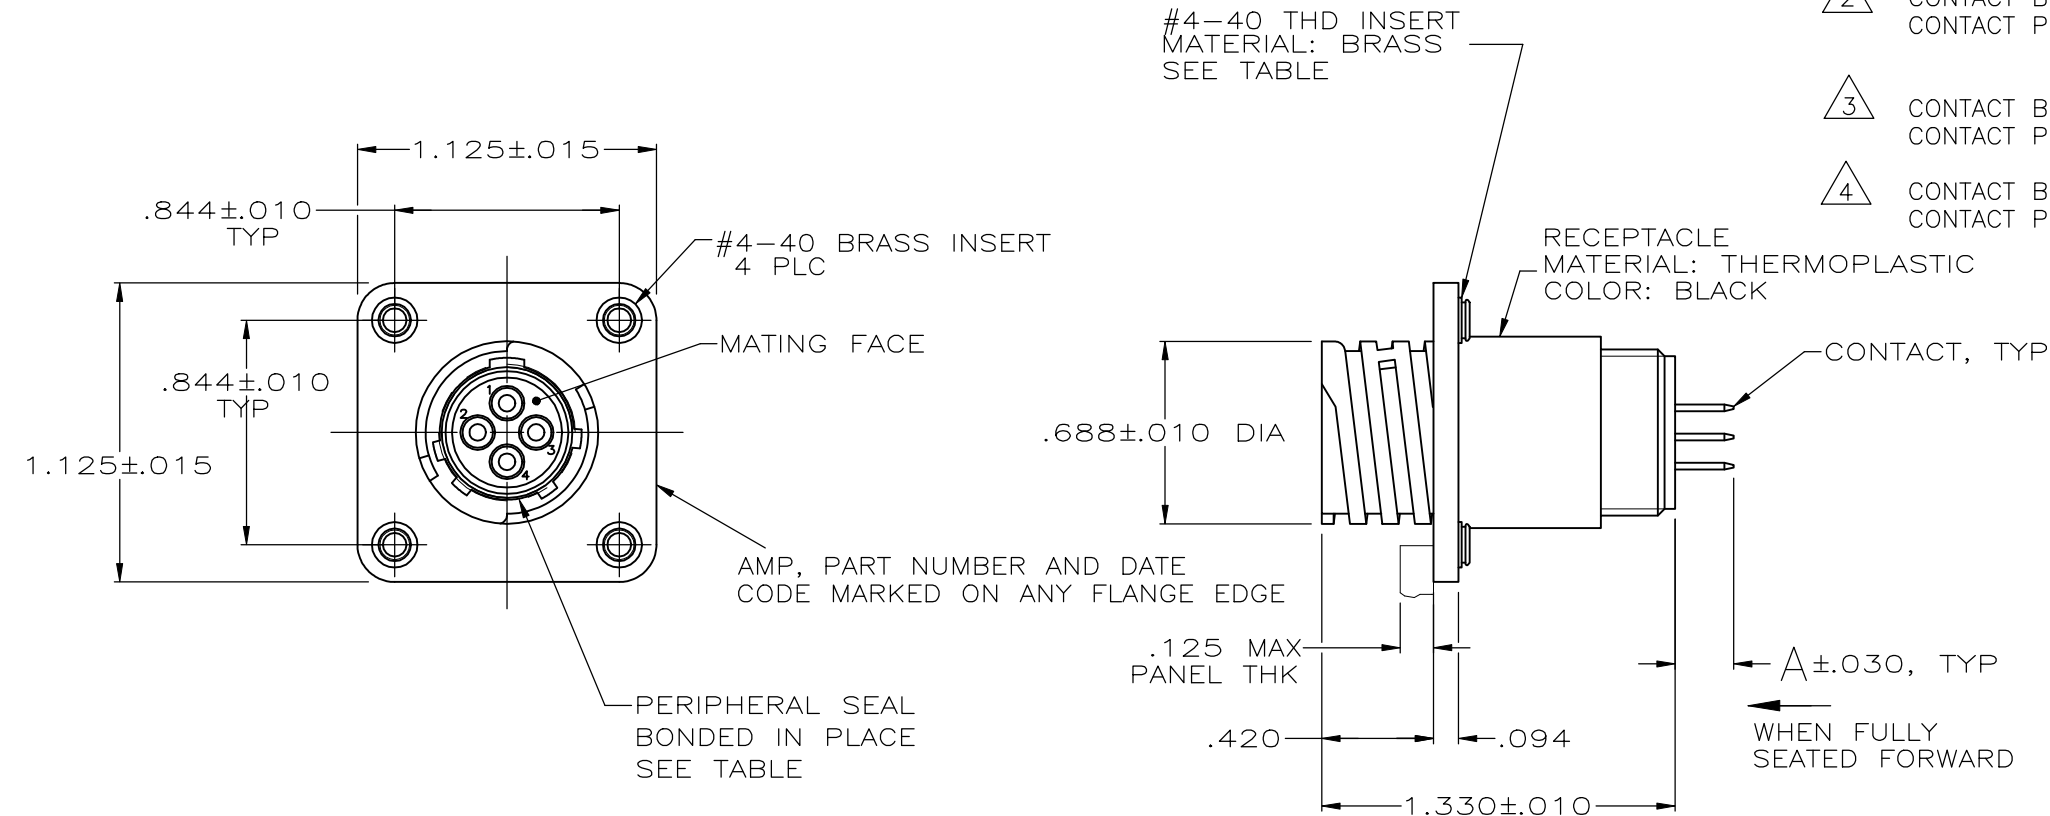


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	T	REVISED PER ECO-18-007248	17MAY2018	KH	MZ
	T1	REVISED PER ECO-18-016525	22OCT2018	RS	MZ

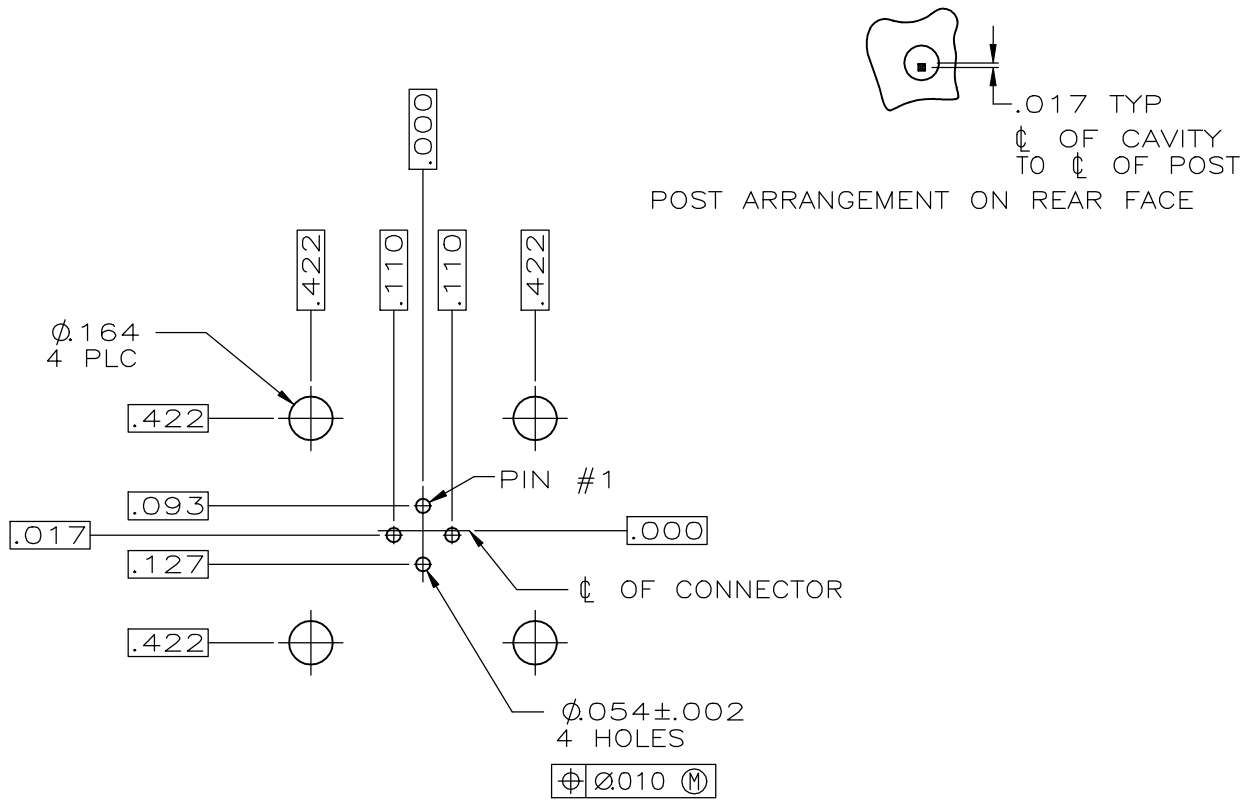

- 1 RECEPTACLE IS LOADED WITH 4 TYPE III+ POSTED PIN CONTACTS.
- △2 CONTACT BODY: GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
CONTACT POST: TIN-LEAD PER MIL-T-10727 OVER COPPER PER MIL-C-14550A.
- △3 CONTACT BODY: GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
CONTACT POST: TIN OVER COPPER PER MIL-C-14550A.
- △4 CONTACT BODY: TIN OVER NICKEL PER MIL-C-14550A
CONTACT POST: TIN OVER NICKEL PER MIL-C-14550A

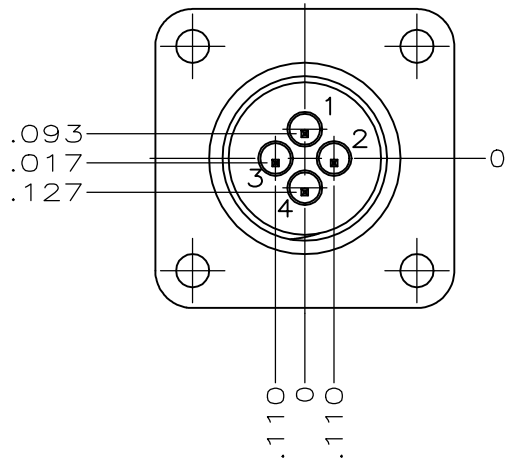

RECOMMENDED P.C. BOARD LAYOUT

	△3	△4	.220	YES	NO	1-207825-5
OBSOLETE	△3	△4	.429	YES	YES	1-207825-4
OBSOLETE	△3	△4	.119	NO	NO	1-207825-2
	△3	△4	.618	NO	YES	1-207825-1
OBSOLETE	△3	△3	.119	YES	YES	1-207825-0
	△2	△2	.119	NO	YES	207825-9
OBSOLETE	△2	△2	.220	YES	NO	207825-8
OBSOLETE	△2	△2	.429	YES	YES	207825-7
OBSOLETE	△2	△2	.119	NO	NO	207825-6
OBSOLETE	△2	△2	.119	NO	NO	207825-5
OBSOLETE	△2	△2	.618	NO	YES	207825-4
OBSOLETE	△2	△2	.119	YES	YES	207825-3
OBSOLETE	△2	△2	.220	NO	YES	207825-2
	△2	△2	.119	NO	YES	207825-1
CONTACT FINISH	A		PERIPHERAL SEAL	THREADED INSERTS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.LEE BG 7-1-91	TE Connectivity	
DIMENSIONS: INCHES		CHK W.G.LENKER 4-14-92	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		APVD -	PRODUCT SPEC 108-10024	
MATERIAL -		APPLICATION SPEC -	RESTRICTED TO -	
CONTACT: △2		WEIGHT -	SCALE 2:1	
CUSTOMER DRAWING		SHEET 1 OF 1		REV T1