


LOC	DIST	P	F	REVISIONS			
				ZONE	LTR	DESCRIPTION	DATE
AA	28				A	OBS: -2, -3; EC 0502-0269-96	22MAY97

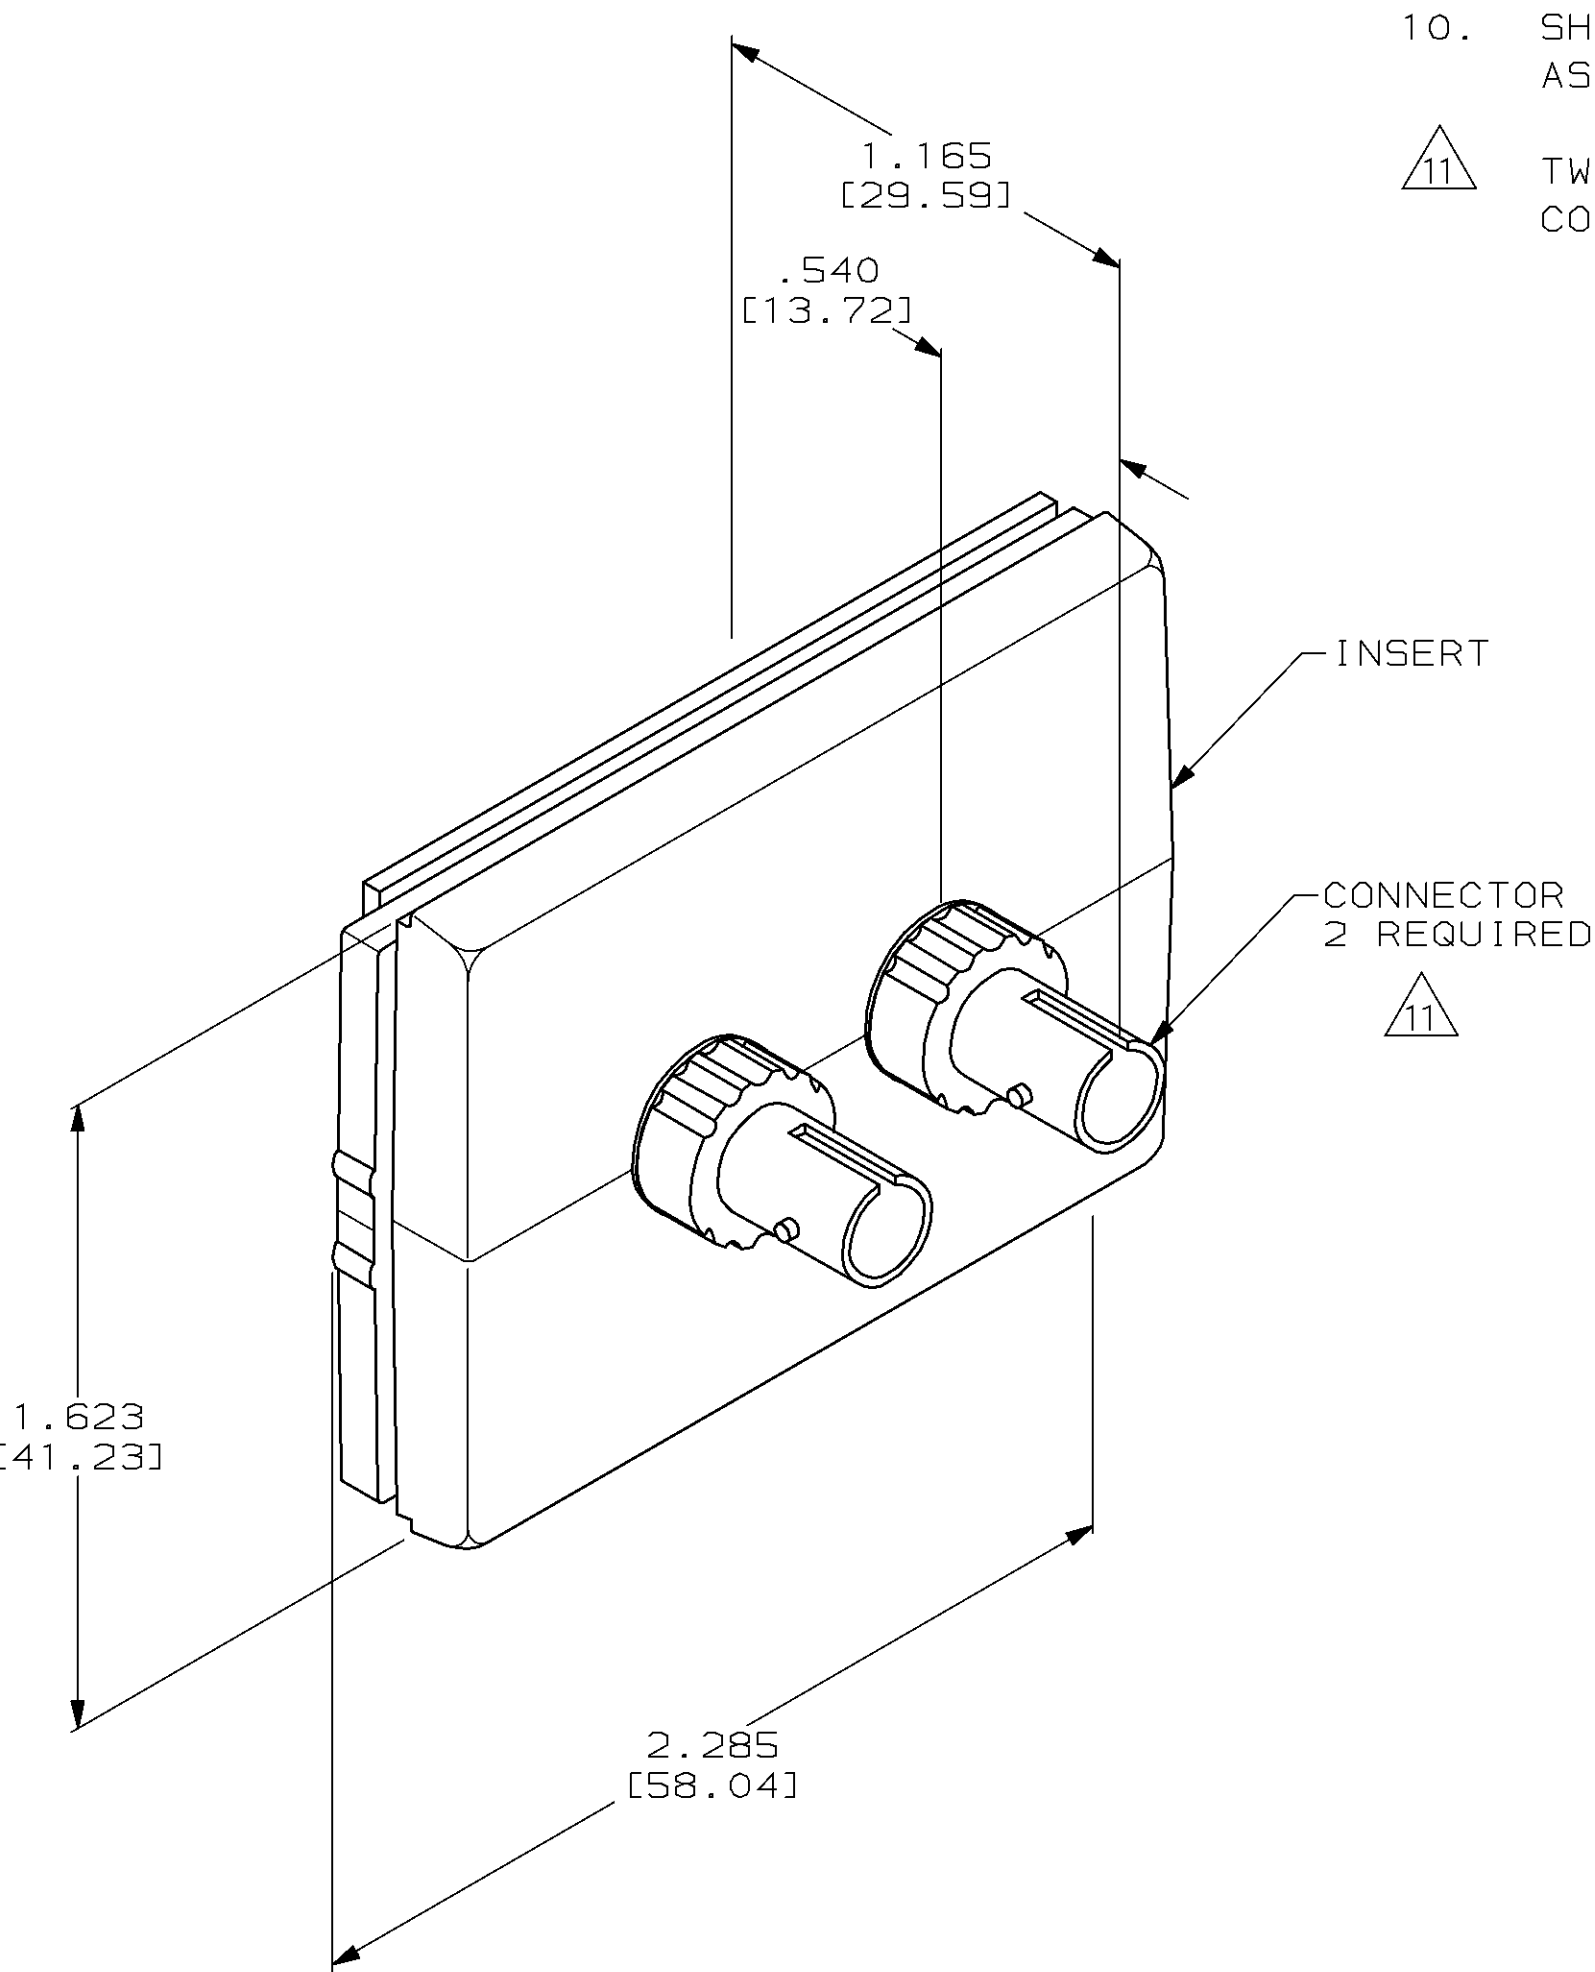

10. SHIPPING WEIGHT: 0.06 POUNDS PER ASSEMBLY.
11. TWO DUST COVERS FURNISHED ON EACH CONNECTOR, NOT SHOWN.

1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
2. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
3. DESCRIPTION: INSERT ASSEMBLY USED WITH THE SURFACE MOUNT OUTLET AS A NONPERMANENT COUPLING FOR TWO SETS OF 2.5mm FIBER OPTIC CABLES.
4. MATERIAL: INSERT - ABS MOLDING COMPOUND, 94V-0 RATED, SEE TABLE FOR COLOR. CONNECTOR: RECEPTACLE-NICKEL PLATED ZINC. RETAINER-POLYESTER MOLDING COMPOUND. SLEEVE-POLYPHENYLENE SULFIDE MOLDING COMPOUND. LOCKWASHER-STAINLESS STEEL NUT-NICKEL PLATED BRASS.
5. FEATURES:
A) MECHANICAL CONNECTION OF TWO FIBER OPTIC CABLES WITHOUT PERMANENTLY JOINING THE TWO FIBER OPTICS.
B) TWIST-ON INSTALLATION OF THE FIBER OPTIC CABLES.
C) CONTROLLED STORAGE FOR 2-3 FEET EACH OF TWO DUAL FIBERS AT THE RECOMMENDED BEND RADIUS.
6. APPROVALS: N/A
7. ELECTRICAL PARAMETERS: N/A
8. PACKAGING: ONE ASSEMBLY PER PRINTED POLYBAG.
9. MOUNTING: SNAPS INTO THE SURFACE MOUNT OUTLET.

CAD DRAWINGS
THIS DRAWING WAS CREATED ON A COMPUTER AIDED DESIGN (CAD) SYSTEM. TO INSURE THE INTEGRITY OF THE DATA BASE ALL CHANGES/ REVISIONS MUST BE MADE ON THE CAD SYSTEM.

			LIGHT ALMOND		557350-1	
			COLOR		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± 3 PLC DEC ± ANGLES ± 1		DR 4-28-92 M. MAYBERRY/UTA		AMP AMP Incorporated Harrisburg, PA 17105-3608		
		CHK 6-16-92 D. HUSSEY				
		APPD 6-16-92 S. PUCKETT		NAME INSERT ASSEMBLY, DUAL BAYONET CONNECTOR, SURFACE MOUNT OUTLET		
		APPD 6-16-92 M. MILLER				
MATERIAL 4		PRODUCT SPEC —				
FINISH 4		APPLICATION SPEC —		SIZE C	CAGE CODE 00779	DRAWING NO 557350
		WEIGHT —		SCALE 2:1		SHEET 1 OF 1