


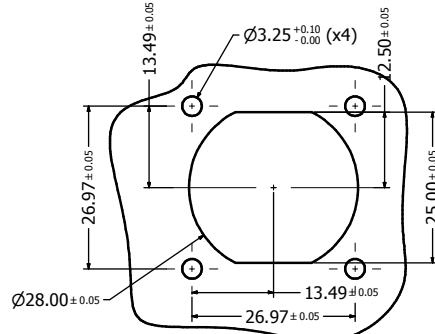
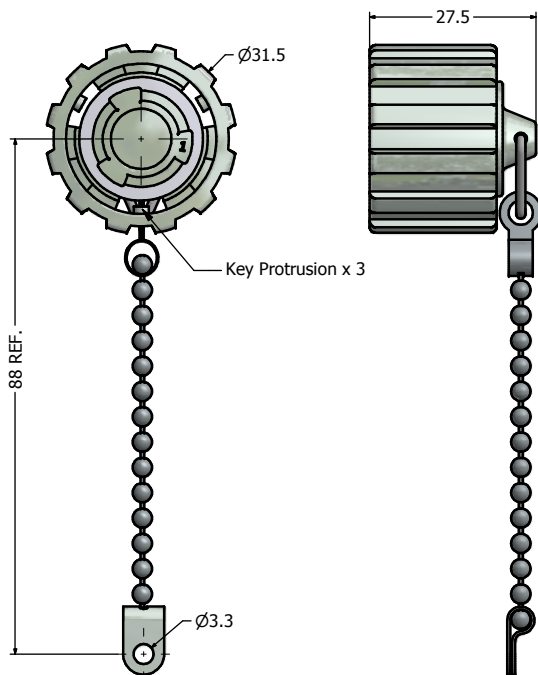


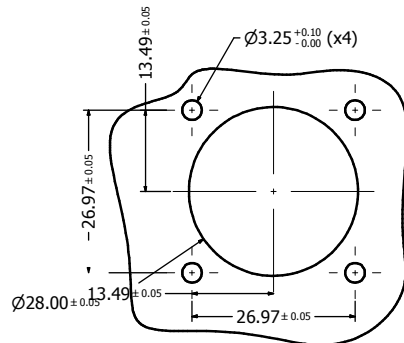



Recommended Double-D Panel Cutout



Recommended Round Panel Cutout

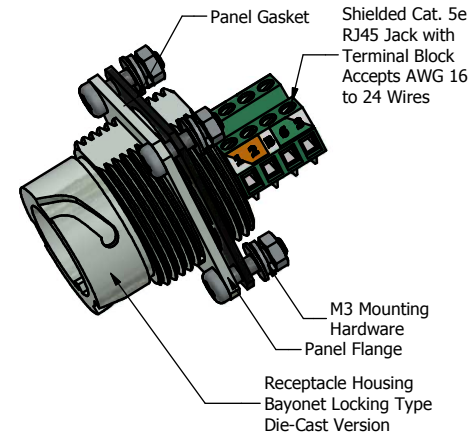

Sealed with Sealing Compound,
provides IP67 even when uncovered
(For potted version only)



Notes:

1. Electrical Specifications:

- Meets EIA/TIA-568-B.2 Cat.5e Specification
- Contact Resistance: 20 mOhm max.
- Insulation Resistance: 500MOhm min. @ 100 VDC
- Current Rating: 1.2A max. at 25°C
- Working Voltage: 100 VDC
- DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
- Operating Temperature: -40°C to +85°C

2. Material and Finish:

- Receptacle Housing (with Flange) & Cover: Zinc Die-Cast, Finish: Nickel Plated
- Cover Gasket: Silcon, Color: White
- Ball Chain Assembly, Copper Alloy and Stainless steel, Nickel Plated
- RJ45 Jack Metal Shell: Copper Alloy, Nickel Plated
- RJ45 Jack Plastic Housing: Glass filled PBT UL94 V-0, Color: Black
- RJ45 Jack Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel
- Terminal Block Insulator: Polyamide, UL94 V-0 Rated
- Terminal: Brass, Tin Plated
- Gage Clamp: Brass, Tin Plated
- M2 Screw: Steel, Zinc Plated
- Panel Gasket: NBR, Color: Black
- M3 Mounting Hardware: Stainless Steel
- Includes 4 x (Screw + Nut + Flat Washer + Spring Lock Washer)

3. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.

4. IP67 rated when covered or fully mated with the appropriate mating connector

5. Hardware shipped unassembled

6. Recommended mounting torque is 12 to 14 lb-inch

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Nickel Plated Zinc Die-Cast with Cat5e RJ45 Jack with Terminal Block + Cover	17-111194
Potted Nickel Plated Zinc Die-Cast with Cat5e RJ45 Jack with Terminal Block + Cover	17-111204

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	Customer:			Tolerance Unless otherwise specified 0 PLC ±0.30 1 PLC ±0.20 2 PLC ±0.10 3 PLC ±0.05 ANGLES ±1°			Scale:		Dim. in mm			
							Material: See Notes					
	Name		Title		Approval Date		Cat. 5e RJ45 + Terminal Block Receptacle (with Flange) + Cover Kit Nickel Plated Zinc Die-Cast Version					
							2012		Date		Name	
							Draw.		Nov. 22		Vincent Ke	
							Appd.		Nov. 22		J. Chaudry	
							Norm					
							D-old					
												
a		original						Drawing No.: 17K1A385		DIN A3		
Rev.		Changes		Date		Name		Part No.: SEE PART NUMBER TABLE		Sheet 1/1		