



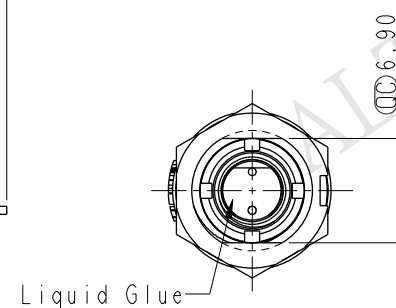
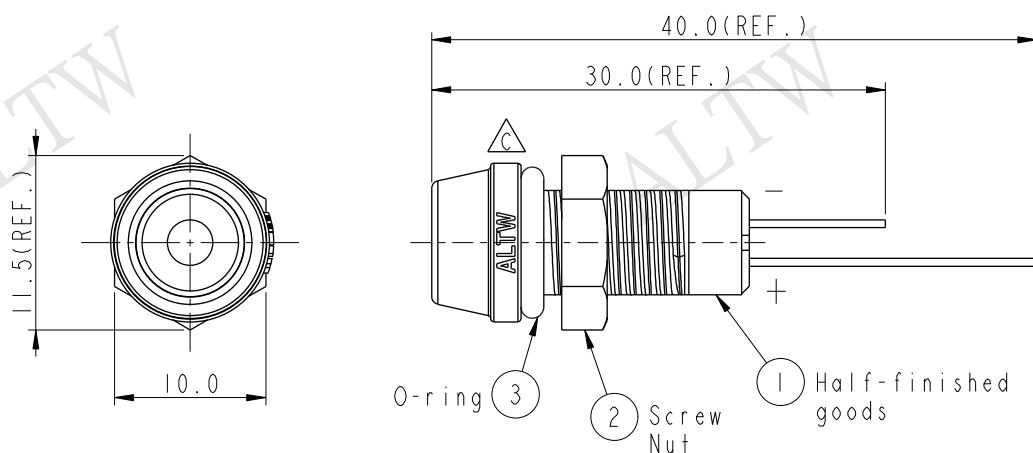



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-930469	2009/03/04	ZhaoRongFu	Add Waterproof Rate
C	LEN1650814	2016/05/25	Ruru	Change Logo

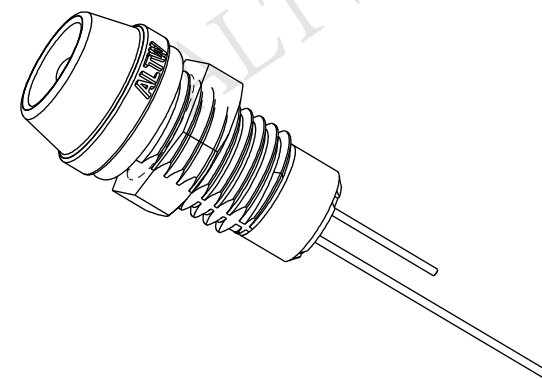

Recommended Panel Cut-Out

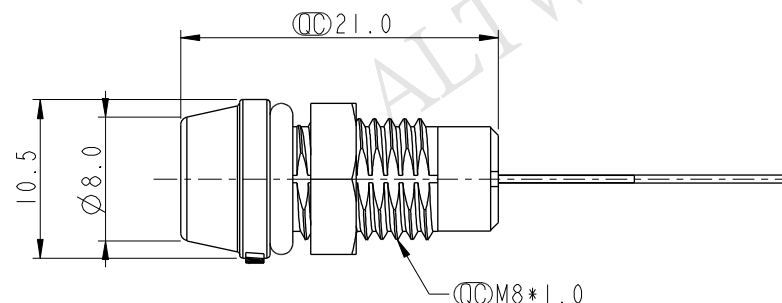

- Notes:
- * $\varnothing$ Important Dimension To Check
 - * Waterproof Rate: IP67
 - * LED Holder: PC+ABS, Black
 - * LED: $\varnothing 3$ mm, Blue(高亮度)
 - * O-ring: EPDM, Black
 - * Screw Nut: Nylon+GF
 - * Operating Voltage: DC 4V
 - * Operating Temperature: -40~+80°C
 - * For Panel Thickness 6.5mm Max.



UNIT:mm				TITLE $\varnothing 3$ mm Plastic LED ,Blue		ITEM NO L08-01BAAS-PR7001		DRAWN BY Ruru		DATE 2016-05-25	
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$		SCALE 2:1		SIZE A4		DWG NO L08-01BAAS-PR7001		CHECKED BY Rita		DATE 2016-05-25	
REV. C		WC-REV. A.3		SHEET 1 OF 1		CUSTOMER ALTW		APPROVED BY Lisa		DATE 2016-05-25	
				$\varnothing$ Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司