





| REV. | ECN NO.    | DATE       | SIGN | DESCRIPTION |
|------|------------|------------|------|-------------|
| B    | LEN1630256 | 2016/03/01 | Ruru | Change Logo |
| C    | CI90310    | 2019/03/08 | Ruru | Modify Note |
|      |            |            |      |             |

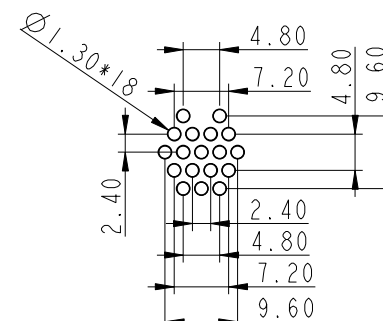




Pin Assignments  
Front View 前視圖

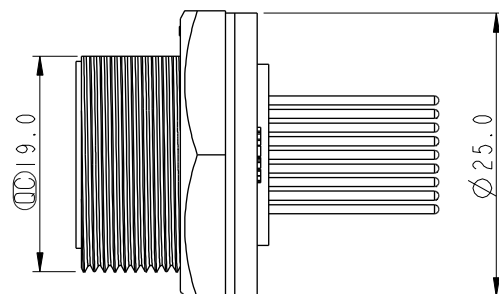

18 Pin Male Connector  
Male Pin PCB Layout




Recommended Panel Cut-Out

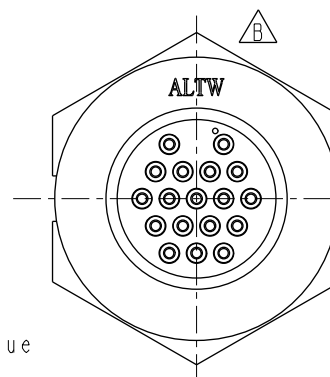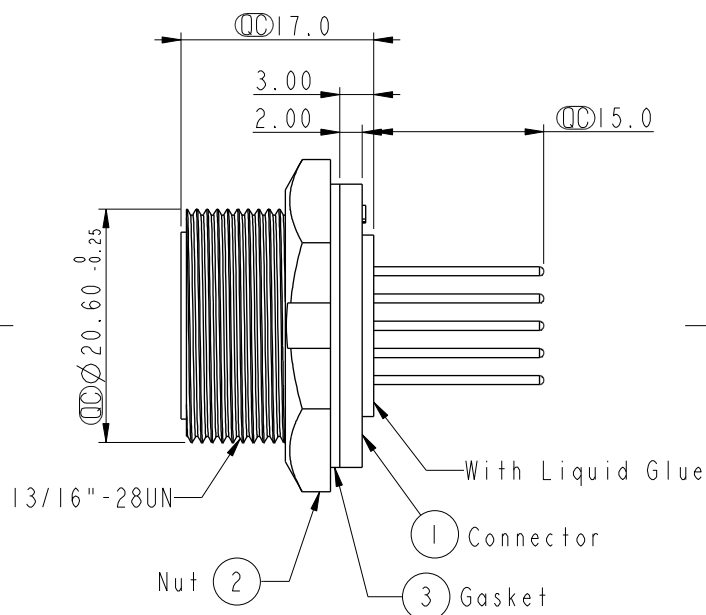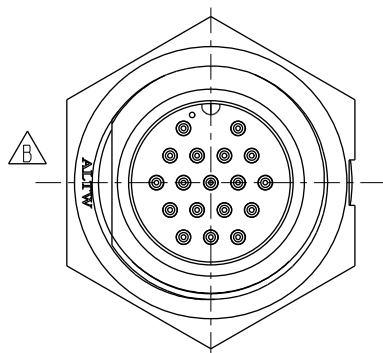


Note:  $\triangle C$

- \*  $\odot$  Important Dimension.
- \* Waterproof Rate: IP67, Unmated
- \* Housing: Thermoplastic, Black
- \* Pin: Copper Alloy, Gold Plated
- \* Nut: Thermoplastic, Black
- \* Gasket: Rubber, Black
- \* Use with waterproof cap or dust cap  
For Panel Thickness Max: 2.0mm
- \* Use without waterproof cap or dust cap  
For Panel Thickness Max: 3.0mm
- \* Gasket and Nut are packed separately  
in PE bags.



UNIT:mm



TOLERANCE  
.X  $\pm 0.25$   
.XX  $\pm 0.1$   
.XXX  $\pm 0.05$   
ANGLES  $\pm 1^\circ$

|                                        |                |                         |  |
|----------------------------------------|----------------|-------------------------|--|
| TITLE<br>18Pin Male Connector Male Pin |                |                         |  |
| SCALE<br>1:1                           | SIZE<br>A4     | SHEET<br>1 OF 1         |  |
| REV.<br>C                              | WC-REV.<br>A.3 | $\odot$ Inspection item |  |

Amphenol LTW  
安費諾亮泰企業股份有限公司

|                              |                    |                    |
|------------------------------|--------------------|--------------------|
| ITEM NO.<br>CU-18PMMP-SC7002 | DRAWN BY<br>Ruru   | DATE<br>2019-03-08 |
| DWG NO.<br>CU-18PMMP-SC7002  | CHECKED BY<br>Rita | DATE<br>2019-03-08 |
| CUSTOMER<br>ALTW             | APPROVED BY<br>Max | DATE<br>2019-03-08 |