

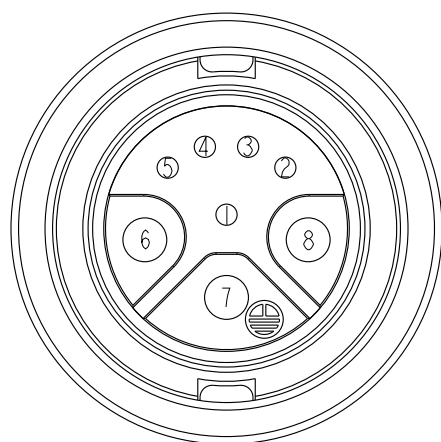




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1350058	2013/04/24	Ruru	Modify Cable OD Max
C	LEN1670219	2016/07/18	Joyy	Modify The Color Of The Gasket

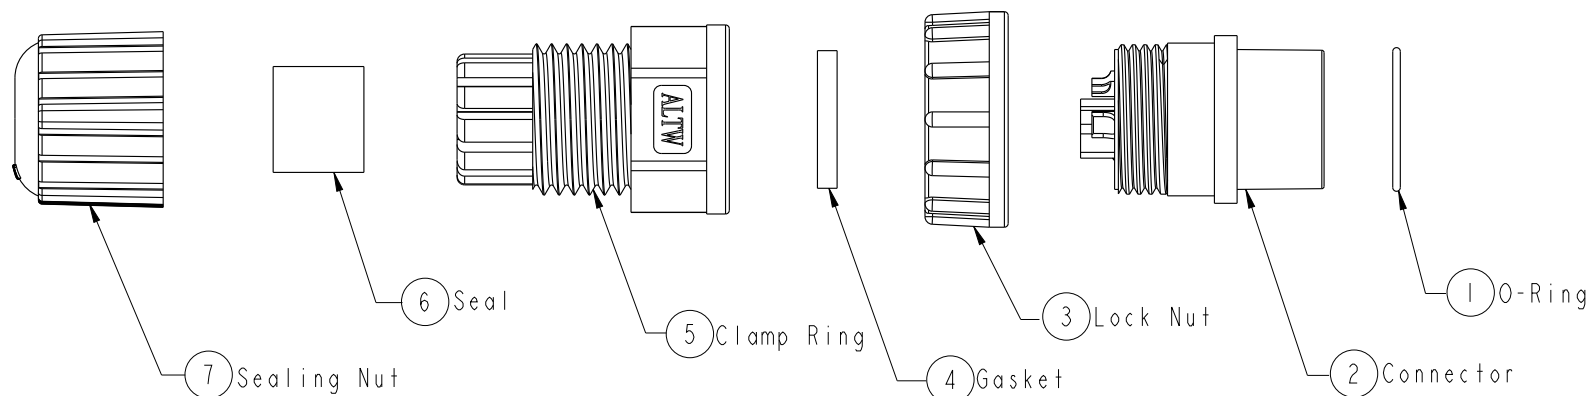

Conn.
Pin Assigments
Front View

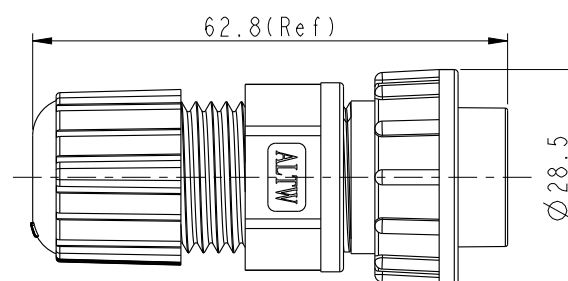

Note:

- * Important Dimension To Check
- * Waterproof Rate: IP67
- * O-Ring: Silicone, Gray
- * Connector: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Lock Nut: Nylon+GF, Black
- * Gasket: Silicone, Black
- * Clamp Ring: Nylon, Black
- * Seal: Silicone, Gray
- * Sealing Nut: Nylon, Black
- * Cable OD Max: $\varnothing 9.5 \sim \varnothing 10.8 \text{mm}$

UNIT:mm		
TOLERANCE		
.X	± 0.25	
.XX	± 0.1	
.XXX	± 0.05	
ANGLES	$\pm 1^\circ$	

TITLE Large Assy Connector FConn 3MPin(20A)+5FPin(2A)			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. B.2	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO DCU-08BF EA-LL7001	DRAWN BY Joyy	DATE 2016-07-18
DWG NO DCU-08BF EA-LL7001	CHECKED BY Ma Fei	DATE 2016-07-18
CUSTOMER ALTW	APPROVED BY Joyy	DATE 2016-07-18