


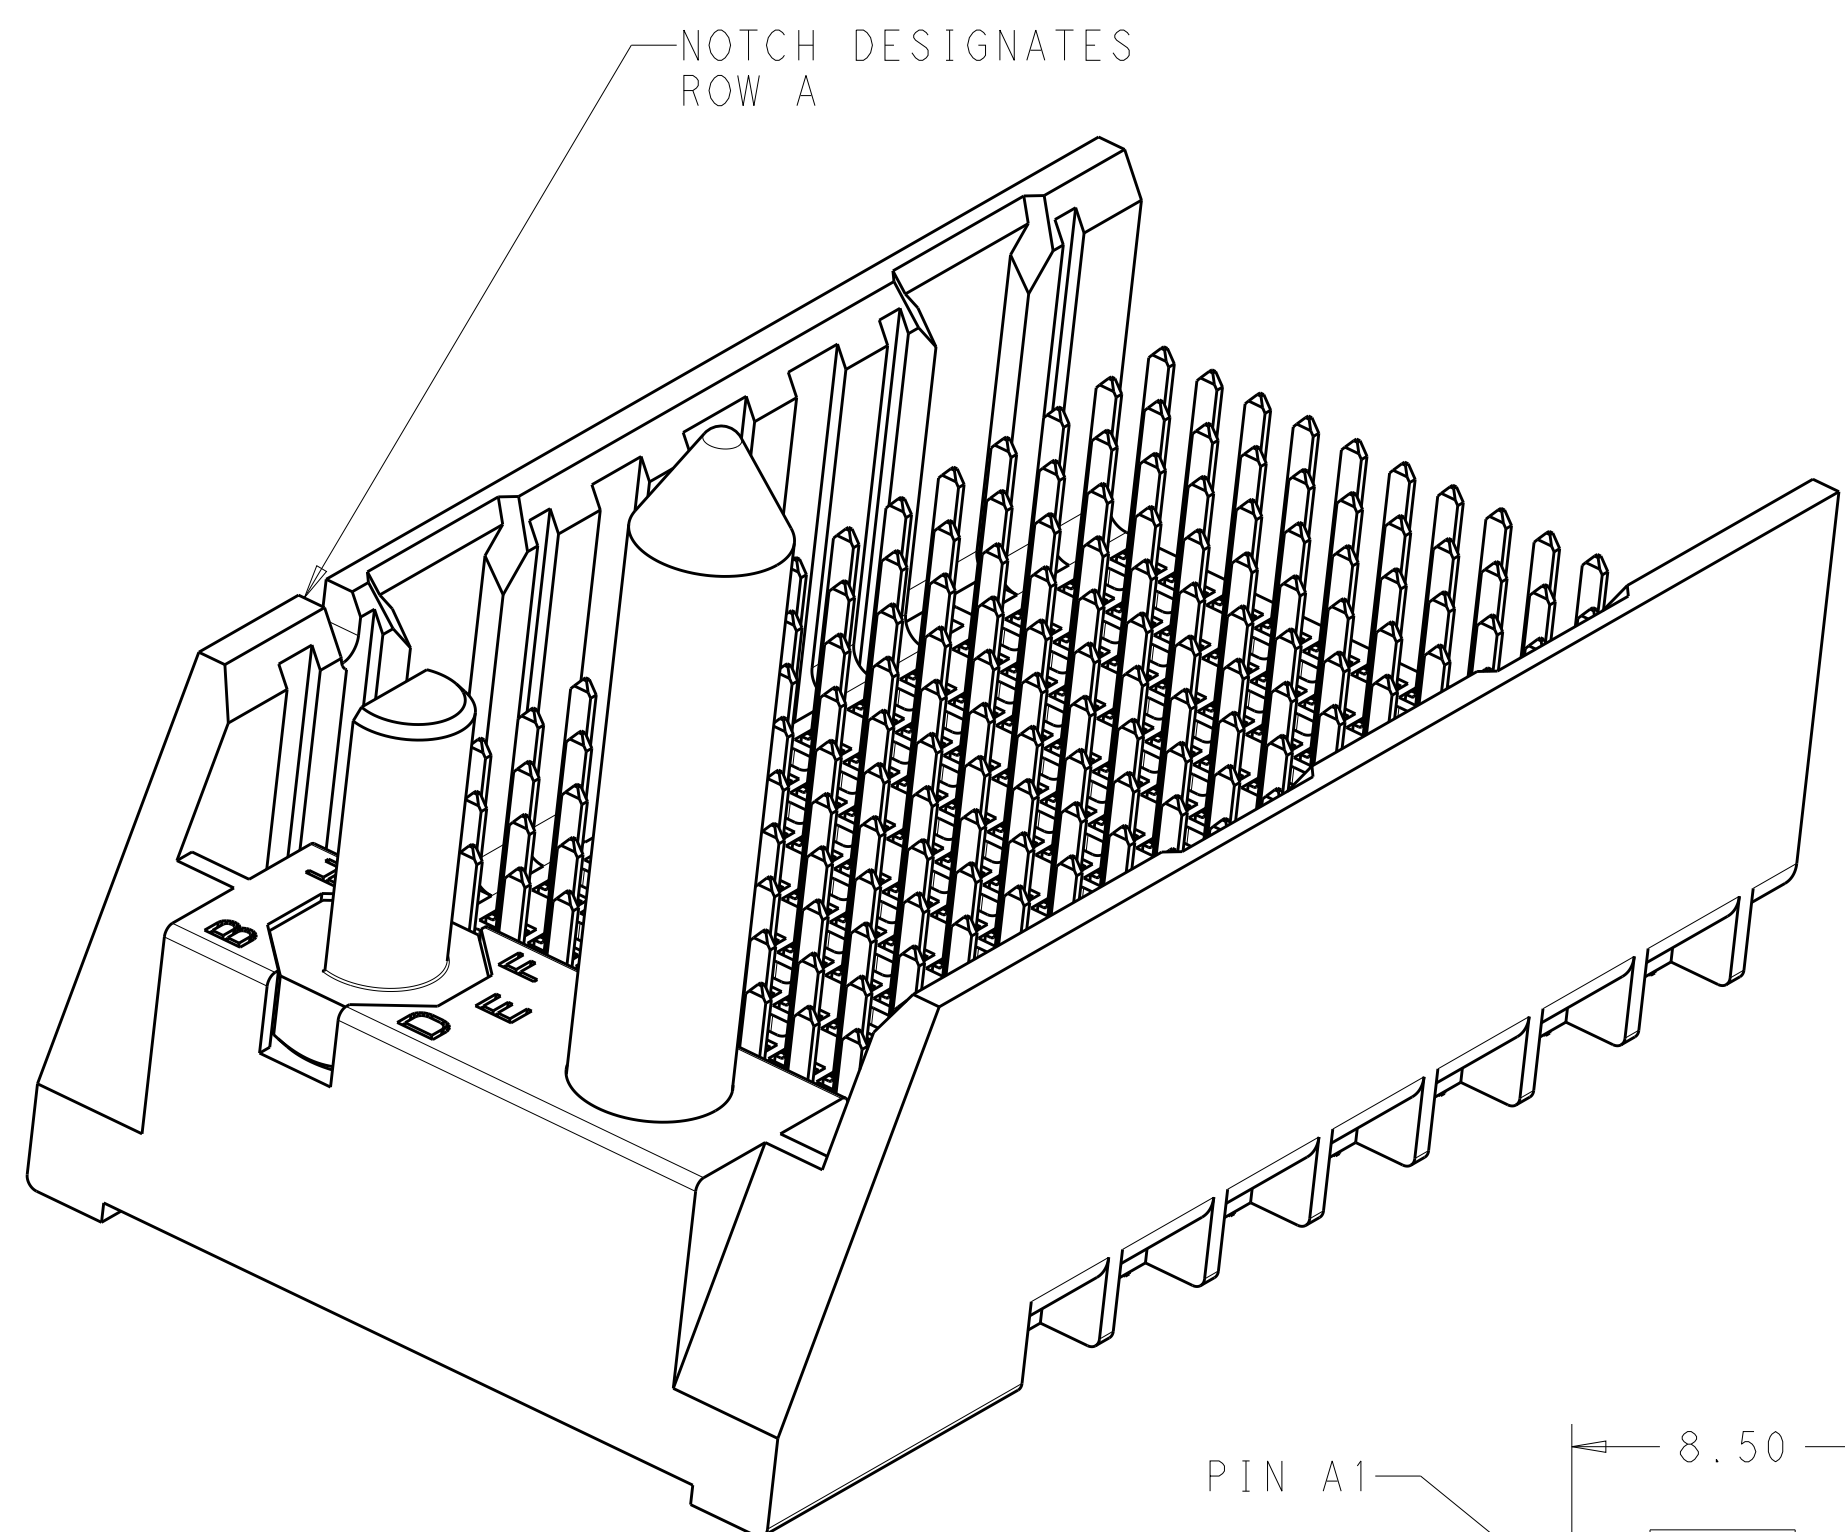

PIN A1

KEEP-OUT ZONE

8.50

28.50

1.90 TYP

0.95

SIGNAL HOLES REF

GROUND HOLE REF

ROW A

ROW B

ROW C

ROW D

ROW E

ROW F

ROW G

ROW H

ROW J

ROW K

ROW L

ROW M

20.8

14.85

2.95

11.42

1.35 TYP

$\varnothing 3.56 \pm 0.08$

UNPLATED


4.75

192X $\varnothing 0.39 \pm 0.05$

PLATED THRU HOLE

$\varnothing 0.15$

$\varnothing 0.10$

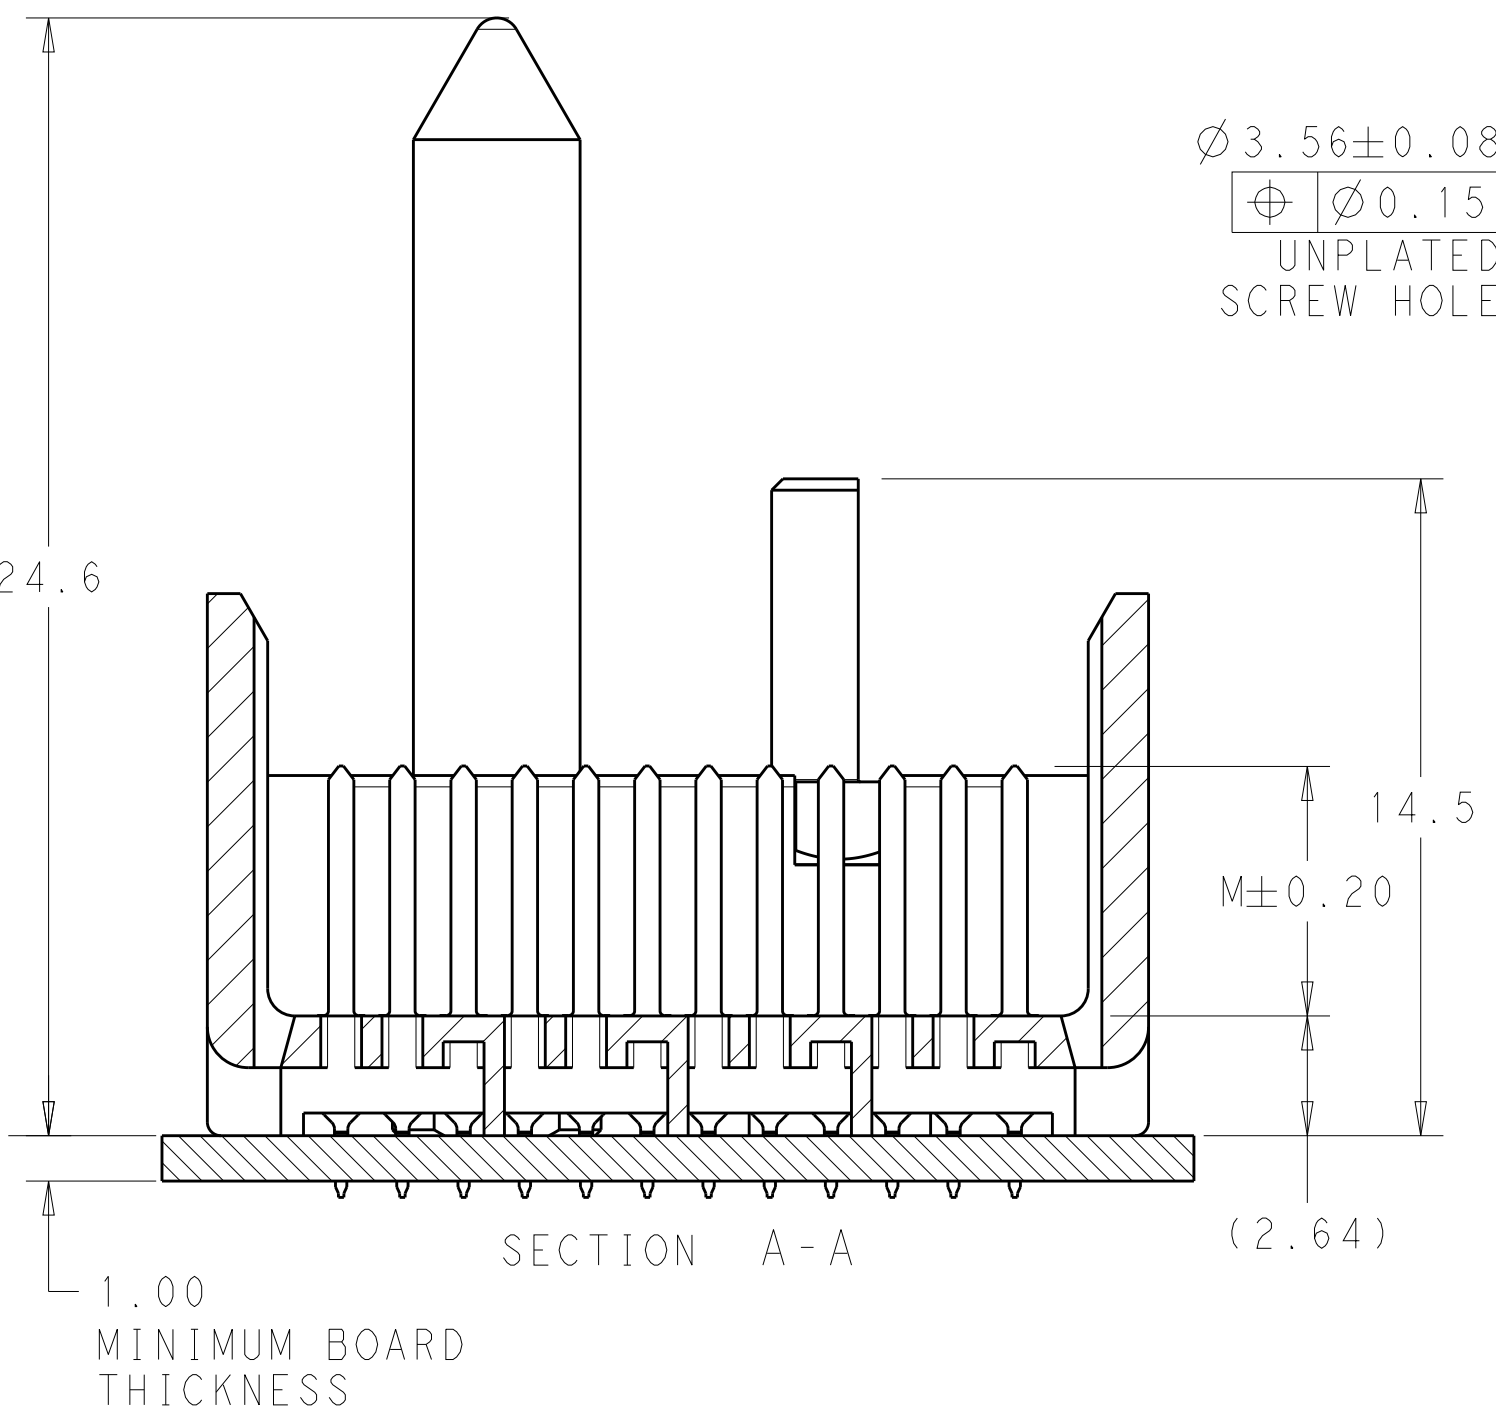

LEFT GUDIED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 13JAN2011 CHK J. EARY 13JAN2011 APP'D J. EARY 13JAN2011		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.05 1 PLC ±.13 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH SEE TABLE		NAME IMPACT, 4 PAIR, 16 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.39 PTH	
MATERIAL 		PRODUCT SPEC APPLICATION SPEC WEIGHT		SIZE CAGE CODE DRAWING NO A100779C=2007825	
		CUSTOMER DRAWING		SCALE 6:1 SHEET 1 of 2 REV A	

LOC	DIST	REVISIONS					
AD	00	P	LYR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-


	H	5.5	8-2007825-3
	H	4.9	8-2007825-2
	H	4.5	8-2007825-1
	G	5.5	7-2007825-3
	G	4.9	7-2007825-2
	G	4.5	7-2007825-1
	F	5.5	6-2007825-3
	F	4.9	6-2007825-2
	F	4.5	6-2007825-1
	E	5.5	5-2007825-3
	E	4.9	5-2007825-2
	E	4.5	5-2007825-1
	D	5.5	4-2007825-3
	D	4.9	4-2007825-2
	D	4.5	4-2007825-1
	C	5.5	3-2007825-3
	C	4.9	3-2007825-2
	C	4.5	3-2007825-1
	B	5.5	2-2007825-3
	B	4.9	2-2007825-2
	B	4.5	2-2007825-1
	A	5.5	1-2007825-3
	A	4.9	1-2007825-2
	A	4.5	1-2007825-1
	-	5.5	2007825-3
	-	4.9	2007825-2
	-	4.5	2007825-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY


KEY POSITION
CHART




NONE




A




E




B




F




C



G



D



H