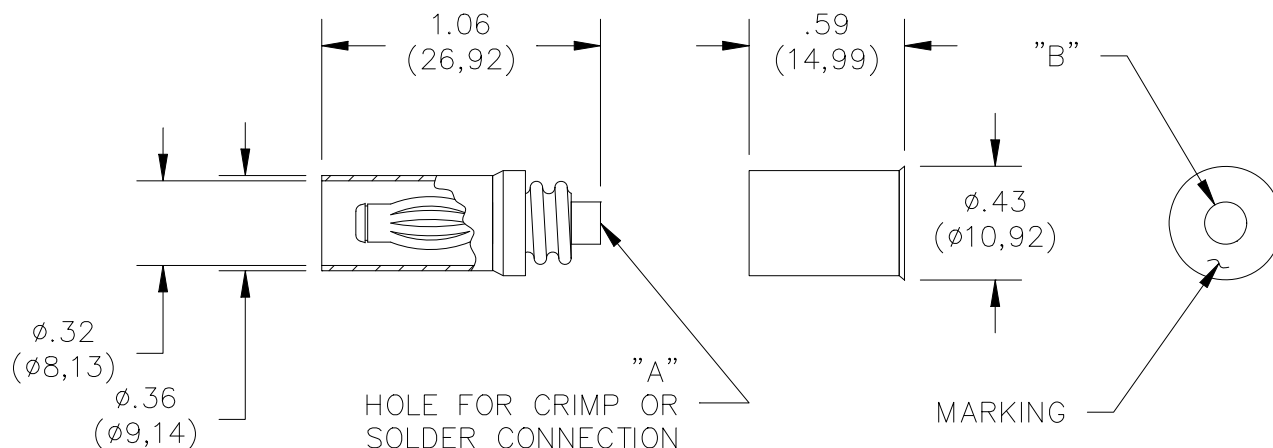


**Model 4986**  
**Do-It-Yourself In-Line Sheathed Banana Plug**

Model #	Dimension "A"	Dimension "B"	Accepts Wire AWG
4986	.120" (3.05mm)	.200" (5.08mm)	14, 16

## Features

- Threaded two piece design allows wires to be soldered or crimped to the banana plug.
- Banana plug spring is nickel plated Beryllium Copper for long insertion life.
- Fits into Pomona model 4934 Banana Jack.

## Materials

**Banana Plug:** Body – Brass, Nickel Plated  
Spring – Beryllium Copper, Nickel Plated

**Insulation:** Polypropylene, color per part number

**Threaded Handle:** Polypropylene, color per part number

**Marking:** "POMONA ELECT." & part number



## Ratings

Operating Voltage: Hands free usage in controlled voltage environments: 1200 Vrms Max.

*For CE compliance:* not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +80°C (+176°F)

Current: 15 Amperes Max.

## Ordering Information

Model: 4986-**Color**

**Colors** = -0 (Black), -2 (Red)

**Ordering Example:** 4986-2 (Banana Plug with Red insulation)

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.